


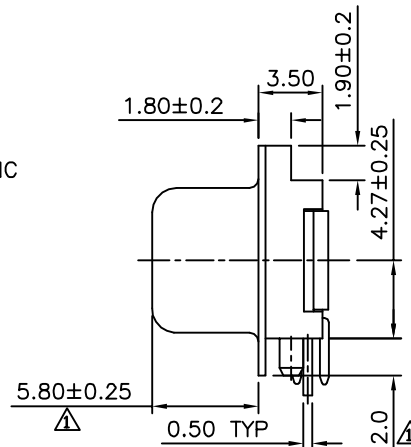
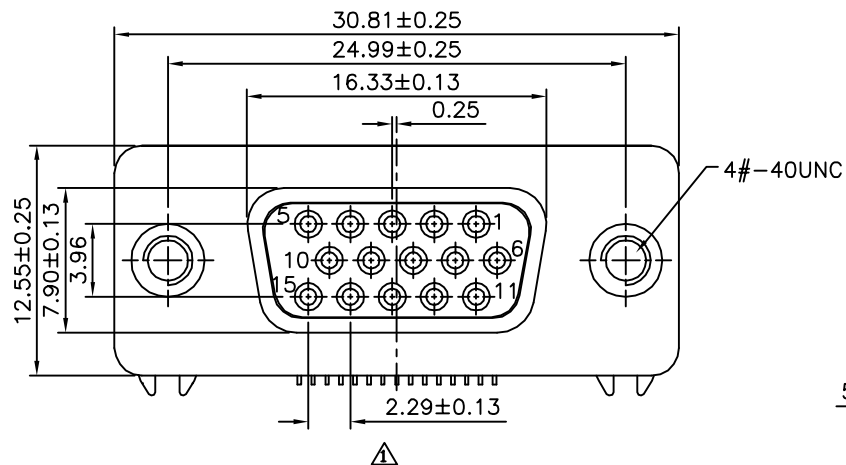


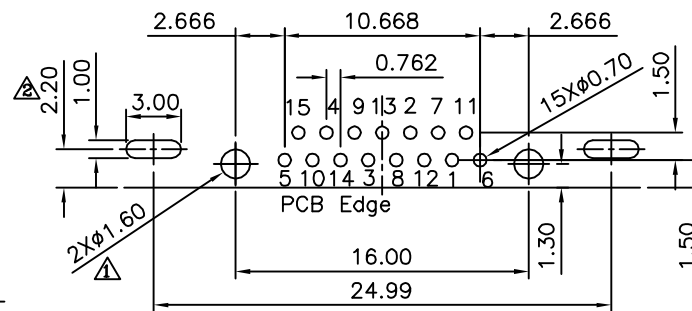

△ SPECIFICATION
 Voltage: 250V AC RMS Max.
 Current Rating: 3 Amp Per Contact
 Withstand Voltage: 500V AC RMS
 Contact Resistance: 25 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Total Mating Force: 6.0 Kgf Max.
 Total Unmating Force: 1.2 Kgf Min.
 Insulator: PBT(UL94V-0), Black
 Contact: Brass, Gold Flash On Contact Area, Bright
 Tin Plated On Solder Tails, Over Nickel
 Shell: SPCC, Nickel Plated
 Boardlock: Copper Alloy, Tin Plated
 Rivet: Copper Alloy, Nickel Plated
 RoHS Compliant

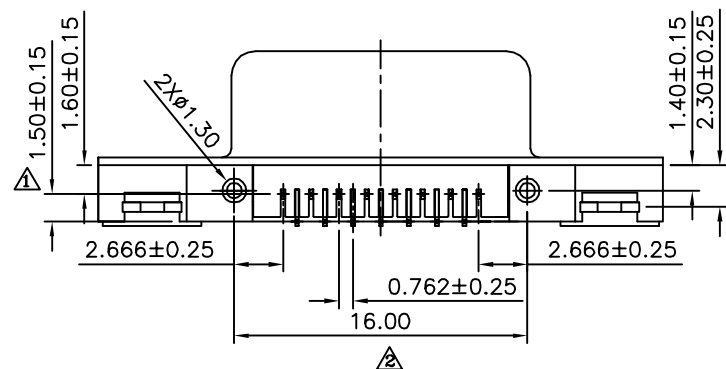

Recommended P.C.B. Layout

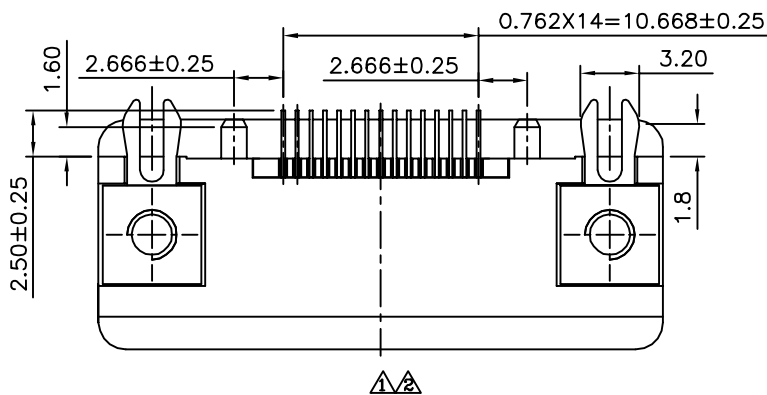

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09774

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .XX ± 0.25
 .XXX ± 0.13
 ANG. $\pm 2^{\circ}$

SCALE

NONE

REV.

A2

UNIT

mm



	A2	Modify Data	HZF	07/08/2013
	A1	Modify Data	HZF	06/24/2011
	A0	NEW RELEASE		
NO.	REV.	REVISIONS	CHK.	DATE