


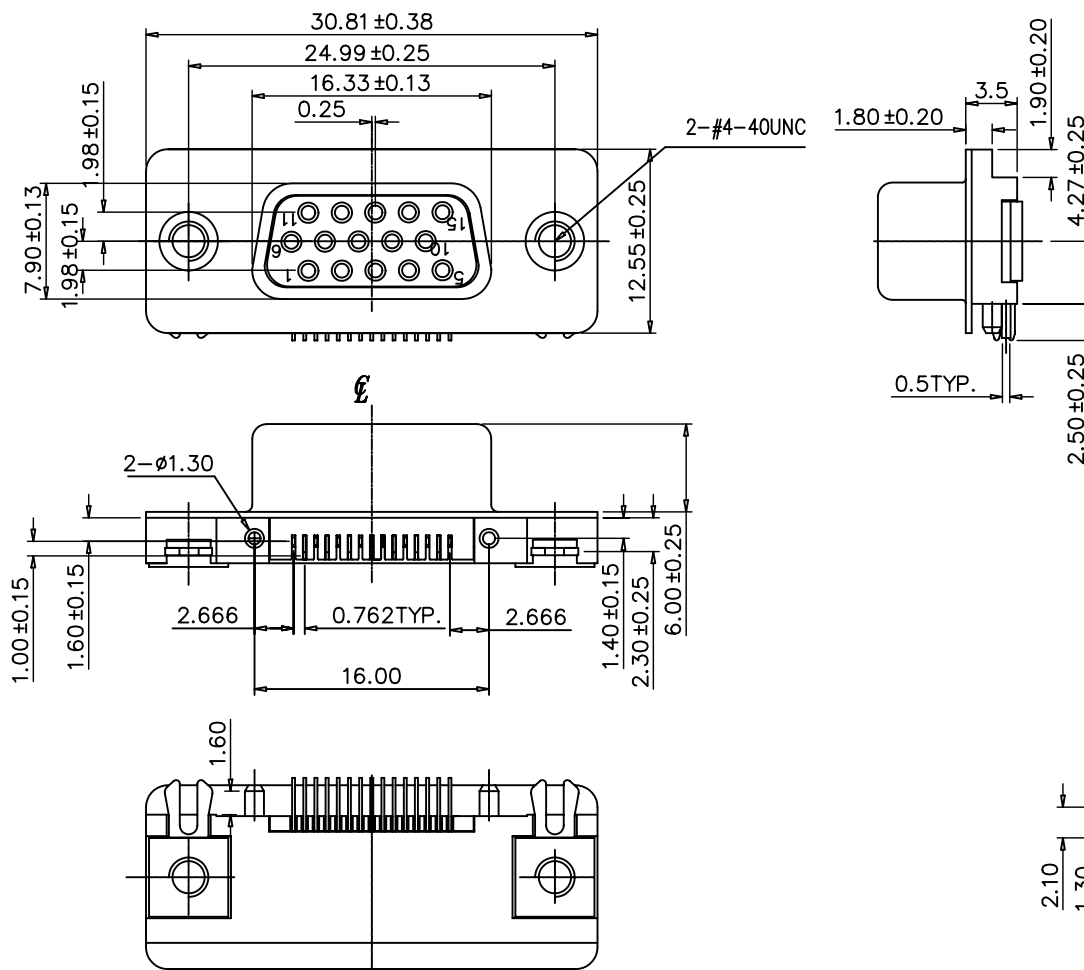

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 MΩ Minimum at DC 500V.
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to $+105^{\circ}\text{C}$.

MECHANICAL CHARACTERISTICS:


Contact Insertion Force: 341 g. Maximum.
 Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Rolled Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

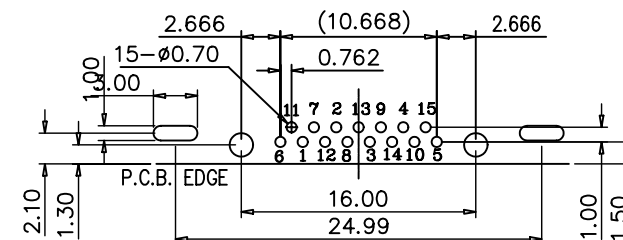

Recommend PCB Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09778

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ± 0.25
 .XX ± 0.13
 ANG. $\pm 2^{\circ}$

SCALE NONE

REV. A0

UNIT mm

AREA REVISIONS CHK DATE