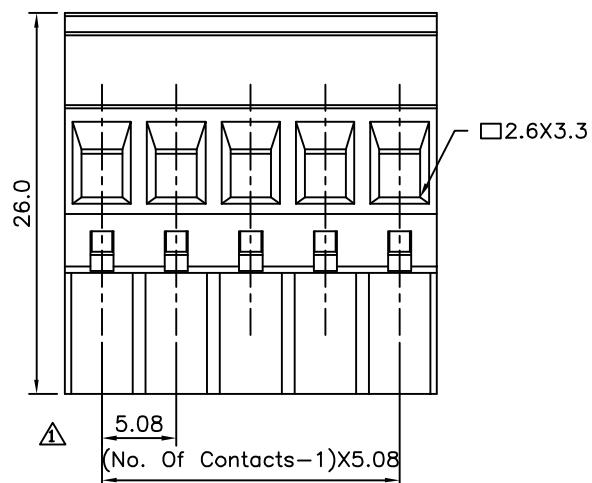
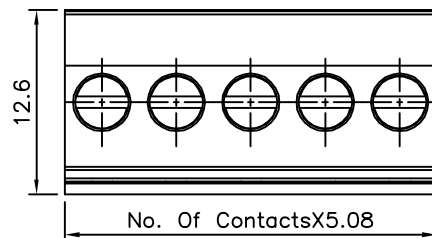


# △ SPECIFICATION

Current Rating:16 Amps/Way Max.  
Voltage Rating:300V AC  
Contact Resistance:20 Milliohms Max.  
Withstanding Voltage:2500V AC(1 Minute)  
Test Time=60 Sec/1 PCS

Wire Range:12~26 AWG  
Operation Temperature:-40°C~+105°C  
Soldering Reliability:Test Temperature=250°C±10°C/5 Seconds Max.  
Torque:5.0 Kgf.cm/M3  
Contact(Metal Housing):Copper Alloy,Nickel Plated  
Wire Guard:Copper Alloy,Tin Plated  
Terminal Screw:Steel,Galvanized With Cr3+ Plated  
Insulator Body(Housing):Polyamide(UL94V-0),Green  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

09845

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°


SCALE

NONE

REV.

A1

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

10/31/2014

△ A0

NEW RELEASE

HZF

09/26/2009