
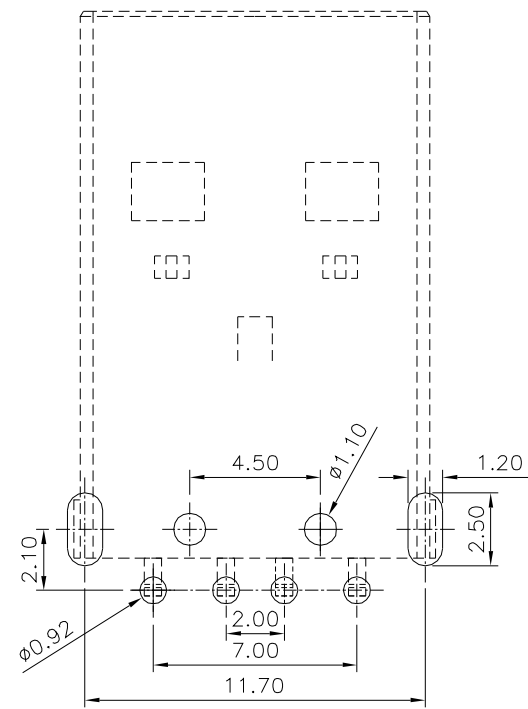


△ SPECIFICATION

△ Current Rating: 1.5A Max.
Dielectric Withstanding Voltage: 30V AC For 1 Minute
Insulation Resistance: 1000 Megaohms Min. At DC 500V
Contact Resistance: 30 Milliohms Max.
Temperature Range: -55°C ~ +105°C
RoHS Compliant

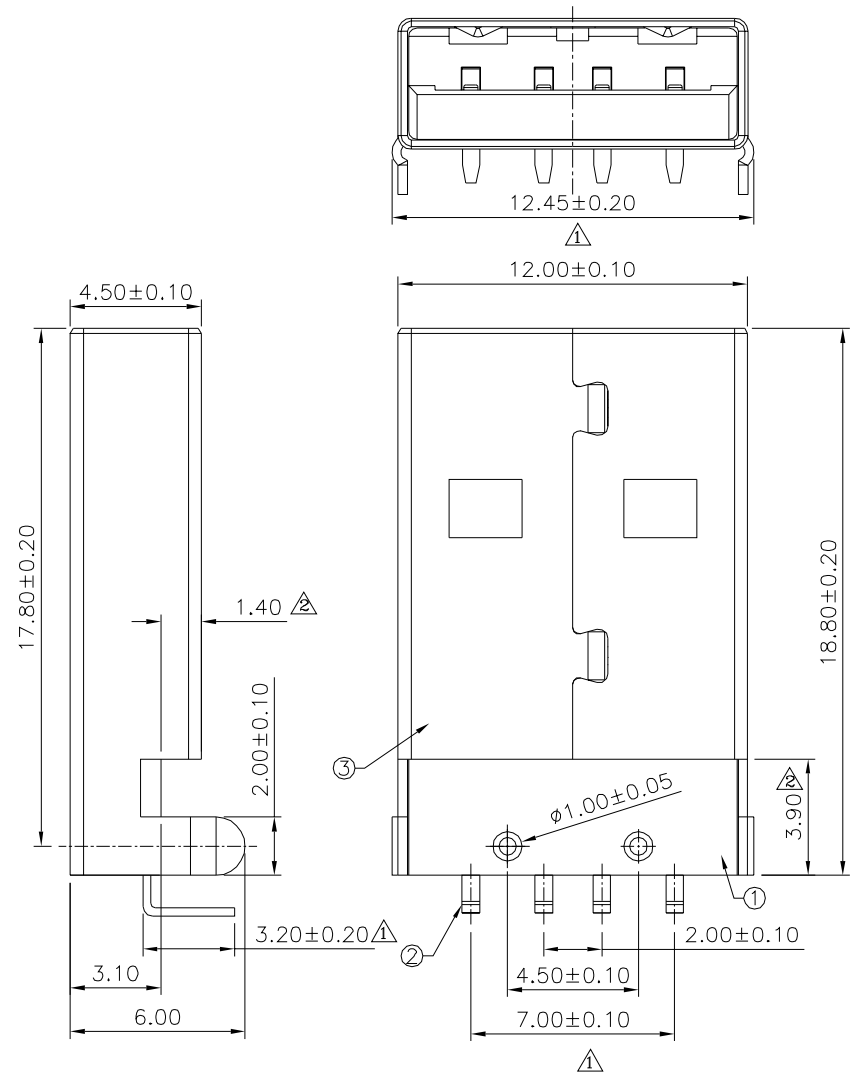

Recommended P.C.B. Layout
Tolerances: ±0.10

③ Shell	1	Cold Rolled Steel	Nickel Plated Over Copper
② Contact	4	Brass	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
① Housing	1	PBT (UL94V-0)	White
No. Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△

10018
SCALE NONE REV. B2

APPROVED BY Jason Wu
CHECKED BY Leo Han
DRAWING BY Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

△ B2	Modify Data	HZF	09/11/2025
△ B1	Modify Data	HZF	11/13/2017
△ B0	Modify Data	HZF	09/22/2010
△ B0	NEW RELEASE	HZF	09/22/2010
NO. REV.	REVISIONS	CHK	DATE