

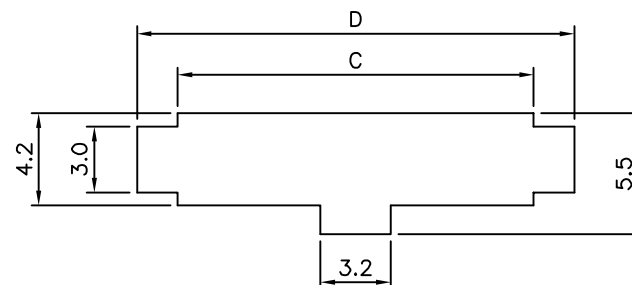
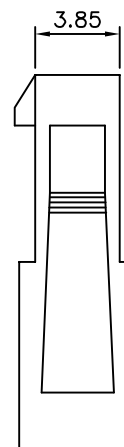


# SPECIFICATION

- General Characteristics**  
3.0mm Micro Fit 1XXX Plug
- Material&Finish**  
Insulator:Polyester UL94V-0,Black
- Electrical Characteristics**  
Current Rating:5A AC/DC  
Voltage Rating:250V AC/DC  
Withstand Voltage:1500V AC/Minute  
Insulation Resistance:1000 Megaohms Min.
- Environmental Characteristics**  
Temperature Range:-25°C~+85°C
- RoHS Compliant**

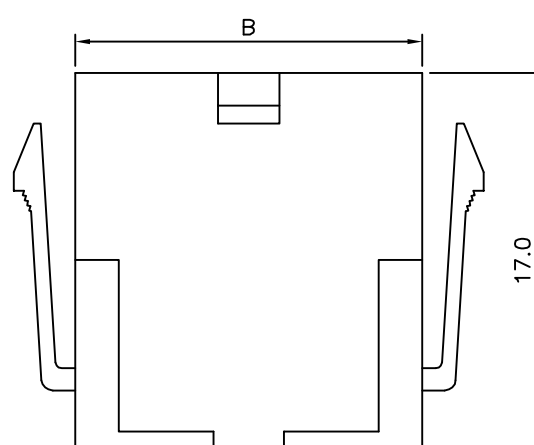

Panel Hole Dimensions

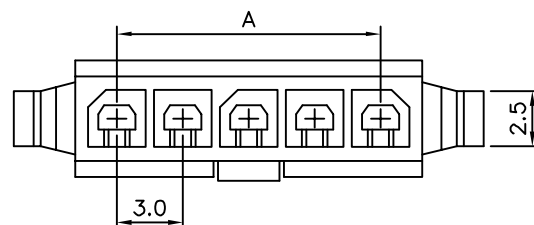

| Circuits | Dim A | Dim B | Dim C | Dim D |
|----------|-------|-------|-------|-------|
| 2        | 3.0   | 6.8   | 7.2   | 10.9  |
| 3        | 6.0   | 9.8   | 10.2  | 13.9  |
| 4        | 9.0   | 12.8  | 13.2  | 16.9  |
| 5        | 12.0  | 15.8  | 16.2  | 19.9  |
| 6        | 15.0  | 18.8  | 19.2  | 22.9  |
| 7        | 18.0  | 21.8  | 22.2  | 25.9  |
| 8        | 21.0  | 24.8  | 25.2  | 28.9  |
| 9        | 24.0  | 27.8  | 28.2  | 31.9  |
| 10       | 27.0  | 30.8  | 31.2  | 34.9  |
| 11       | 30.0  | 33.8  | 34.2  | 37.9  |
| 12       | 33.0  | 36.8  | 37.2  | 40.9  |

**4UCON**元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10140

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LXX

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

UNIT  
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

CHK

05/30/2009

DATE