





△ SPECIFICATION

Current Rating:3Amps/Contact Max.
 Contact Resistance:4 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Voltage:60V AC/DC
 Average Insertion Force With Steel Pin Of
 ø0.43mm :<250g
 Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>90g Min.
 Mechanical Life Cycle:200 Min.
 Operation Temperature:Gold Plated:-55°C~+105°C
 Tin Plated:-40°C~+105°C
 Soldering Temperature:+260°C,10s Max.
 Pin(Outer Sleeve):Brass,Machined CuZn38Pb2
 Tin Plated Over Nickel
 Clip(Contact 4 Finger):Beryllium Copper,Heat Treated
 Gold Plated Over Nickel
 Insulator(Housing):PPS UL94V-0,Black
 RoHS Compliant

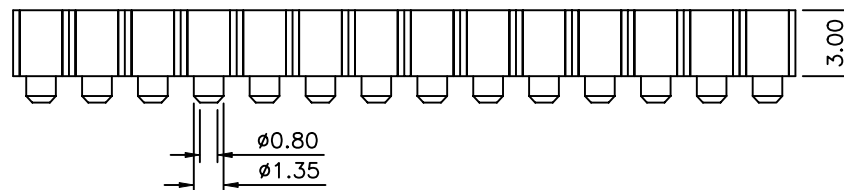

△ Recommended P.C.B. Layout

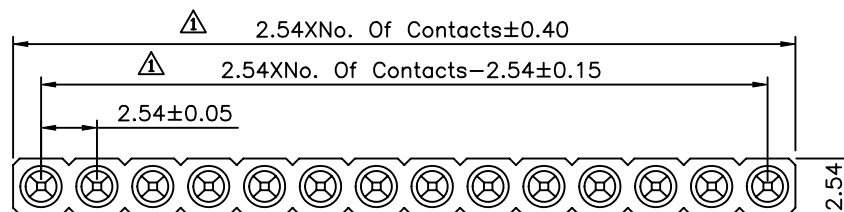

Pin Expatiate

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10295

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.35
 .X ±0.20
 .XX ±0.15
 .XXX ±0.05
 ANG. ±5°


SCALE

NONE

REV.

A1

UNIT
 mm



△ A1	Modify Data		HZF	01/14/2010	
△ A0	NEW RELEASE		HZF	06/20/2009	
NO. REV.	REVISIONS	CHK	DATE		