

SPECIFICATIONS

Current Rating:

Wire Size	#20	#22	#24	#26	#28	#30
Amp(A)	5	5	4	3	2	1

Voltage Rating:250V

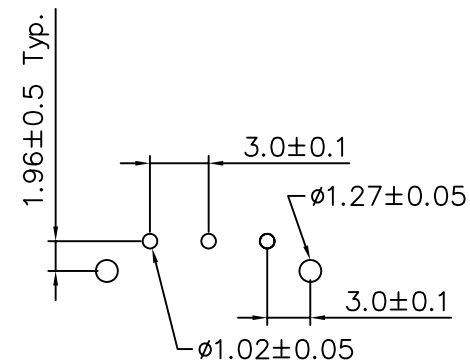
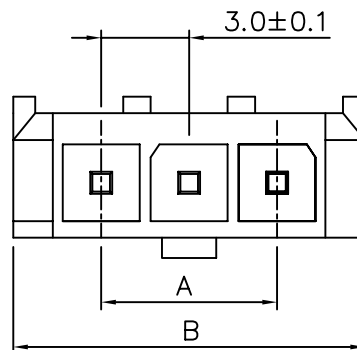
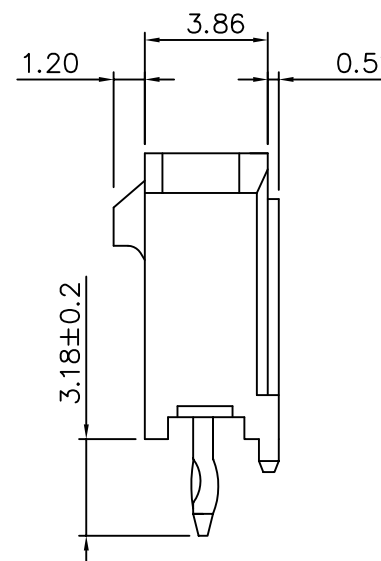
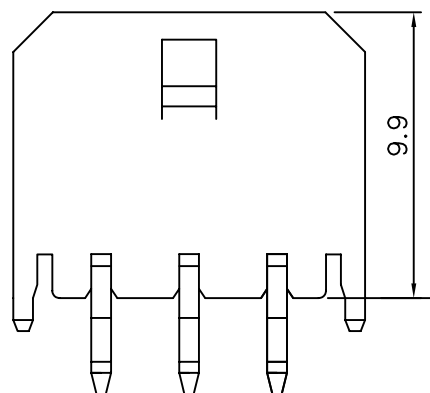
Dielectric Strength:1500V AC/Minute

Contact Resistance:10 Milliohms Max

Temperature Rise:-40°C~+105°C Δ
(Carry Rated Current Load)

Insulator:Nylon 9T ,UL 94V-0,Black

Contact:0.64SQ Pins,Brass,Tin Plated

PCB Layout: Component Side
Reconnended PCB Thickness: 1.57mm

Position	Dim A	Dim B
2	3.00	9.00
3	6.00	12.00
4	9.00	15.00
5	12.00	18.00
6	15.00	21.00
7	18.00	24.00
8	21.00	27.00
9	24.00	30.00
10	27.00	33.00
11	30.00	36.00
12	33.00	39.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10524

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15


.XXX ±0.05

SCALE

NONE

REV.

A1

UNIT
mm

NO. REV.

A1

30°C Max. → -40°C~+105°C

A0

NEW RELEASE

REVISIONS

BECKY

2004/09/02

CHK

DATE