

## SPECIFICATIONS

Current Rating:

| Wire Size | #20 | #22 | #24 | #26 | #28 | #30 |
|-----------|-----|-----|-----|-----|-----|-----|
| Amp(A)    | 5   | 5   | 4   | 3   | 2   | 1   |

Voltage Rating:250V





Dielectric Strength:1500V AC/Minute

Contact Resistance:10 Milliohms Max

Temperature Rise:-40°C~+105°C  $\Delta$   
(Carry Rated Current Load)

Insulator:Nylon 9T ,UL 94V-0,Black

Contact:0.64SQ Pins,Brass,Tin Plated

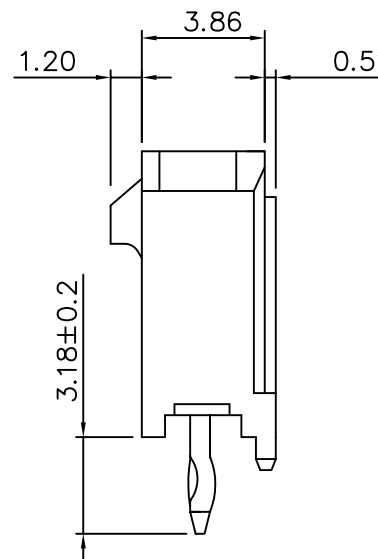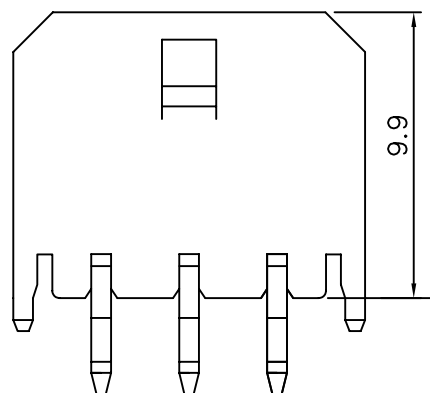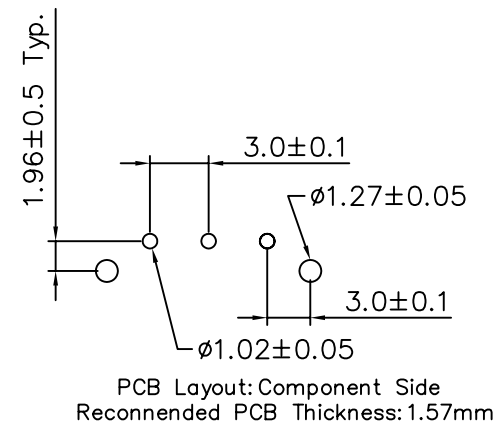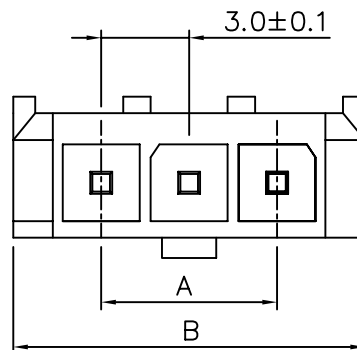

| Position | Dim A | Dim B |
|----------|-------|-------|
| 2        | 3.00  | 9.00  |
| 3        | 6.00  | 12.00 |
| 4        | 9.00  | 15.00 |
| 5        | 12.00 | 18.00 |
| 6        | 15.00 | 21.00 |
| 7        | 18.00 | 24.00 |
| 8        | 21.00 | 27.00 |
| 9        | 24.00 | 30.00 |
| 10       | 27.00 | 33.00 |
| 11       | 30.00 | 36.00 |
| 12       | 33.00 | 39.00 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10534

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.25

.XX ±0.15

.XXX ±0.05

UNIT  
mm

1 A1

30°C Max. → -40°C~+105°C

BECKY 2004/09/02

0 A0

NEW RELEASE

MEI

NO. REV.

REVISIONS

CHK

DATE