
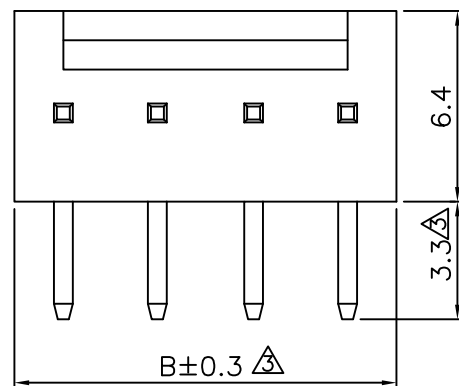
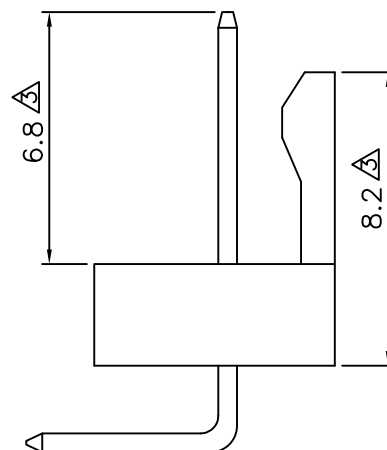


P.C.Board Hole Dimensions

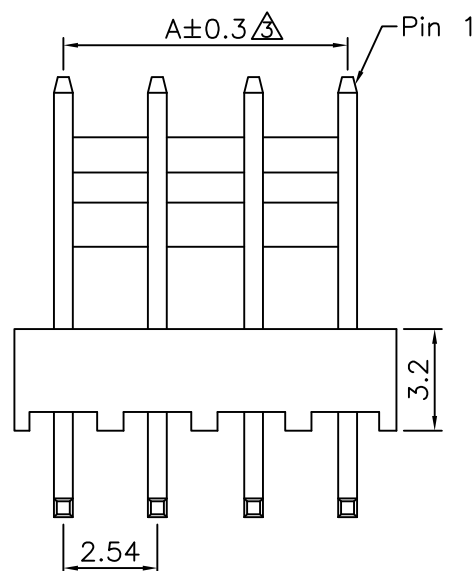

SPECIFICATIONS
△ Current Rating: 3A AC, DC
Voltage Rating: 250V AC, DC
Withstanding Voltage: 1500V AC/Minute
Ambient Temperature Range: -40°C To +105°C
Features: 2~20 Circuits Available
Insulator: Nylon 66, UL94V-0
Pin: Brass, Tin Plated
Standard Color: Brown

Circuits	Dimensions	
	A	B
2P	2.54	5.08
3P	5.08	7.62
4P	7.62	10.16
5P	10.16	12.70
6P	12.70	15.24
7P	15.24	17.78
8P	17.78	20.32
9P	20.32	22.86
10P	22.86	25.40
11P	25.40	27.94
12P	27.94	30.48
13P	30.48	33.02
14P	33.02	35.56
15P	35.56	38.10
16P	38.10	40.64
17P	40.64	43.18
18P	43.18	45.72
19P	45.72	48.26
20P	48.26	50.80

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10587

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

SCALE

NONE

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15

.XXX ±0.05

UNIT
mm

NO.	REV.
△ A2	Modify Dim
△ A2	Update Specifications
△ A1	Modify Dim. 29.7 → 27.94
△ A0	NEW RELEASE

NO.	REV.	REVISIONS
△ A2	Modify Dim	
△ A2	Update Specifications	
△ A1	Modify Dim. 29.7 → 27.94	
△ A0	NEW RELEASE	

CHK	DATE
HZF	09/24/2007
HZF	09/24/2007
MEI	2004/04/23
BECKY	2004/02/26