
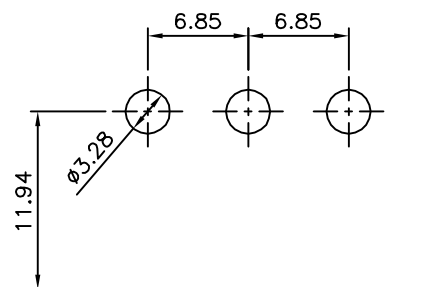
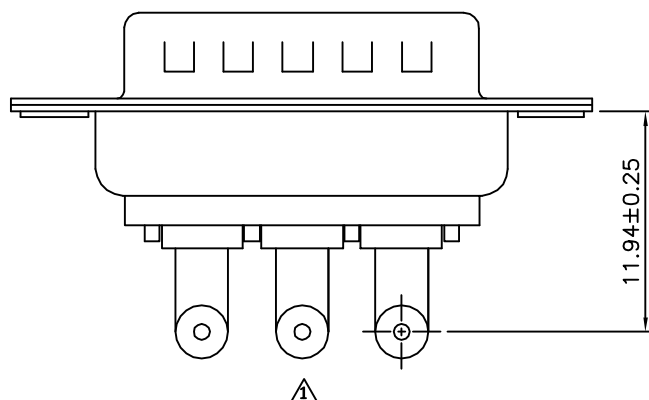



△ SPECIFICATION

Power Contact Current Rating:20 Amp
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V-0)
 Signal Contact:Brass,Gold Flash Over Nickel
 Power Contact:Brass,Gold Flash Over Nickel
 Metal Shell:Steel,Tin Plated
 RoHS Compliant

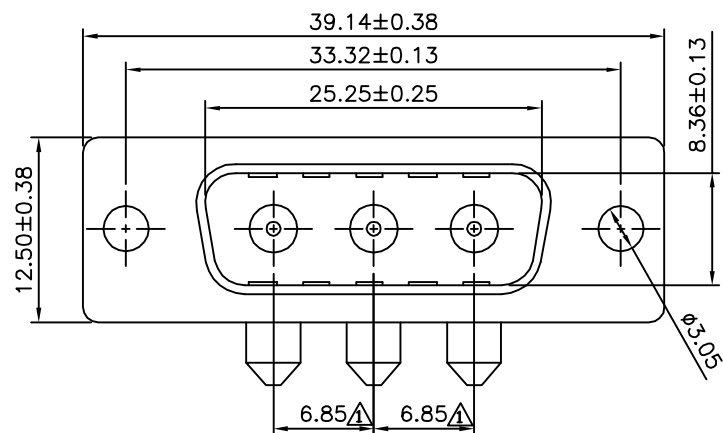

△ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10637

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.3

.XX ±0.3

ANG. ±2°

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1 Modify Data HZF 02/18/2013

△ A0 NEW RELEASE