

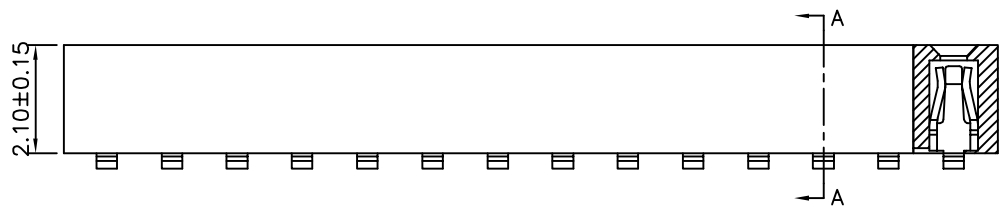


Recommended P.C.B Layout (Top Side)
(PCB Board Tolerance: ±0.05)

△ SPECIFICATION
 Current Rating: 1.0 Amp
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Phosphor Bronze, Gold Plated Over Nickel
 Insulator: PA9T+30%G.F.(UL94V-0), Black
 RoHS Compliant

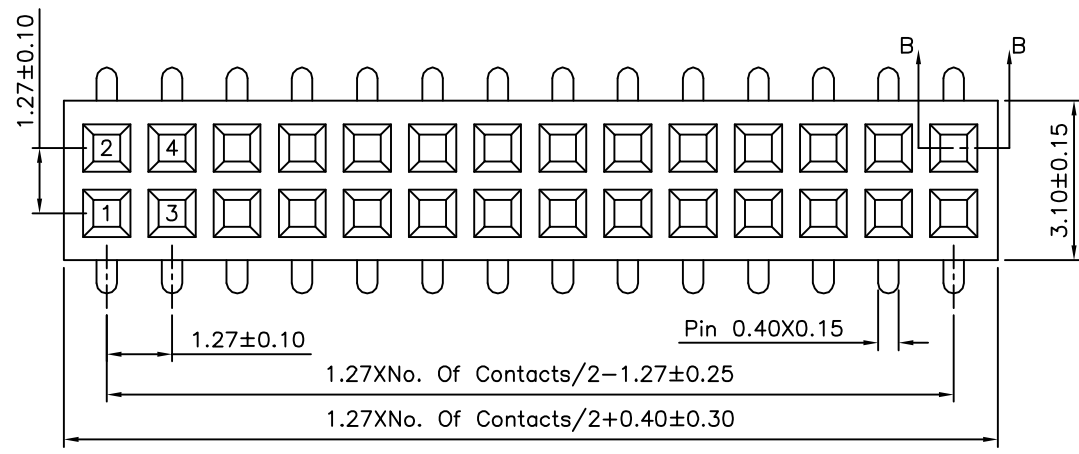

Section B-B



Section A-A

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3° |
| 10802 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | UNIT mm |
| | | DRAWING BY | | |
| | | YBL | | NO. REV. |
| SCALE | NONE | REV. | A4 | |
| | | | | CHK |
| | | | | DATE |

| | | | |
|------|--------------|-------|------------|
| △ A4 | Modify Data | HZF | 11/11/2013 |
| △ A3 | Modify Spec. | HZF | 02/26/2013 |
| △ A2 | Add P/N Code | HZF | 07/17/2012 |
| △ A1 | Modify Data | HZF | 03/18/2010 |
| △ A0 | NEW RELEASE | BECKY | 03/25/2005 |