



Recommended P.C.B Layout (Top Side)  
(PCB Board Tolerance: ±0.05)


**△ SPECIFICATION**  
 Current Rating: 1.0 Amp  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Contact: Phosphor Bronze, Gold Plated Over Nickel  
 Insulator: PA9T+30%G.F.(UL94V-0), Black  
 RoHS Compliant

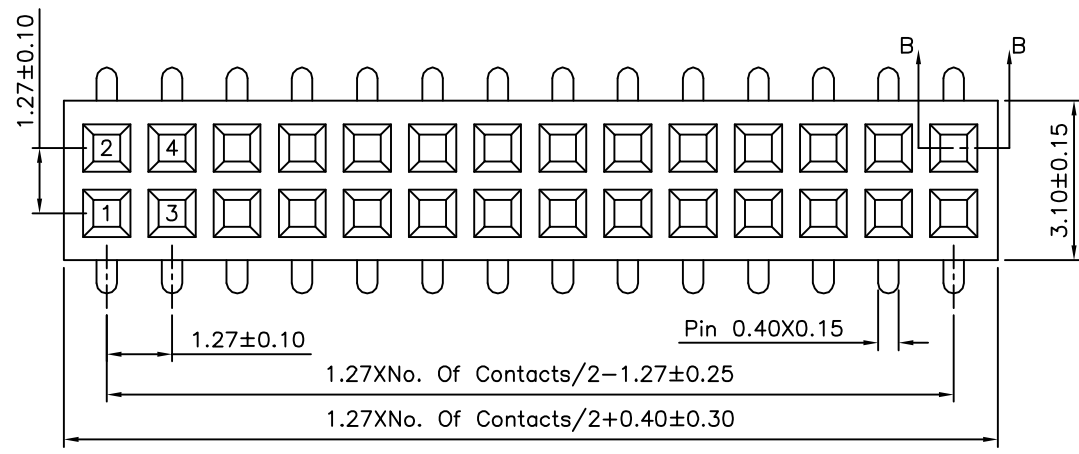

△

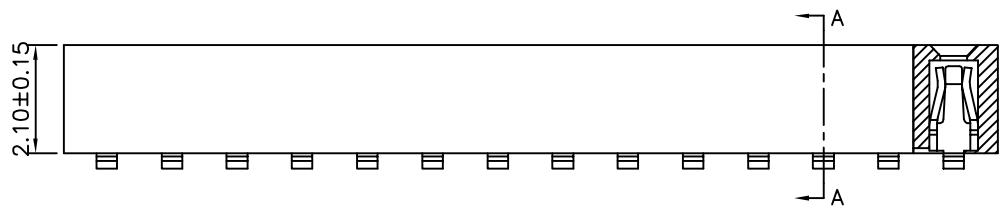

Section B-B



△ Section A-A

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.40 △ .XX ±0.25 △ .XXX ±0.15 △ ANG. ±3°
10808		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		YBL		
SCALE	NONE	REV.	A4	UNIT
				mm

△ A4	Modify Data	HZF	11/11/2013
△ A3	Modify Spec.	HZF	02/26/2013
△ A2	Add P/N Code	HZF	07/17/2012
△ A1	Modify Data	HZF	03/18/2010
△ A0	NEW RELEASE	BECKY	03/25/2005
NO. REV.	REVISIONS	CHK	DATE