


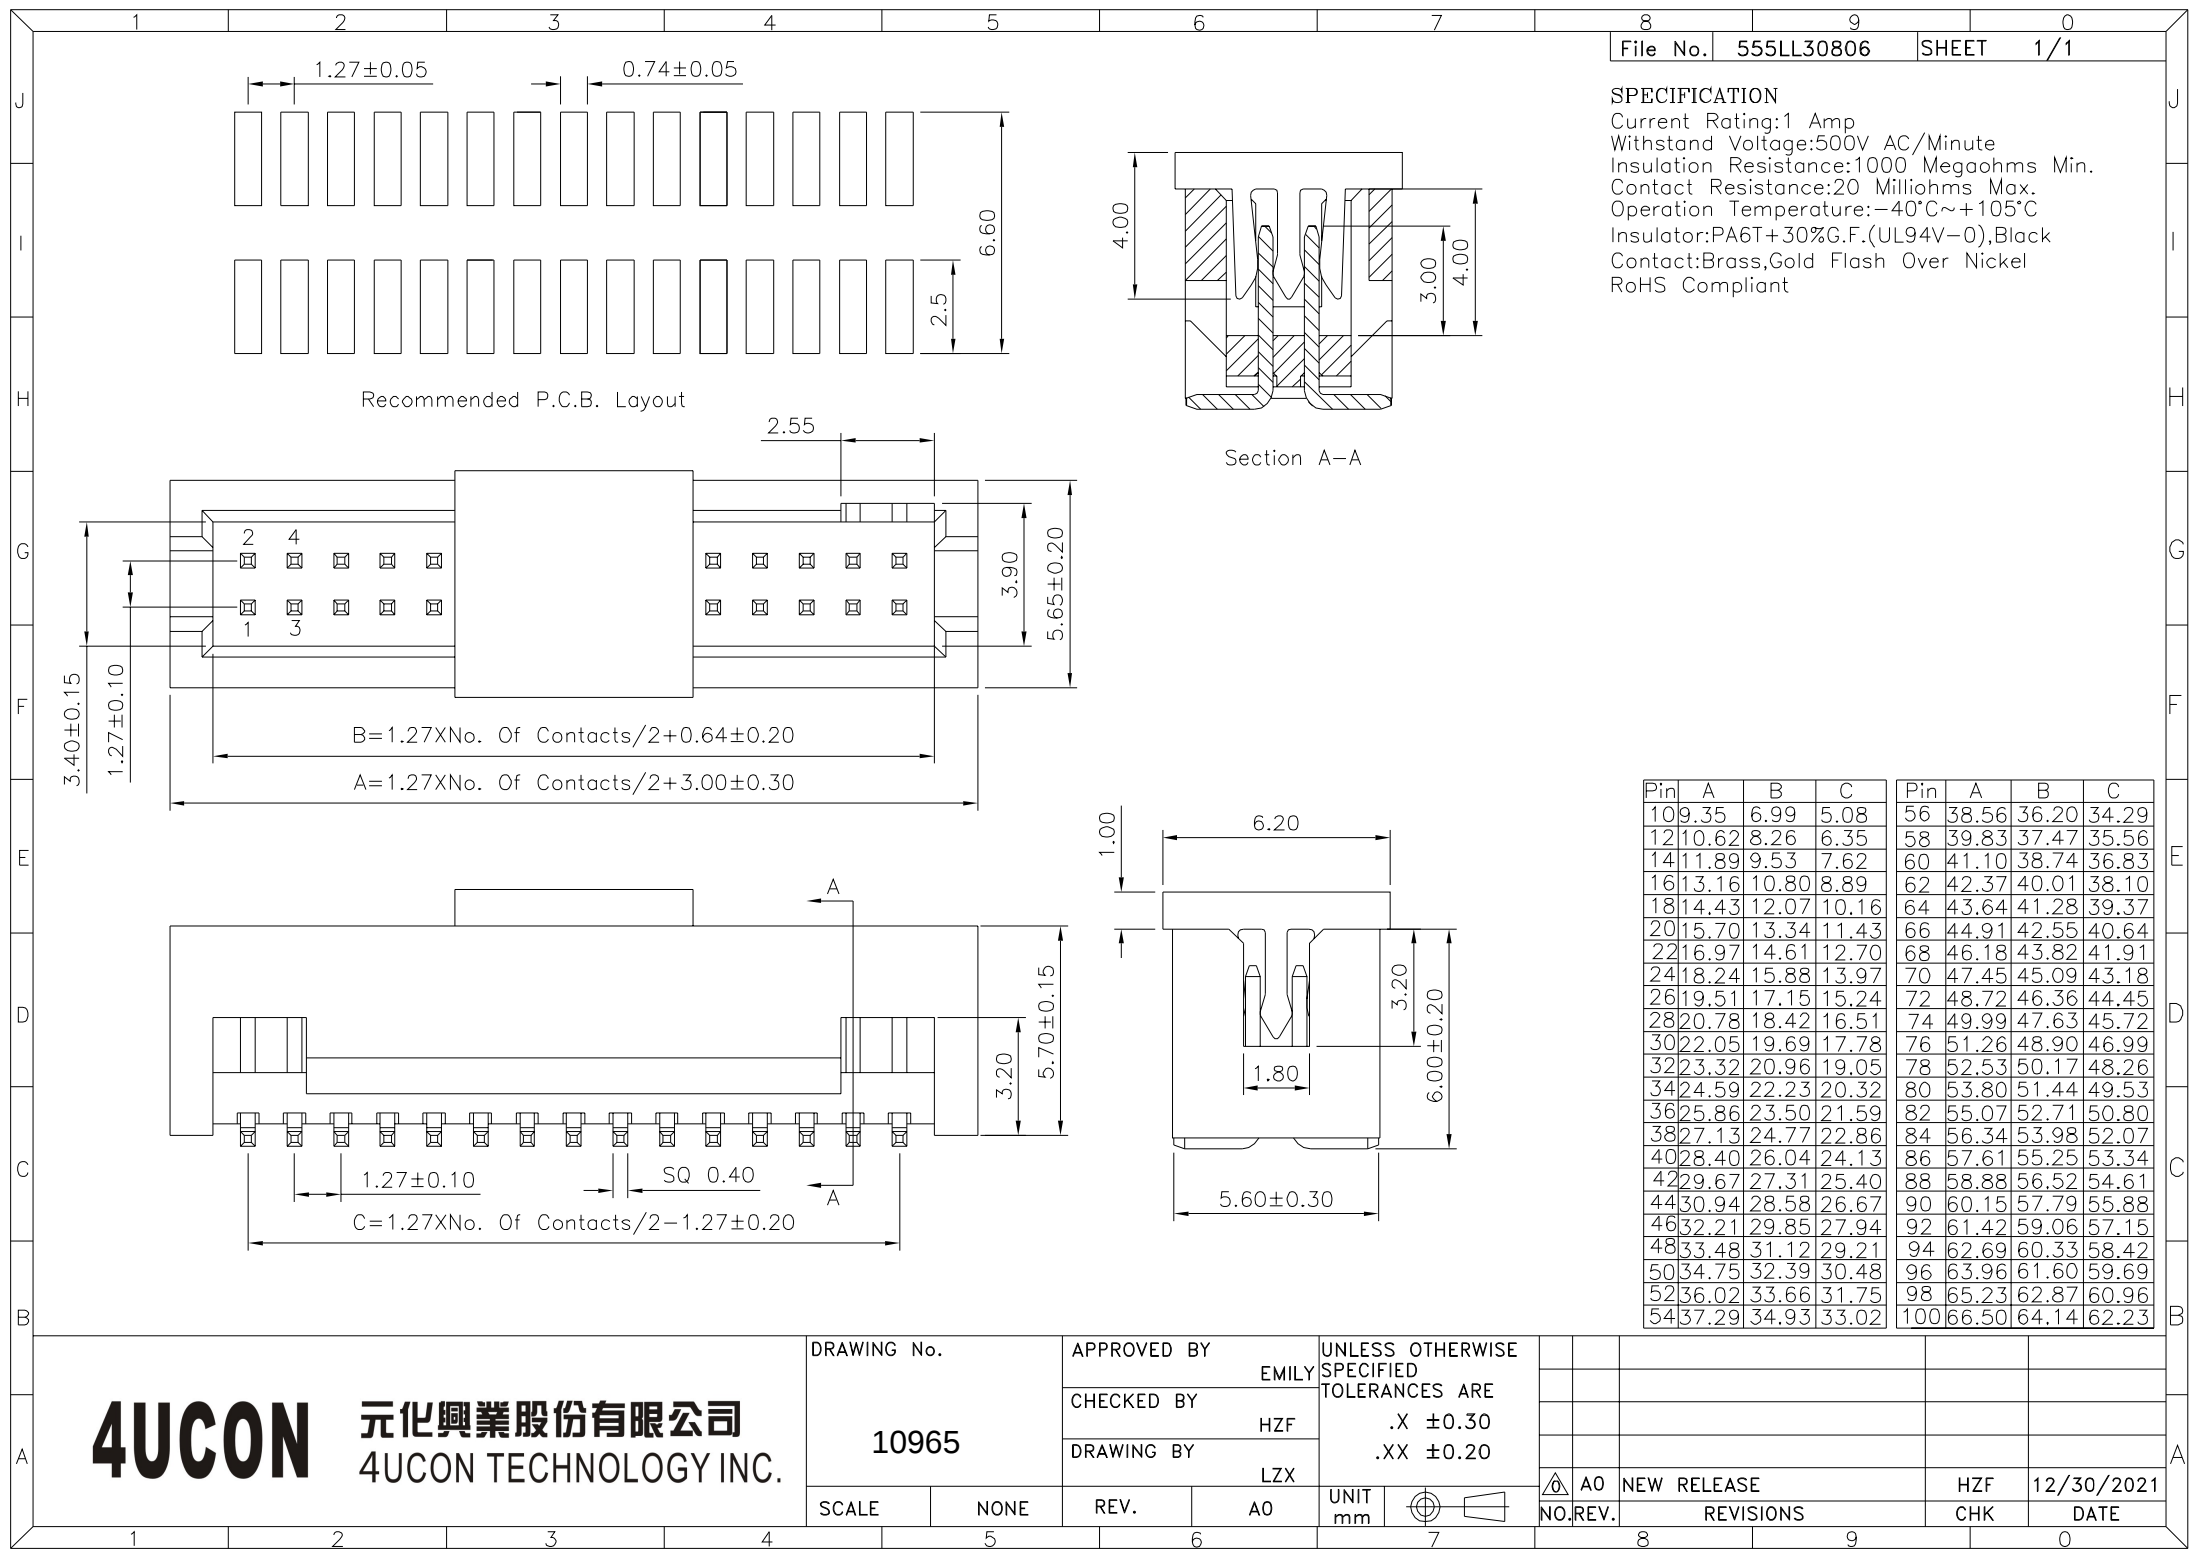

SPECIFICATION
Current Rating:1 Amp
Withstand Voltage:500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Pin	A	B	C	Pin	A	B	C
10	9.35	6.99	5.08	56	38.56	36.20	34.29
12	10.62	8.26	6.35	58	39.83	37.47	35.56
14	11.89	9.53	7.62	60	41.10	38.74	36.83
16	13.16	10.80	8.89	62	42.37	40.01	38.10
18	14.43	12.07	10.16	64	43.64	41.28	39.37
20	15.70	13.34	11.43	66	44.91	42.55	40.64
22	16.97	14.61	12.70	68	46.18	43.82	41.91
24	18.24	15.88	13.97	70	47.45	45.09	43.18
26	19.51	17.15	15.24	72	48.72	46.36	44.45
28	20.78	18.42	16.51	74	49.99	47.63	45.72
30	22.05	19.69	17.78	76	51.26	48.90	46.99
32	23.32	20.96	19.05	78	52.53	50.17	48.26
34	24.59	22.23	20.32	80	53.80	51.44	49.53
36	25.86	23.50	21.59	82	55.07	52.71	50.80
38	27.13	24.77	22.86	84	56.34	53.98	52.07
40	28.40	26.04	24.13	86	57.61	55.25	53.34
42	29.67	27.31	25.40	88	58.88	56.52	54.61
44	30.94	28.58	26.67	90	60.15	57.79	55.88
46	32.21	29.85	27.94	92	61.42	59.06	57.15
48	33.48	31.12	29.21	94	62.69	60.33	58.42
50	34.75	32.39	30.48	96	63.96	61.60	59.69
52	36.02	33.66	31.75	98	65.23	62.87	60.96
54	37.29	34.93	33.02	100	66.50	64.14	62.23

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
10965		HZF	
		DRAWING BY	
		LZX	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20

UNIT mm

△	A0	NEW RELEASE	HZF	12/30/2021
NO.	REV.	REVISIONS	CHK	DATE