
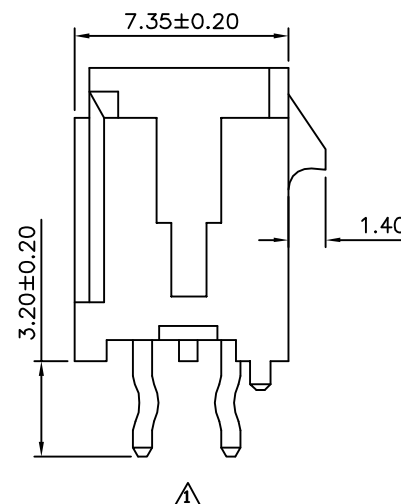
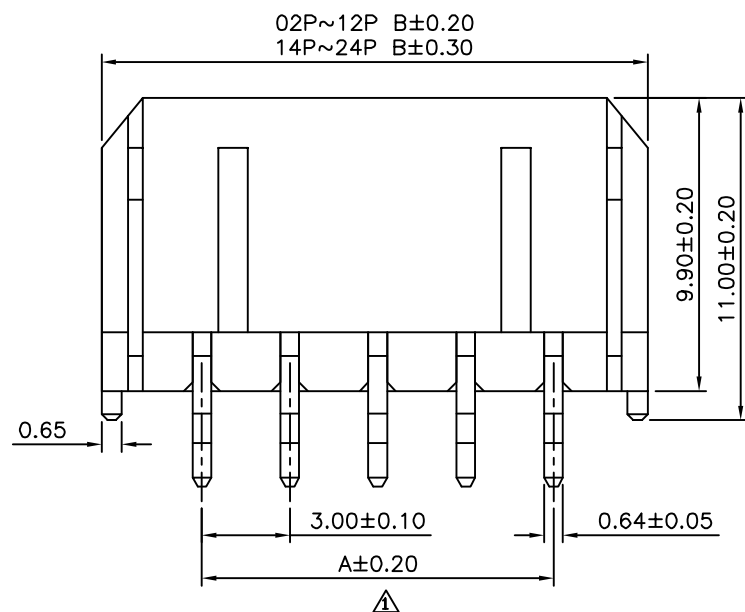
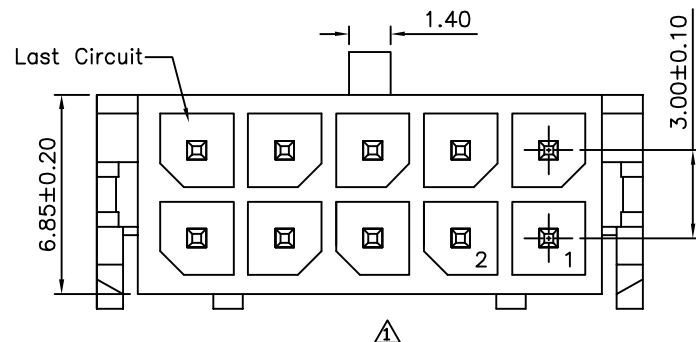


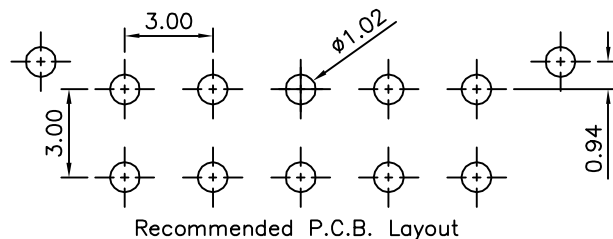

SPECIFICATION

1. General Characteristics
 - 3.0mm Micro-Fit Wafer 2XXX DIP 180°
 - With Post Black Insulator Tin Plated
2. Material&Finish
 - Housing: PA66+15%G.F.(UL94V-0), Black
 - Pin: Brass, Tin Plated
3. Electrical Characteristics
 - Current Rating: 5A AC, DC
 - Voltage Rating: 250V AC, DC
 - Contact Resistance: 10 Milliohms Max.
 - Insulation Resistance: 1000 Megaohms Min.
 - Withstand Voltage: 1500V AC/Minute
4. Environmental Characteristics
 - Temperature Range: -25°C~+85°C
5. RoHS Compliant

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10983

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm



NO. REV.

A1 Modify Data

A0

NEW RELEASE


REVISIONS

CHK

DATE

HZF 11/28/2014

HZF 06/22/2012

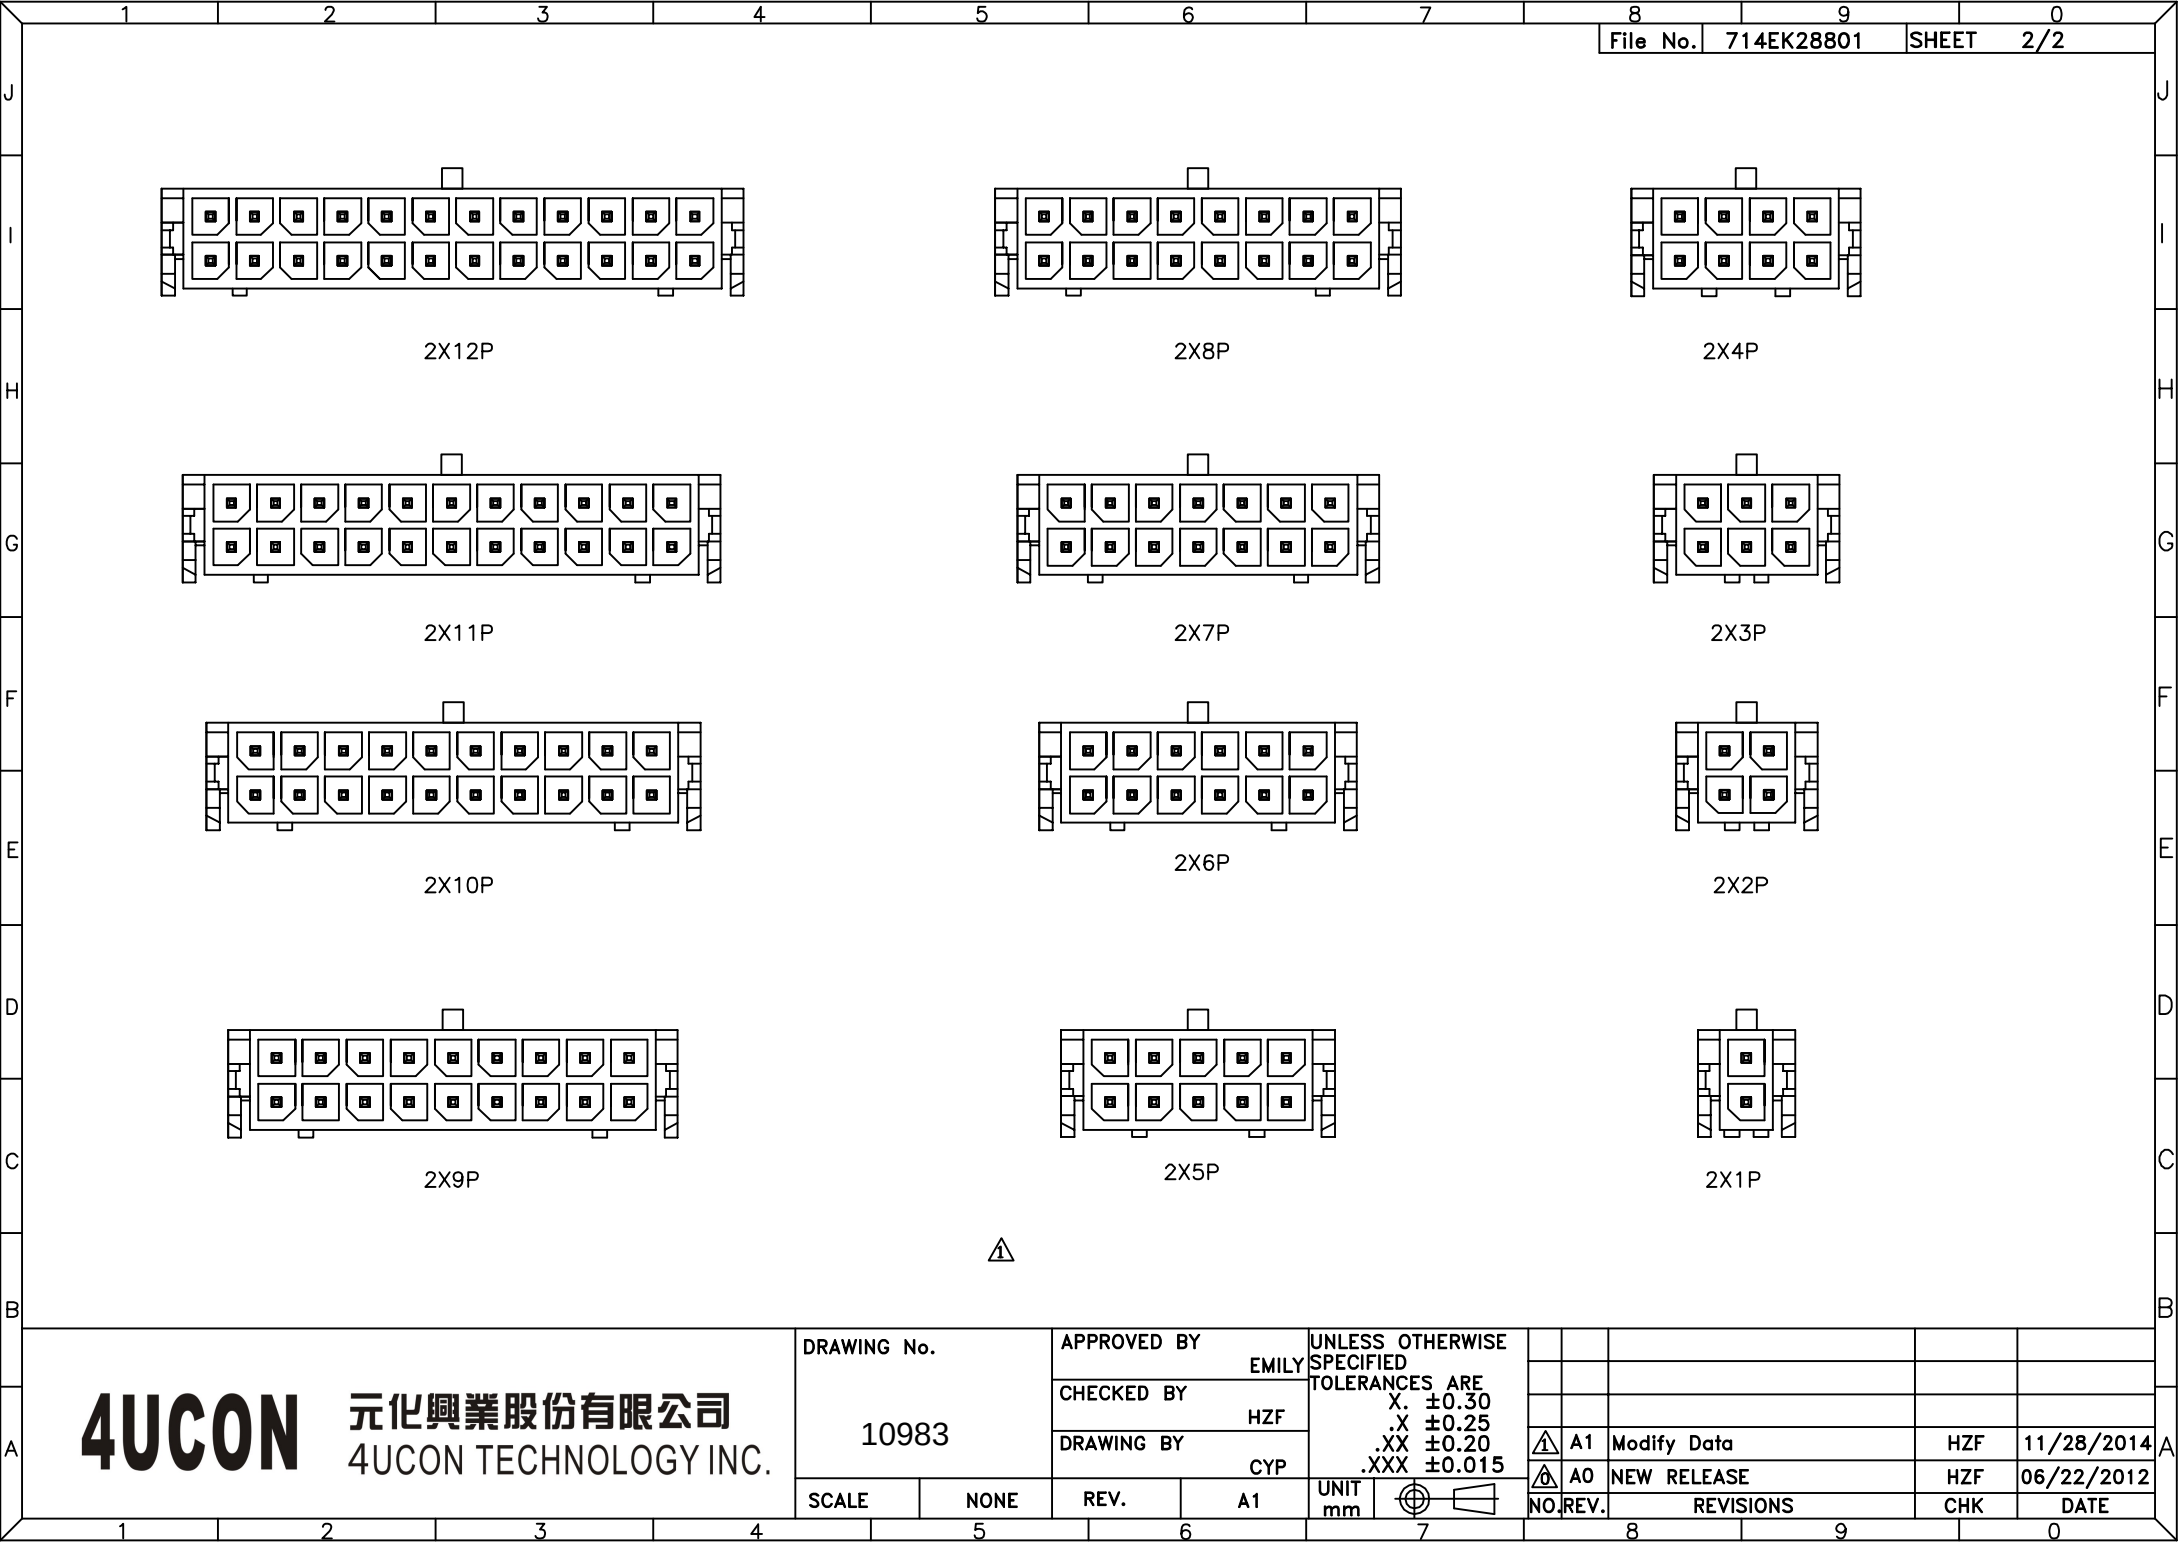


4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 10983		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.30
.X ± 0.25
.XX ± 0.20
.XXX ± 0.015

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	11/28/2014
△	A0	NEW RELEASE	HZF	06/22/2012