

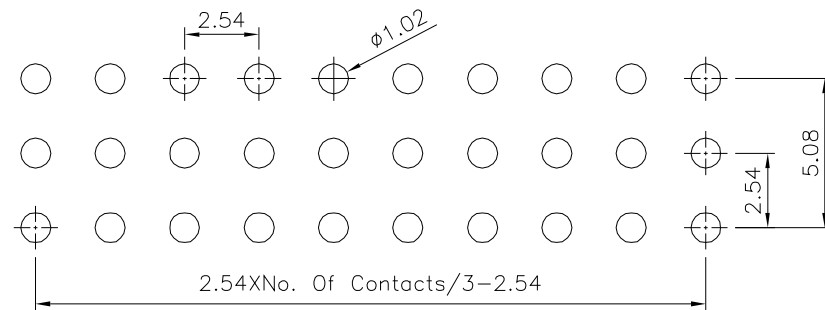
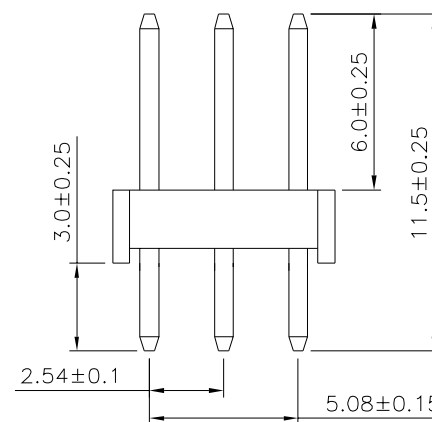


SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

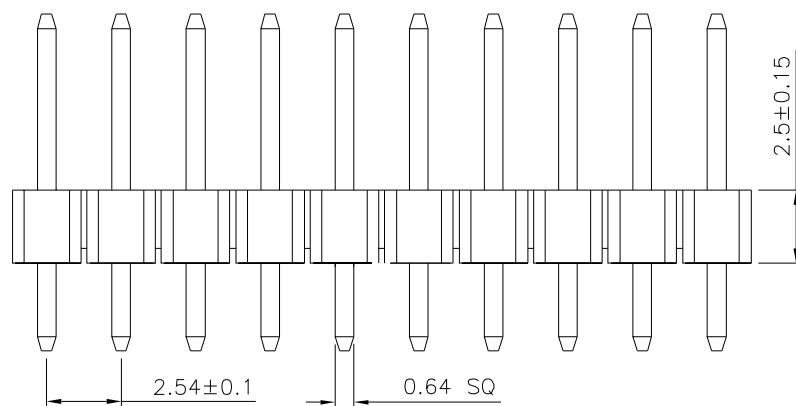

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

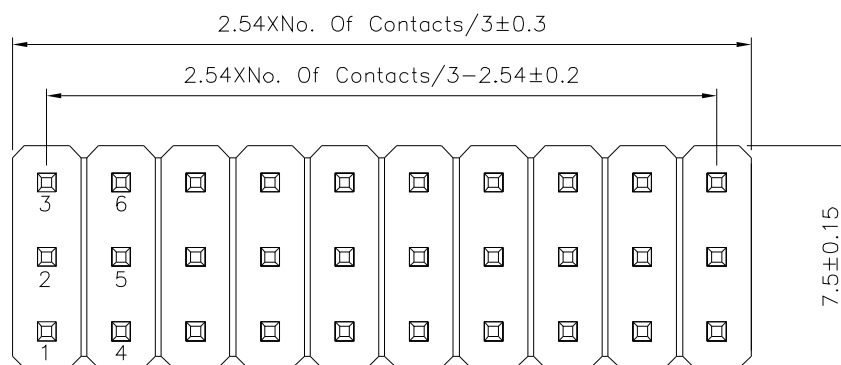

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11266

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X. ±2°
.X ±0.20 .X ±1.5°
.XX ±0.15 .XX ±1°
.XXX ±0.10 .XXX ±0.5°

UNIT

mm

NO. REV.

REVISIONS

△ A0

NEW RELEASE

CHK

DATE

HZF

08/09/2014