
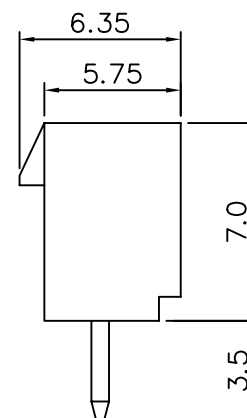
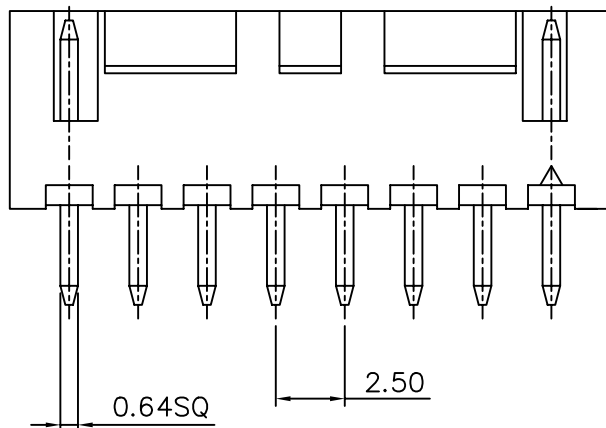
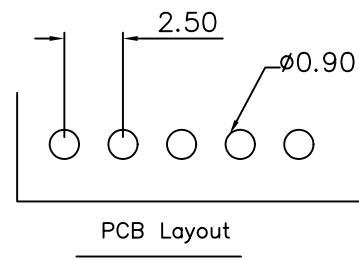


SPECIFICATIONS

Insulator:Nylon 66,UL 94V-0
 Or PBT UL 94V-0
 Contact:Brass,Tin Plated

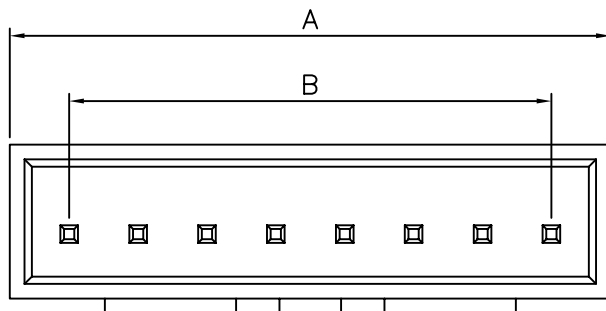

Poles	A	B	Q'TY/Bag
2	7.48	2.50	1000
3	9.98	5.00	1000
4	12.48	7.50	1000
5	14.98	10.00	1000
6	17.48	12.50	1000
7	19.98	15.00	500
8	22.48	17.50	500
9	24.98	20.00	500
10	27.48	22.50	500
11	29.98	25.00	500
12	32.48	27.50	500
13	34.98	30.00	500
14	37.48	32.50	500
15	39.98	35.00	500

4UCON元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
11304

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE

REV. A0

UNIT mm

NO. REV.

A0 NEW RELEASE
 REVISIONS

MEI
 CHK DATE