
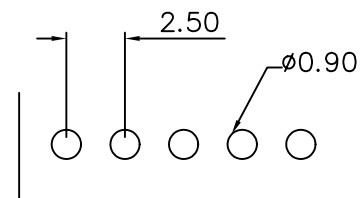


SPECIFICATIONS



Insulator: Nylon 66, UL 94V-0

Or PBT UL 94V-0

Contact: Brass, Tin Plated

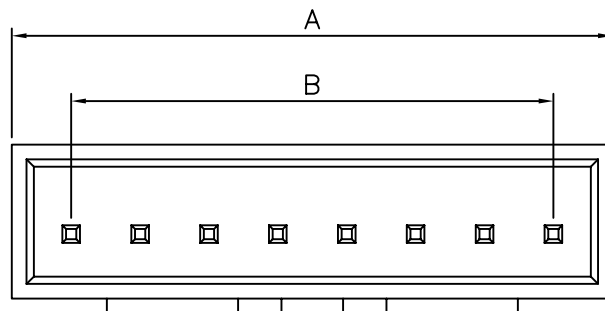

PCB Layout

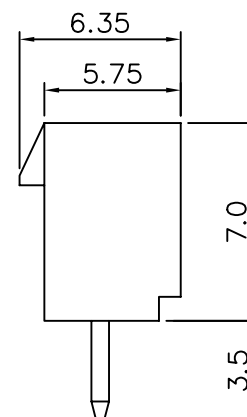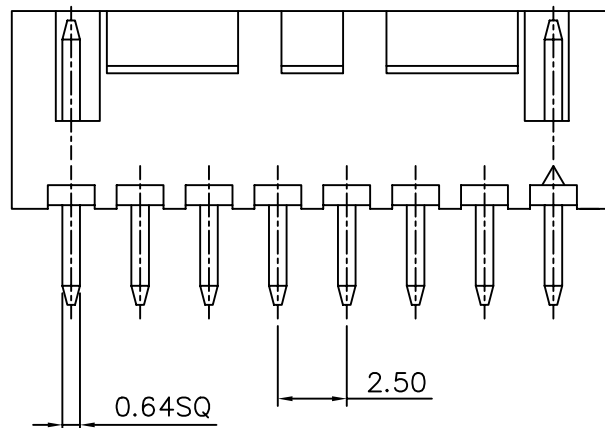

Poles	A	B	Q'TY/Bag
2	7.48	2.50	1000
3	9.98	5.00	1000
4	12.48	7.50	1000
5	14.98	10.00	1000
6	17.48	12.50	1000
7	19.98	15.00	500
8	22.48	17.50	500
9	24.98	20.00	500
10	27.48	22.50	500
11	29.98	25.00	500
12	32.48	27.50	500
13	34.98	30.00	500
14	37.48	32.50	500
15	39.98	35.00	500

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11305

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

0

A0

NEW RELEASE

REVISIONS

MEI

CHK

DATE