
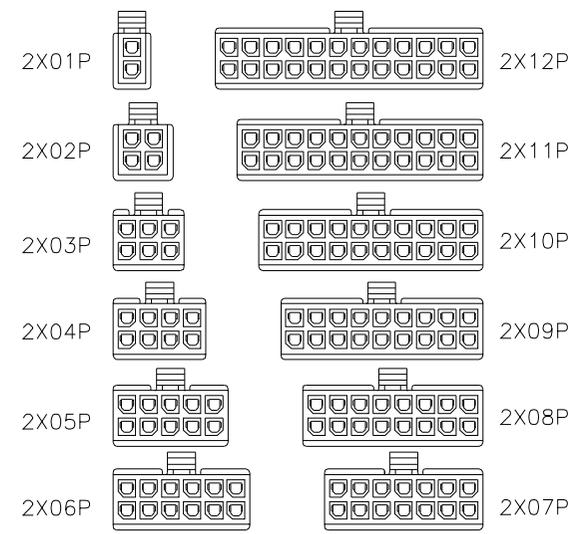
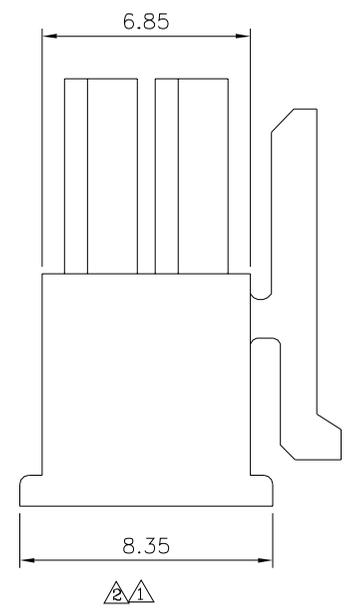
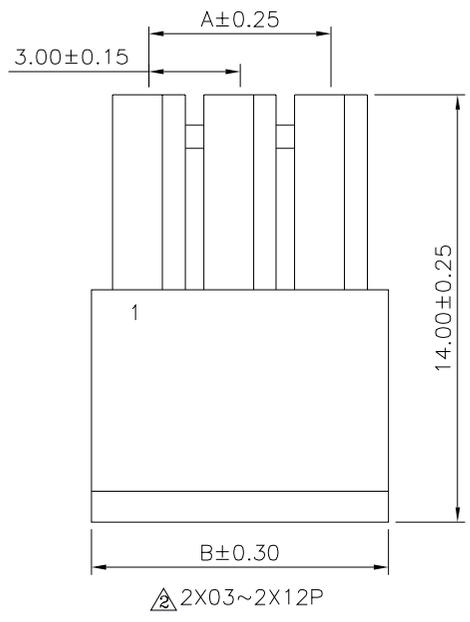
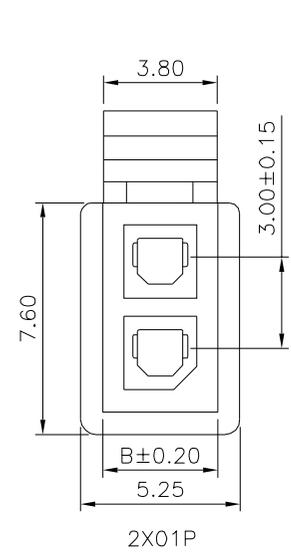
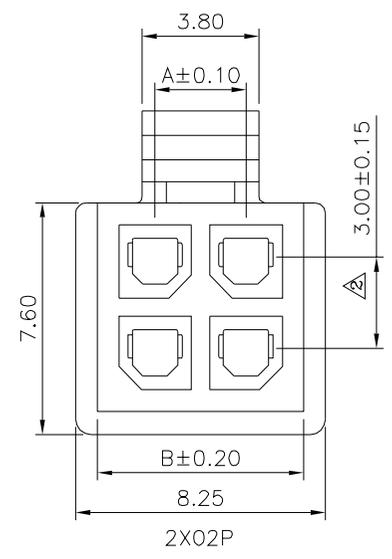


△ SPECIFICATION

- 1. Material&Finish  
Insulator:PA66(UL94V-2),Black
- 2. Electrical Characteristics  
Current Rating:5A AC/DC  
Voltage Rating:250V AC/DC  
Withstanding Voltage:1500V AC/Minute  
Insulation Resistance:1000 Megaohms Min.
- 3. Environmental Characteristics  
Temperature Range:-25°C~+85°C
- 4. RoHS Compliant

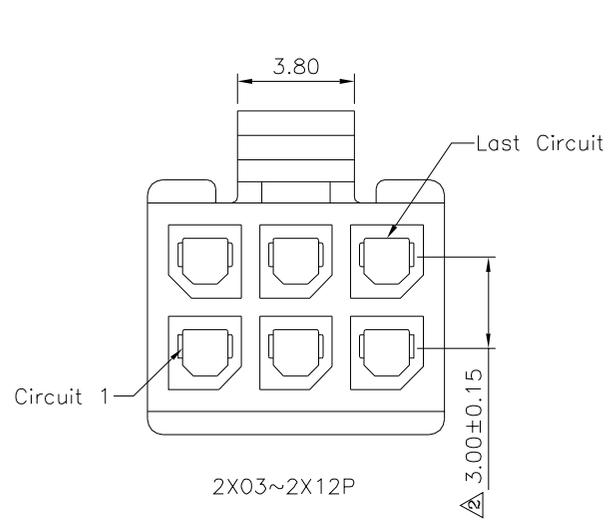

Pin	A	B
02	3.00	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°
11408		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	B2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	B2	Modify Data	HZF	09/27/2023
△1	B1	Modify Data	HZF	09/24/2019
△0	B0	NEW RELEASE	HZF	02/17/2016