

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:1 Amp

Withstand Voltage:500V AC/DC

Contact Resistance: 20 Milliohms Max.




Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Plated Over Nickel

Insulator:PA6T+30%G.F.(UL94V-0),Black

RoHS Compliant

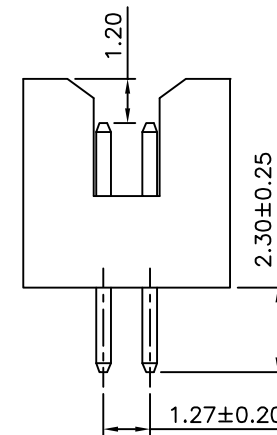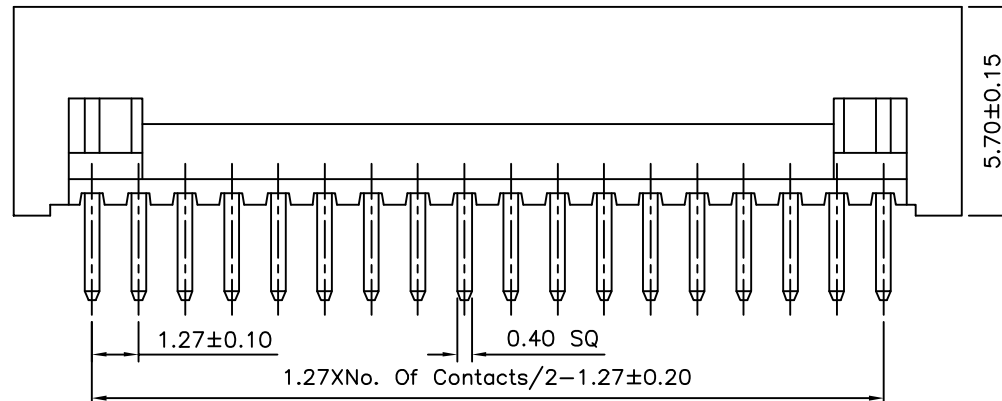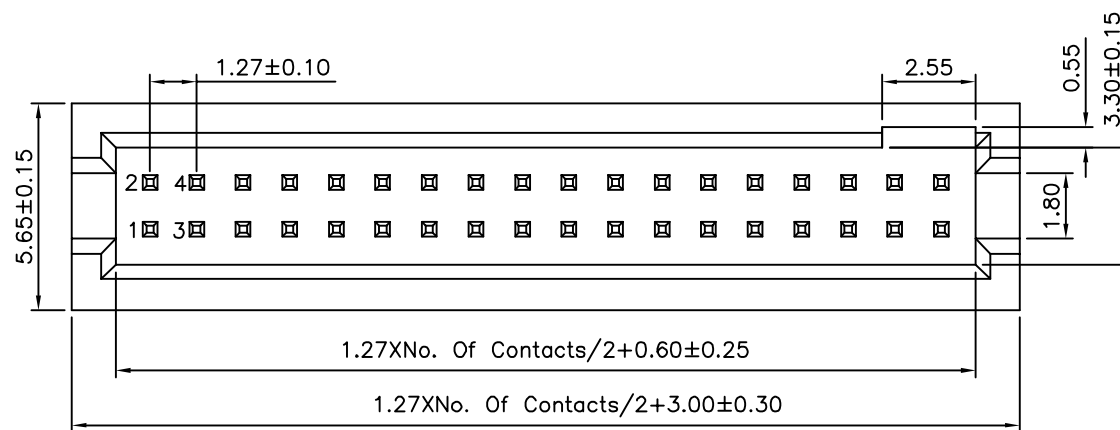

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12210

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

DRAWING BY

SONG

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

.X ±0.40

XX	±0.25
----	-------

.XXX ±0.15
ANOVA 1.3%

ANG. $\pm 3^\circ$	
UNIT mm	

	AO
NO. REV.	

NEW RELEASE

REVISIONS

HZF

05/01/2011

CHK

	DATE
--	------