


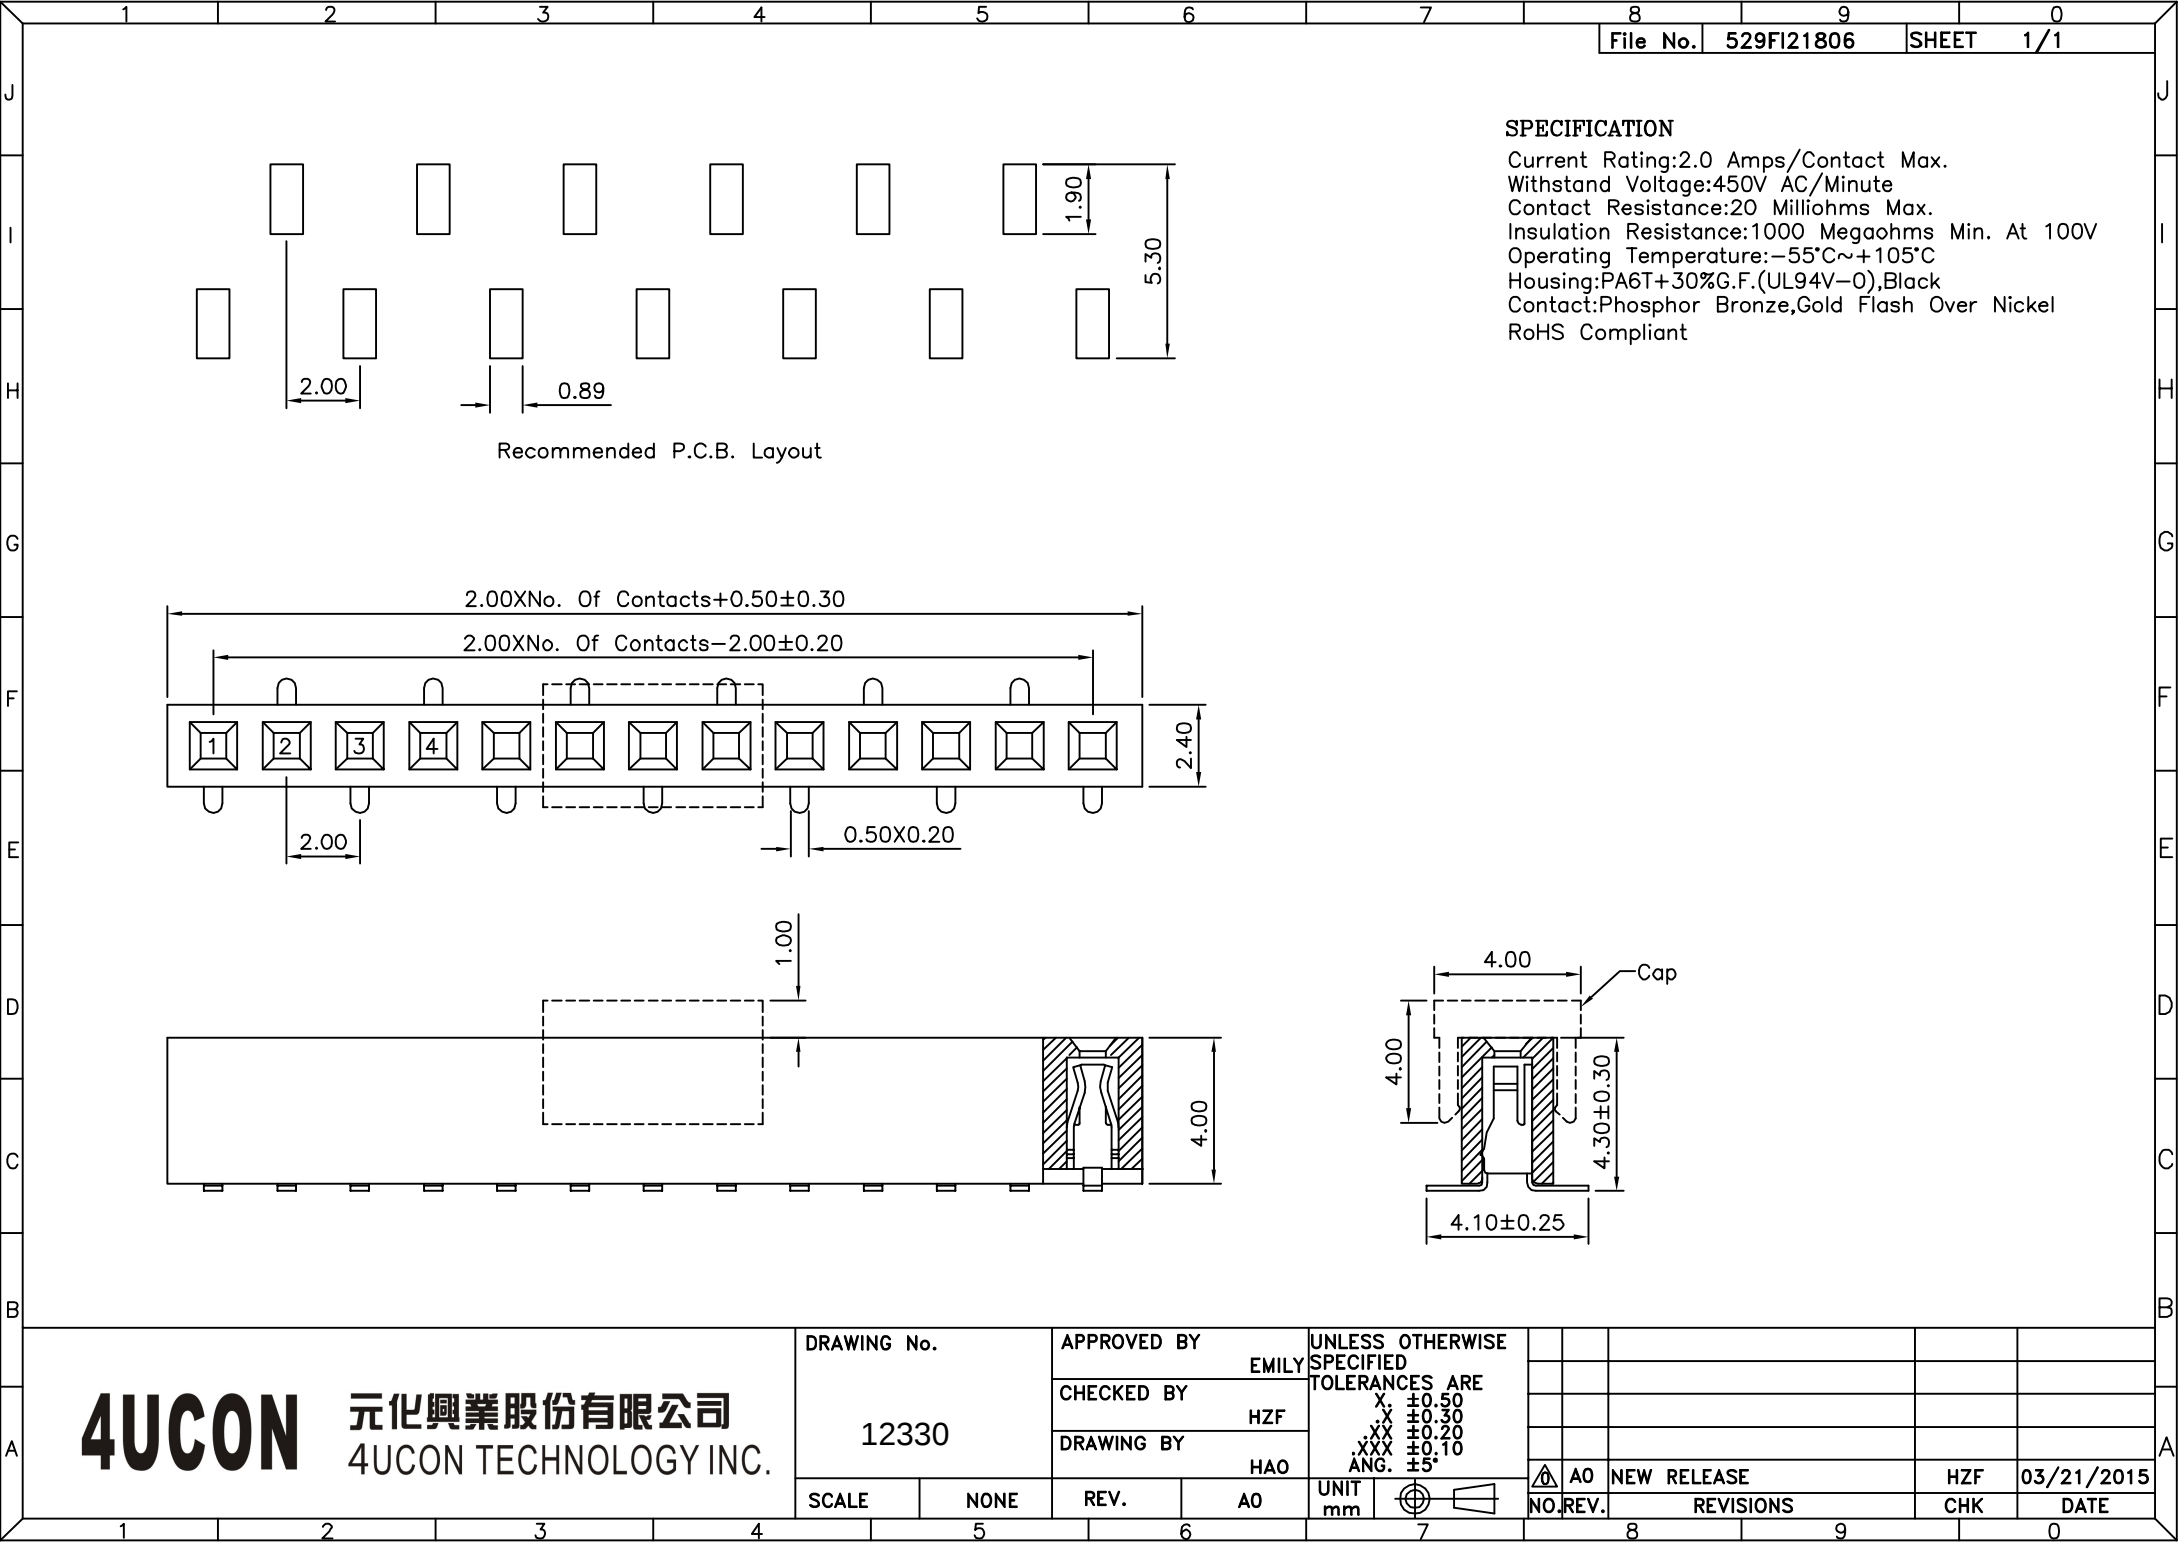

SPECIFICATION
Current Rating:2.0 Amps/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Temperature:-55°C~+105°C
Housing:PA6T+30%G.F.(UL94V-O),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 12330		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY HAO	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 XXX ±0.10 ANG. ±5°		UNIT	mm
		⌀	
		A0	
		NEW RELEASE	

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	03/21/2015