
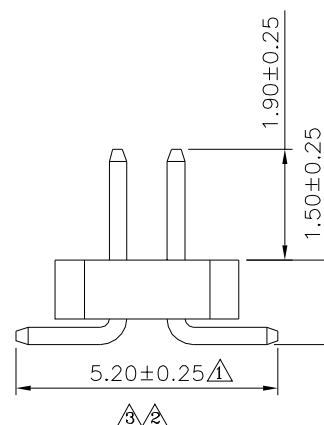
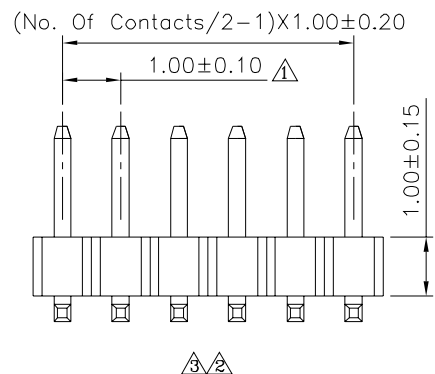
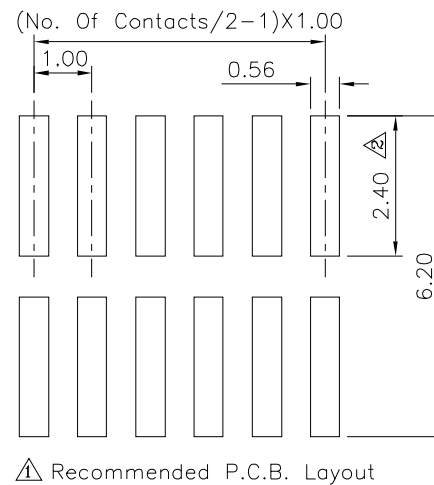


△△ SPECIFICATION

Current:1A
 Operation Temperature:−55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Dielectric Strength:200V AC Minute
 Housing:PA6T(UL94V−0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

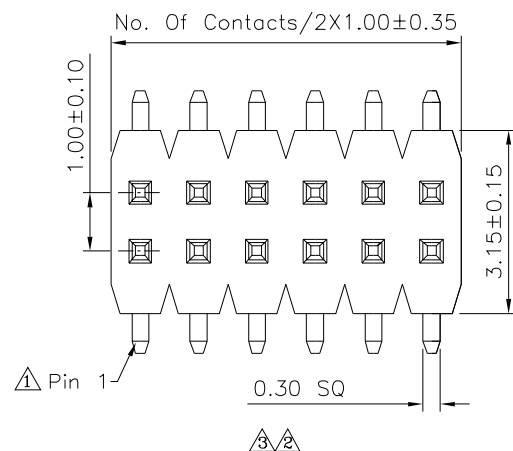

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12358

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^\circ$

SCALE

NONE

REV.

A3

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	06/20/2018
2	A2	Modify Data	HZF	04/24/2014
1	A1	Modify Data	HZF	04/17/2009
0	A0	NEW RELEASE	INGRID	08/02/2007