

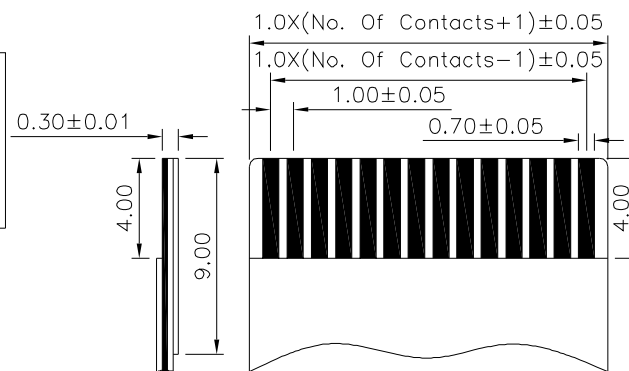


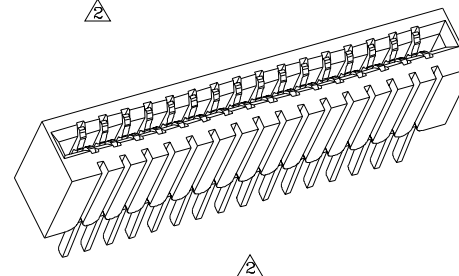

Applicable FPC/FFC
FFC/FPC Thickness:0.25~0.35mm



Pin	A	B	C	Pin	A	B	C
*4	6.00	3.00	5.10	*20	22.00	19.00	21.10
*5	7.00	4.00	6.10	21	23.00	20.00	22.10
*6	8.00	5.00	7.10	*22	24.00	21.00	23.10
*7	9.00	6.00	8.10	23	25.00	22.00	24.10
*8	10.00	7.00	9.10	24	26.00	23.00	25.10
*9	11.00	8.00	10.10	25	27.00	24.00	26.10
*10	12.00	9.00	11.10	26	28.00	25.00	27.10
11	13.00	10.00	12.10	27	29.00	26.00	28.10
*12	14.00	11.00	13.10	28	30.00	27.00	29.10
*13	15.00	12.00	14.10	29	31.00	28.00	30.10
*14	16.00	13.00	15.10	*30	32.00	29.00	31.10
*15	17.00	14.00	16.10	31	33.00	30.00	32.10
*16	18.00	15.00	17.10	*32	34.00	31.00	33.10
17	19.00	16.00	18.10	33	35.00	32.00	34.10
*18	20.00	17.00	19.10	*34	36.00	33.00	35.10
19	21.00	18.00	20.10	35	37.00	34.00	36.10

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

12986

APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X. ± 0.3	$\triangle_2$	X.* $\pm 5^\circ$
.X ± 0.25		.X.* $\pm 2^\circ$
.XX ± 0.20		.XX.* $\pm 1^\circ$
.XXX ± 0.10		.XXX.* $\pm 0.5^\circ$

5		A3	Modify Data	HZF	09/18/2018
		A2	Modify Data	HZF	08/22/2018
		A1	Modify Data	HZF	06/13/2012
		A0	NEW RELEASE	HZF	08/26/2008
	NO. REV.	REVISIONS		CHK	DATE