

△△ SPECIFICATION

1.General Characteristics:

1.0mm FPC XFP SMT 90° Non-ZIF
Dual Contact

2.Material&Finish

Contact:Phosphor Bronze
Tin Plated Over Nickel

Insulator:LCP(UL94V-0),Black

3.Electrical Characteristics:

Current Rating:0.5 Amp Max.
Withstanding Voltage:500V AC RMS
Operating Voltage:50V AC Max.
Contact Resistance:30 Milliohms Max.
Insulation Resistance:500 Megaohms Min.


4.Environmental Characteristics:

Operating Temperature:-25°C~+85°C


5.Mechanical Characteristics:

Durability:60 Milliohms Max.
After 20 Insertions And Withdraw


6.RoHS Compliant

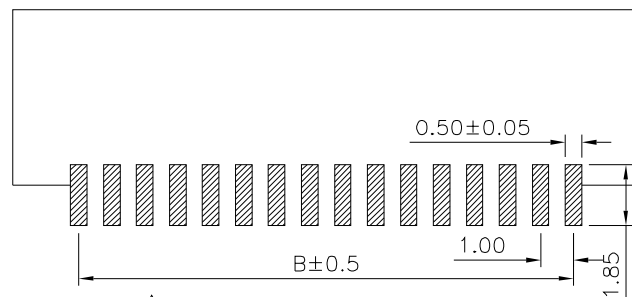


△ Recommended P.C.B. Layout

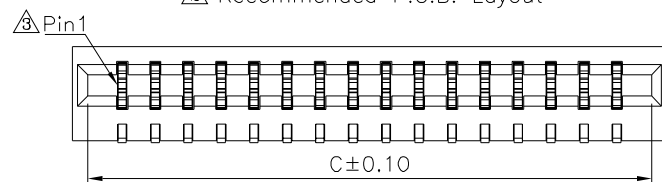


△





△

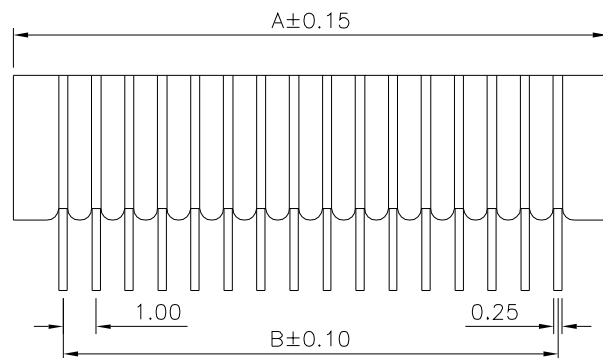

△




△△

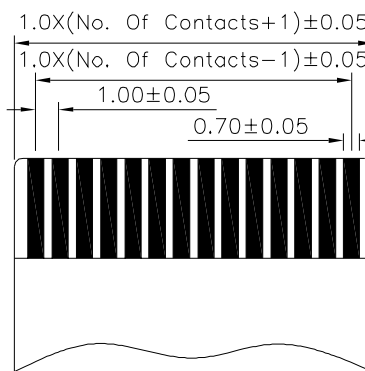


Applicable FPC/FFC
FFC/FPC Thickness:0.25~0.35mm

△△



△

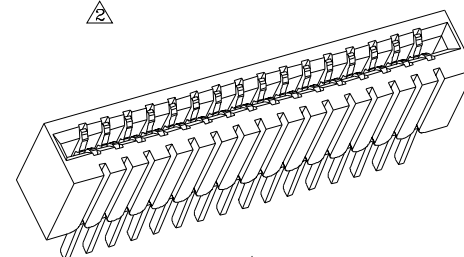

△

△△

Pin	A	B	C	Pin	A	B	C
*4	6.00	3.00	5.10	*20	22.00	19.00	21.10
*5	7.00	4.00	6.10	21	23.00	20.00	22.10
*6	8.00	5.00	7.10	*22	24.00	21.00	23.10
*7	9.00	6.00	8.10	23	25.00	22.00	24.10
*8	10.00	7.00	9.10	24	26.00	23.00	25.10
*9	11.00	8.00	10.10	25	27.00	24.00	26.10
*10	12.00	9.00	11.10	26	28.00	25.00	27.10
11	13.00	10.00	12.10	27	29.00	26.00	28.10
*12	14.00	11.00	13.10	28	30.00	27.00	29.10
*13	15.00	12.00	14.10	29	31.00	28.00	30.10
*14	16.00	13.00	15.10	*30	32.00	29.00	31.10
*15	17.00	14.00	16.10	31	33.00	30.00	32.10
*16	18.00	15.00	17.10	*32	34.00	31.00	33.10
17	19.00	16.00	18.10	33	35.00	32.00	34.10
*18	20.00	17.00	19.10	*34	36.00	33.00	35.10
19	21.00	18.00	20.10	35	37.00	34.00	36.10

The Mark Of "*" Are Toolled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

12987

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.3 △ X.* ±5*
.X ±0.25 .X.* ±2*
.XX ±0.20 .XX.* ±1*
.XXX ±0.10 .XXX.* ±0.5*

UNIT mm

△ A3 Modify Data HZF 09/18/2018

△ A2 Modify Data HZF 08/22/2018

△ A1 Modify Data HZF 06/13/2012

△ A0 NEW RELEASE HZF 08/26/2008

NO.REV. REVISIONS CHK DATE