

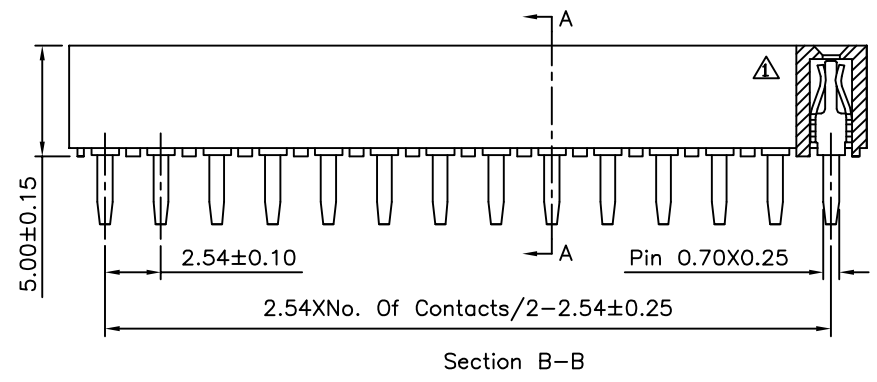


△ Recommended P.C.B. Layout  
(PCB Board Tolerance ±0.05)

- △ SPECIFICATION
- △ Current Rating: 3.0 Amp
  - △ Withstand Voltage: 1000V AC/DC
  - △ Contact Resistance: 20 Milliohms Max.
  - △ Insulation Resistance: 1000 Megaohms Min.
  - △ Operation Temperature: -40°C ~ +105°C
  - △ Contact: Phosphor Bronze, Gold Plated Over Nickel
  - △ Insulator: PA9T+30%G.F., UL94V-0, Black
  - △ RoHS Compliant

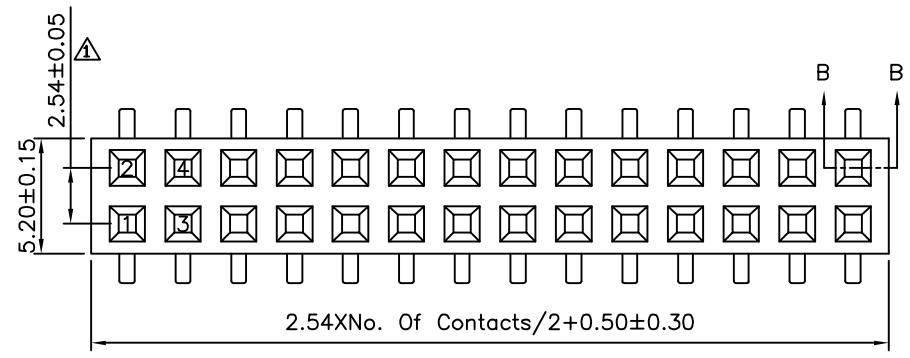

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
13245		MEI	SONG	
SCALE	NONE	CHECKED BY	DRAWING BY	
		HZF	A4	UNIT mm
REV.				NO. REV.

△ A4	Modify Data	HZF	08/29/2012
△ A3	Modify Data	HZF	12/16/2011
△ A2	Modify Data	HZF	06/02/2009
△ A1	Modify Spec.	HZF	03/21/2009
△ A0	NEW RELEASE	HZF	05/27/2008
NO. REV.	REVISIONS	CHK	DATE