

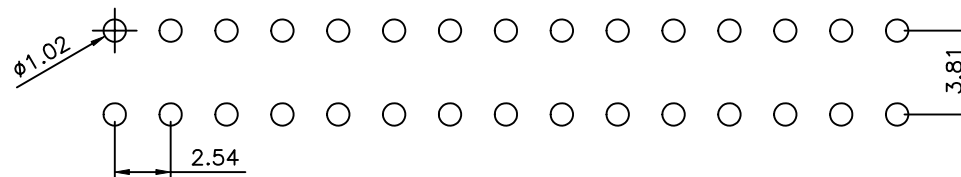



SPECIFICATION

Current Rating:3.0Amp
Voltage Rating:500V AC/DC
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohm Min
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze
Gold Plated Over Nickel
Insulator:PA6T+30%GF UL94V-0
RoHS Compliant

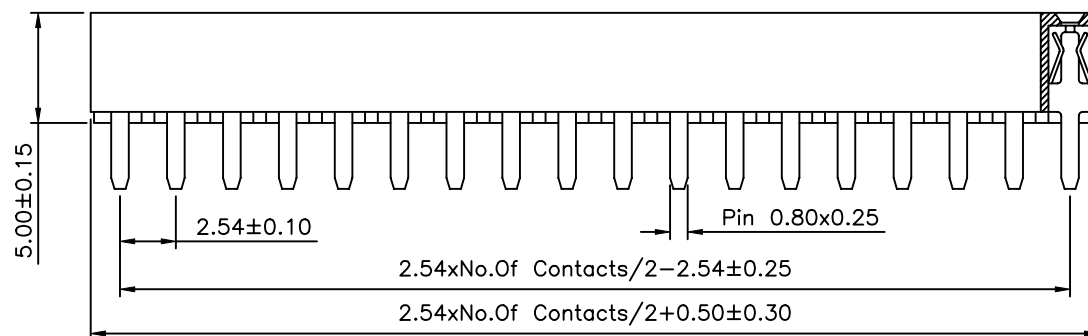

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

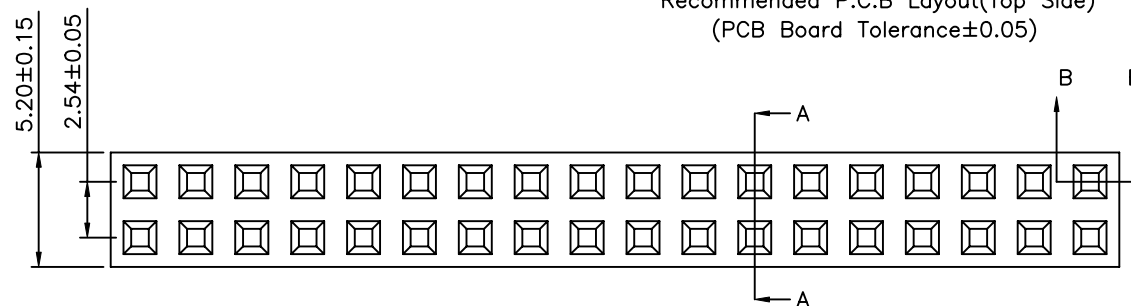

Section: A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13294

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX


REV.

A1

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG: ±3°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify P/N	HZF	05/19/2008
△	A0	NEW RELEASE	HZF	04/25/2007