

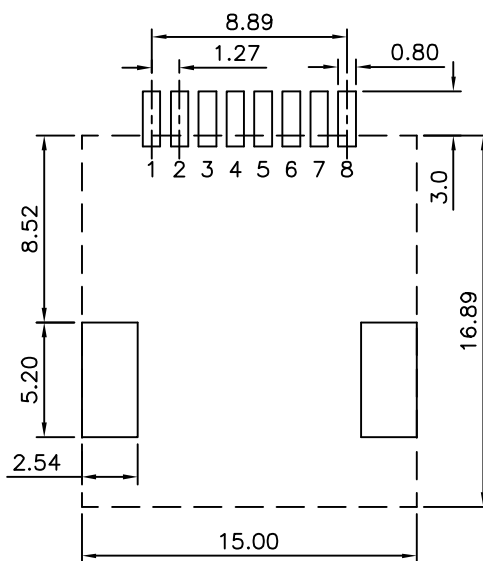
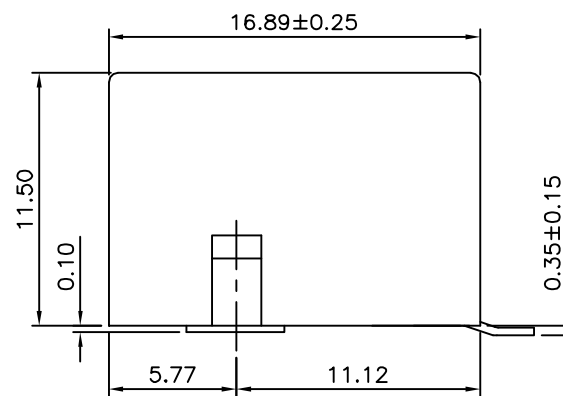
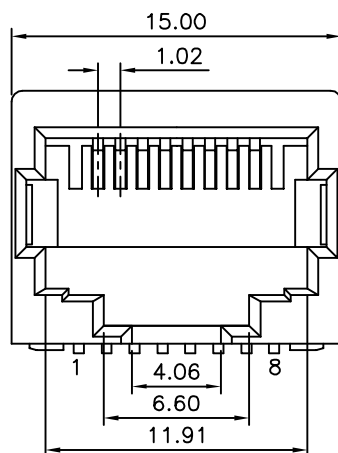


SPECIFICATION

Housing:PA9T(UL94V-0),Black
 Insert Housing:PA46(UL94V-0),Nonmetallic Pearl Color
 Contact:Phosphor Bronze
 Gold Plated 06u" On Contact Area,
 Gold Flash On Other Area,Over Nickel
 Hold Down:Copper Alloy,Tin Plated
 Cavity Confirms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

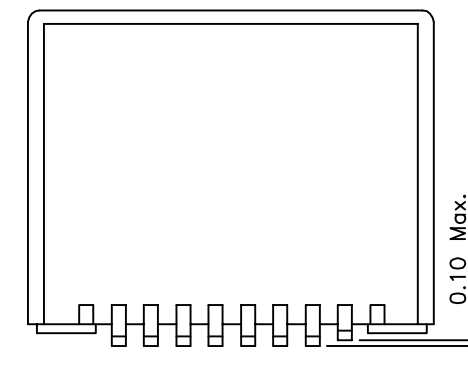

Recommended P.C.B. Layout

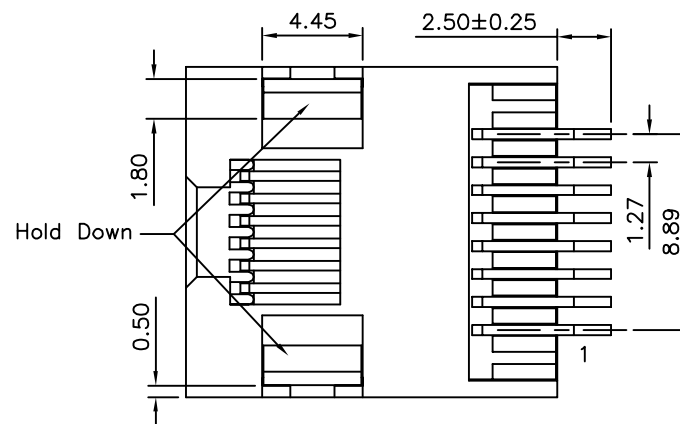

Coplanarity:
 The Maximum Distance Between Lowest And
 Highest Pin When Housing Rests On A Flat Surface

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13394

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05
 ANG. ±0.5°

SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF



02/10/2013

CHK


DATE

SPECIFICATION


Carrier:PS
 Cover Tape:PE,0.10mm Thick Tape
 10 Empty Cavities For Both Of Top And
 Bottom Of The Carrier
 Q'ty:200 PCS/Reel
 RoHS Compliant

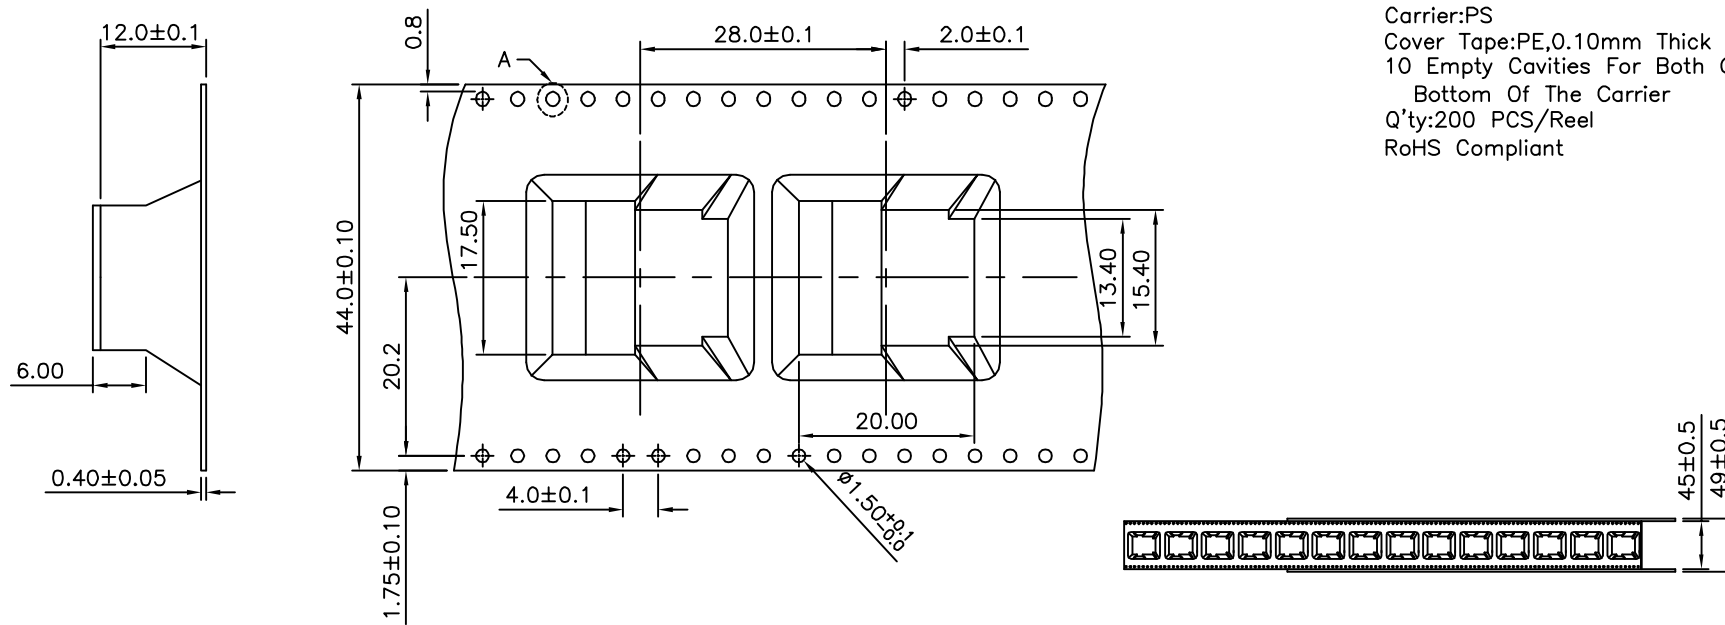

Detail A



Detail B

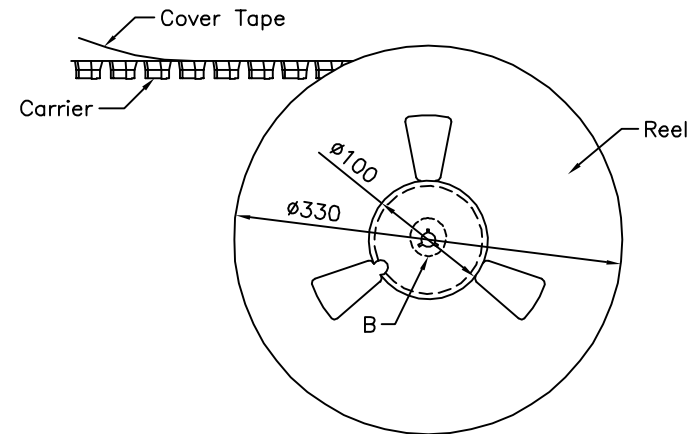

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13394

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 ANG. ±0.5°

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

02/10/2013