

△ SPECIFICATION

Rating:100V AC 1A Max.

Contact Resistance:

Pins:30 Milliohms Max.

Shell:50 Milliohms Max.

Insulation Resistance:

100 Megaohms Min. At 500V DC

Withstand Voltage:250V AC For 1 Minute

Shield Cover:Zinc Alloy,Nickel Plated

Bayonet Cap:Zinc Alloy,Nickel Plated

Strain Boot:PVC


Set Screw:Steel,Nickel Plated

T-Holder:Steel,Nickel Plated

△ Housing:ABS(UL94V-0)

Terminals:Brass,Silver Plated

RoHS Compliant

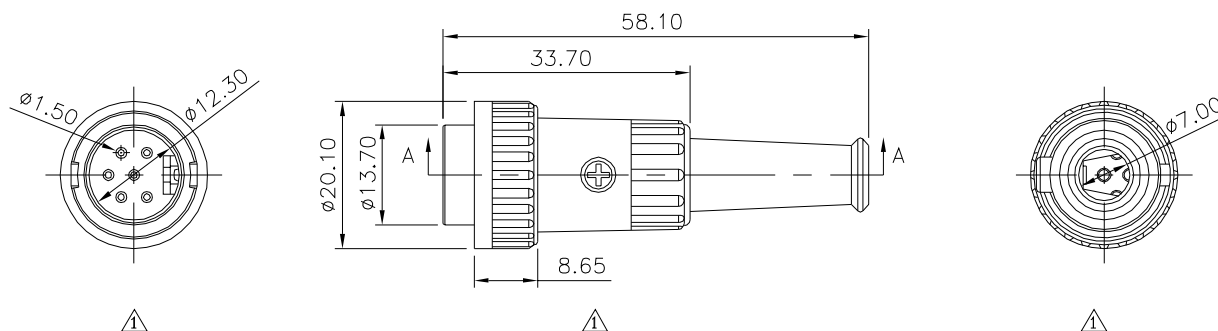

△ Section:A-A

△	13673 (3P)	13674 (4P)	13675 (5P)	13676 (5P,240°)	13677 (6P)	13678 (7P)	13679 (8P)	13680 (8P,262°)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13680

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

A3

UNLESS OTHERWISE

SPECIFIED TOLERANCES ARE

△ .X ±0.38

.XX ±0.25

ANG.

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A3

Modify Data

HZF

08/08/2013

△ A2

Modify Data

HZF

11/23/2010

△ A1

Modify Data

HZF

09/07/2010

△ A0

NEW RELEASE