

P.C.Board Layout

SPECIFICATIONS

Current Rating : 2AMP

Dielectric Withstanding Voltage : AC 1000V For 1 Minute



Insulator Resistance : 1000M Ohms Min At DC 500V

Contact Resistance : 30m Ohms Max At DC 100mA



Operating Temperature : -55°C to +105°C

Housing : 30% Glass Filled PBT UL94V-0

Contacts : Brass

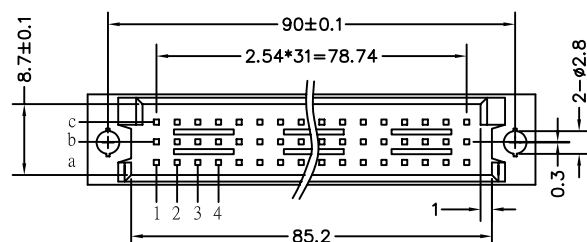

Detail P

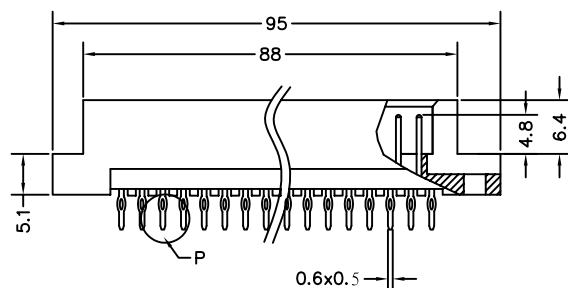

Pitch	x length position	1	2	W1	W2
		4.6	6.3	13	17
2.54mm	96	a b c			
	64	a - c			
	32	a - -			
5.08mm	48	a b c			
	32	a - c			
	16	a - -			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13734

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



NO. REV.

A0

NEW RELEASE

REVISIONS

MEI

DATE

SCALE

NONE

REV.

A0