

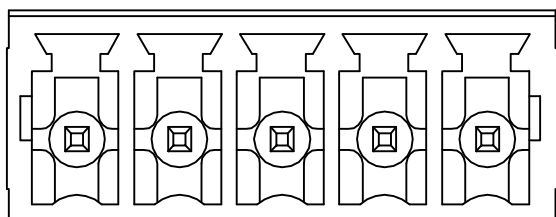


Recommended P.C.B. Layout

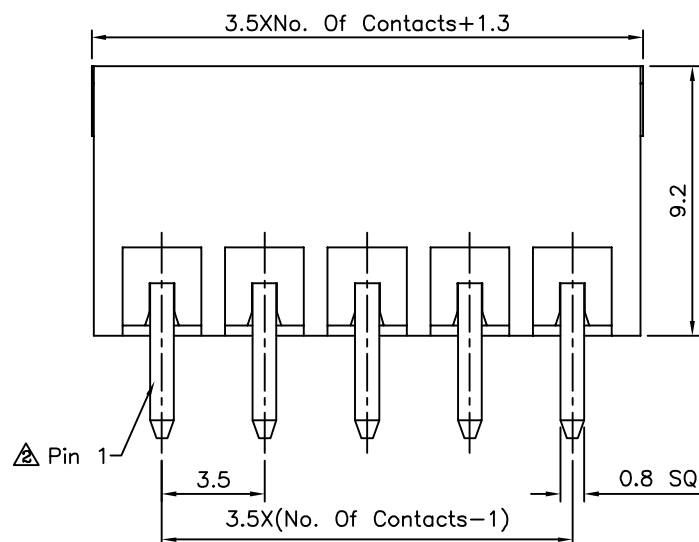

3/4

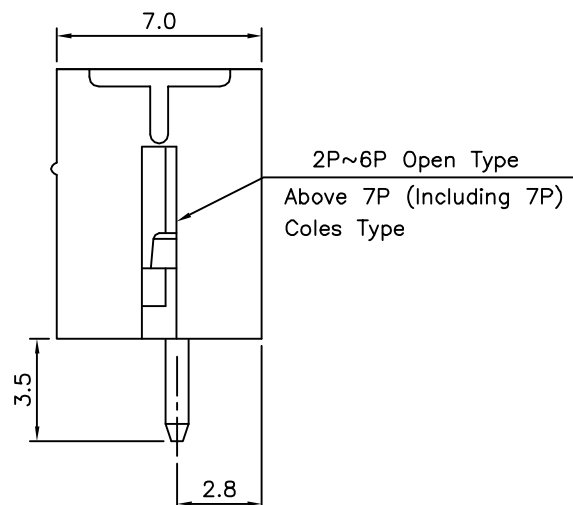

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC For 1 Minute
 Test Time=60 Sec/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0)
 ,Green
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13759

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A4		Modify Data	HZF	05/28/2012
△A3		Modify Data	HZF	11/23/2011
△A2		Add Pin 1	HZF	11/22/2011
△A1		Modify Data	HZF	10/14/2011
△A0		NEW RELEASE	HZF	04/07/2009