


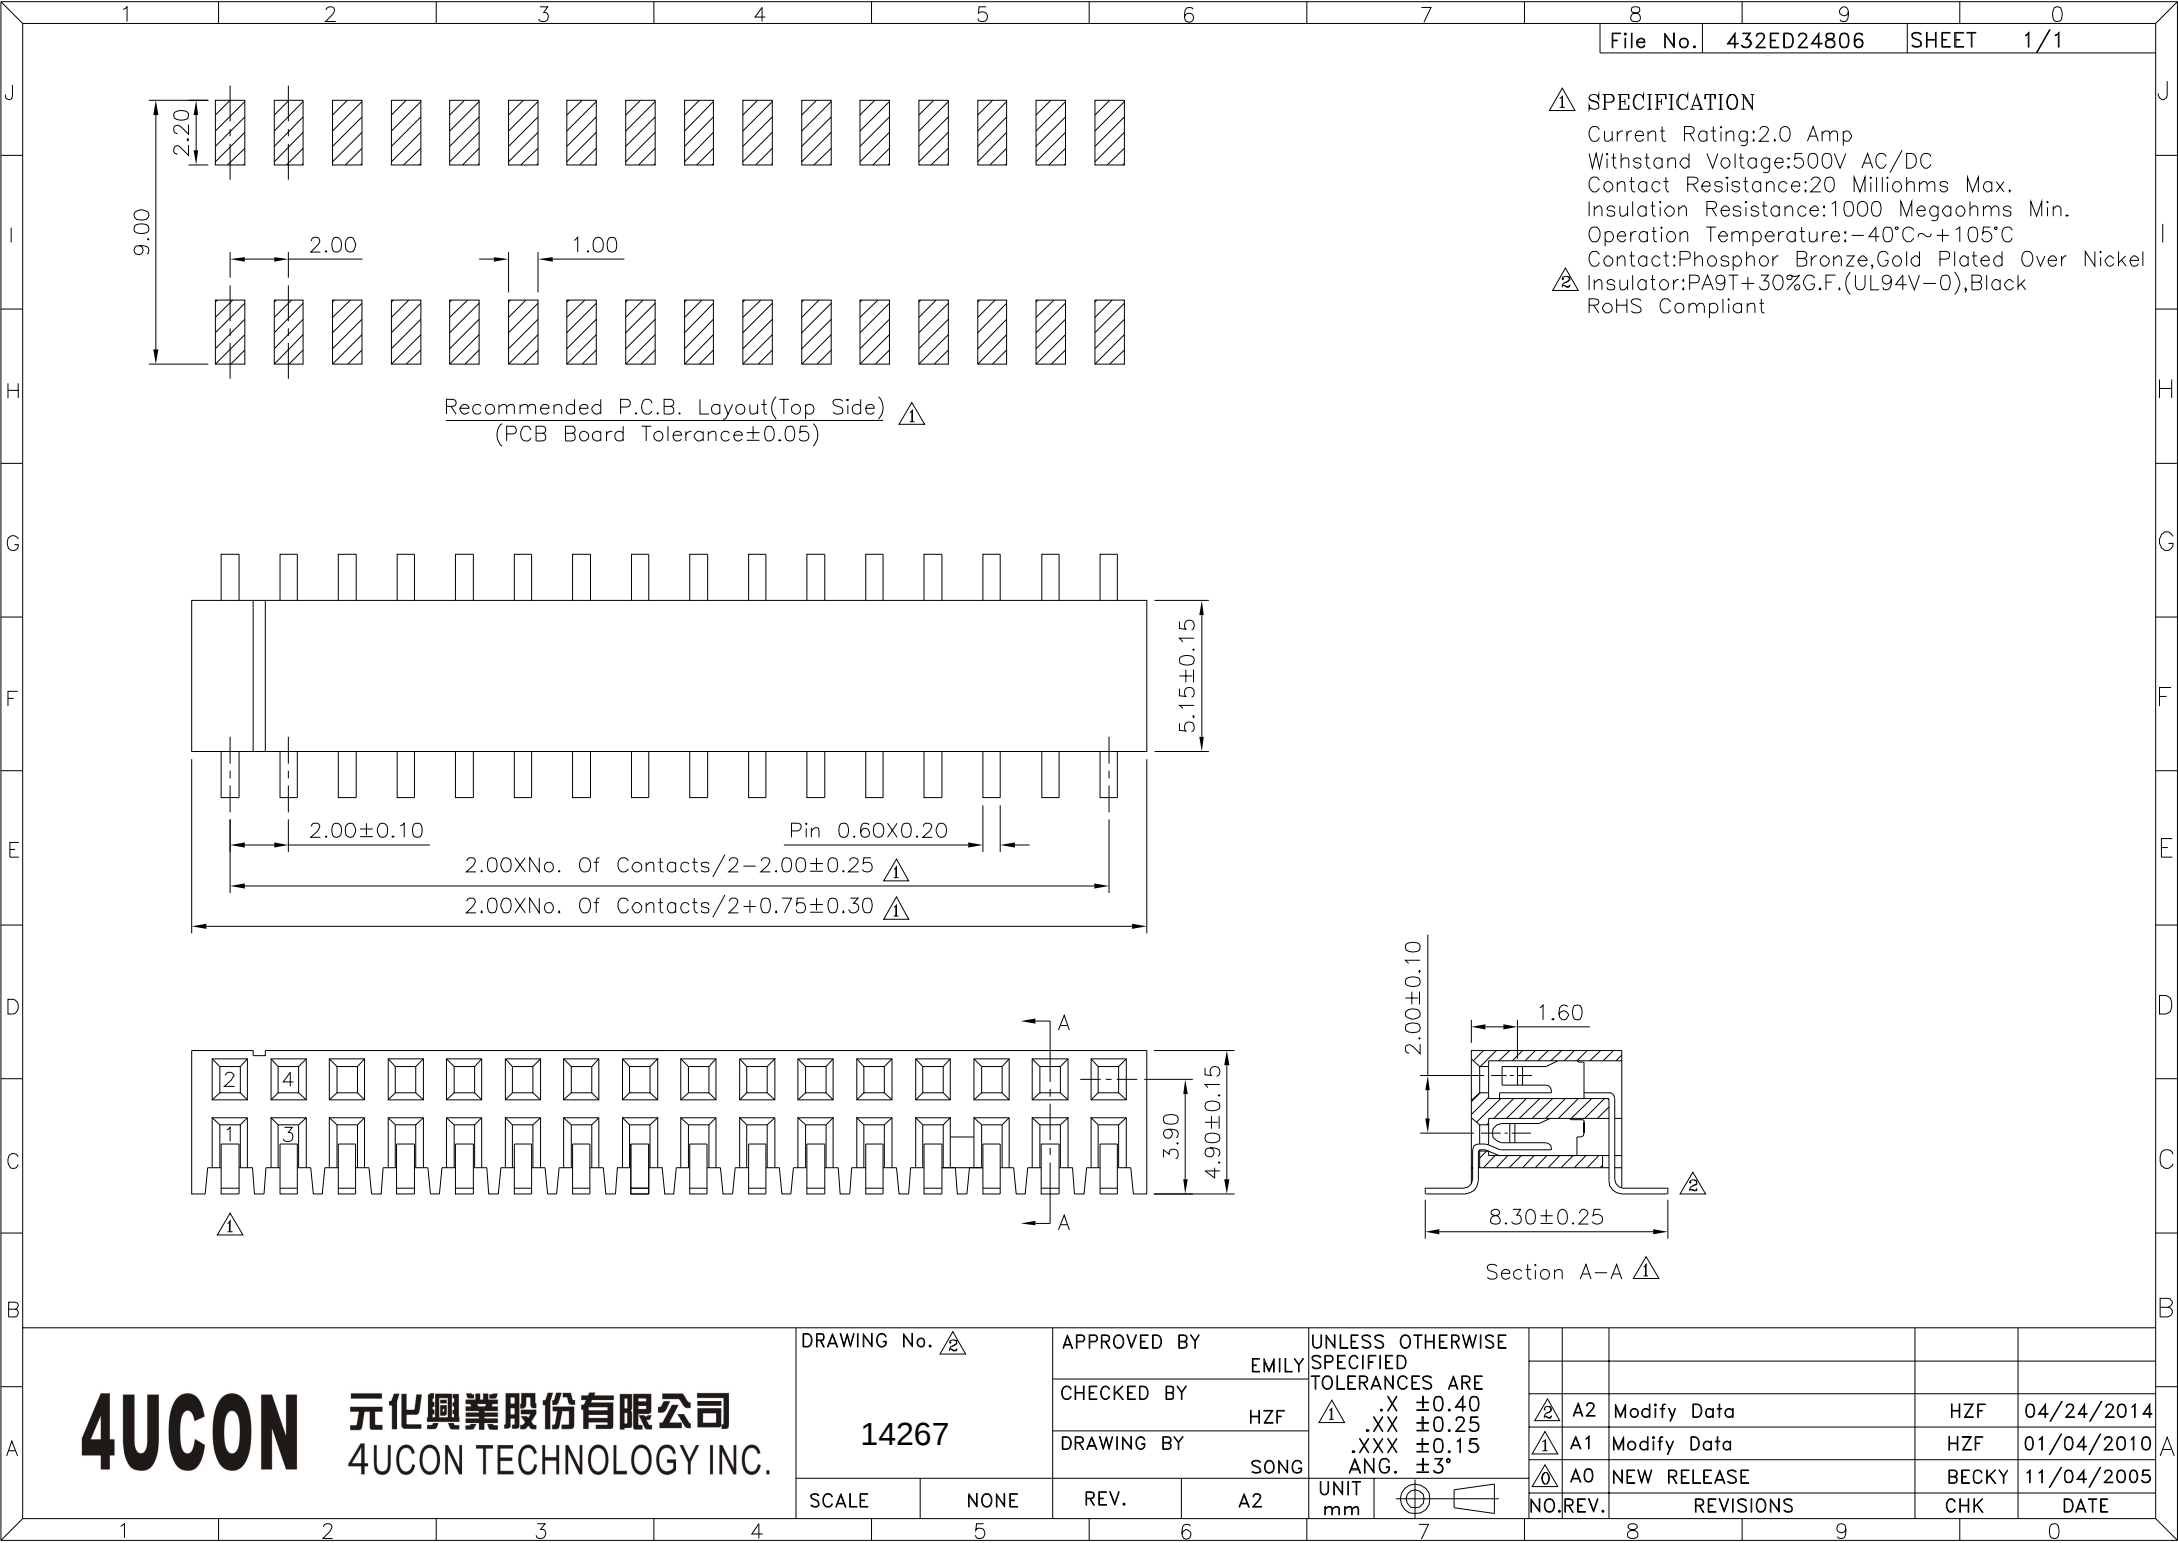

- △ SPECIFICATION
- Current Rating:2.0 Amp
 - Withstand Voltage:500V AC/DC
 - Contact Resistance:20 Milliohms Max.
 - Insulation Resistance:1000 Megaohms Min.
 - Operation Temperature:−40°C~+105°C
 - Contact:Phosphor Bronze,Gold Plated Over Nickel
 - △ Insulator:PA9T+30%G.F.(UL94V-0),Black
 - RoHS Compliant

Recommended P.C.B. Layout(Top Side) △
(PCB Board Tolerance±0.05)

Section A-A △

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △

14267

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A2

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

△ .X ±0.40


.XX ±0.25

.XXX ±0.15

ANG. ±3°

UNIT

mm



--	--	--	--	--

--	--	--	--	--

△ A2	Modify Data	HZF	04/24/2014
------	-------------	-----	------------

△ A1	Modify Data	HZF	01/04/2010
------	-------------	-----	------------

△ A0	NEW RELEASE	BECKY	11/04/2005
------	-------------	-------	------------

NO. REV.	REVISIONS	CHK	DATE
----------	-----------	-----	------