


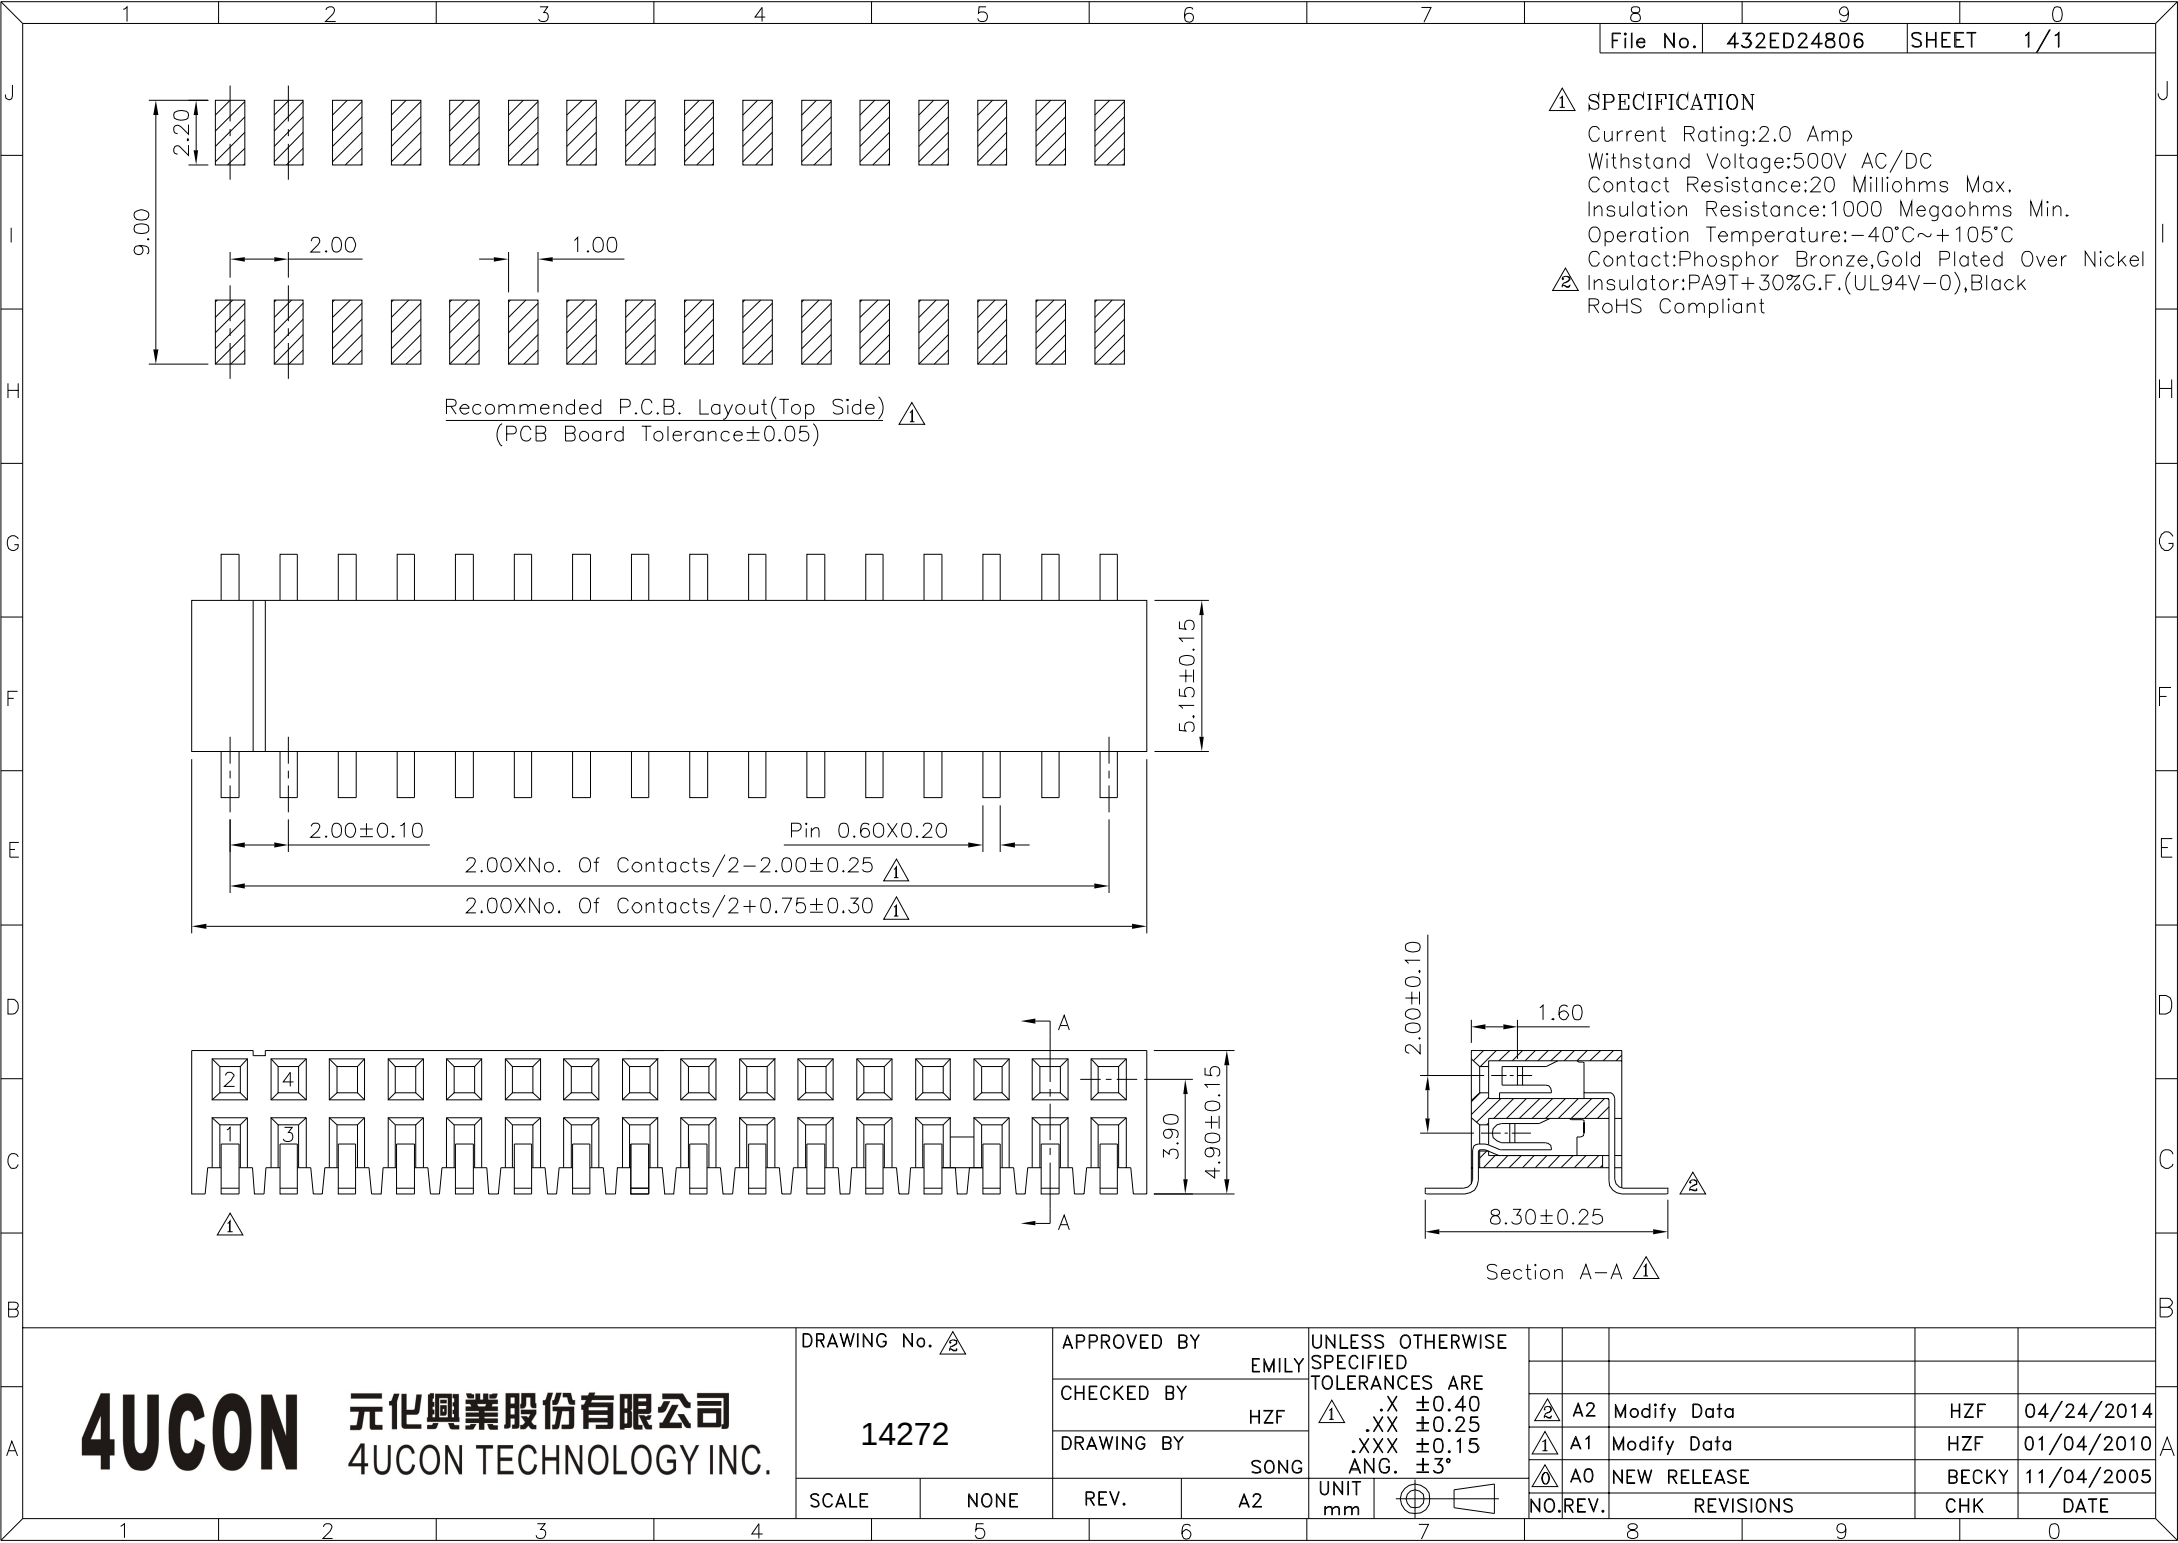

△ SPECIFICATION
Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side) △
(PCB Board Tolerance±0.05)

Section A-A △

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △ 14272		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY SONG	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ① .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3° UNIT mm							
		②	A2	Modify Data		HZF	04/24/2014
		①	A1	Modify Data		HZF	01/04/2010
		①	A0	NEW RELEASE		BECKY	11/04/2005
		NO.	REV.	REVISIONS	CHK	DATE	