
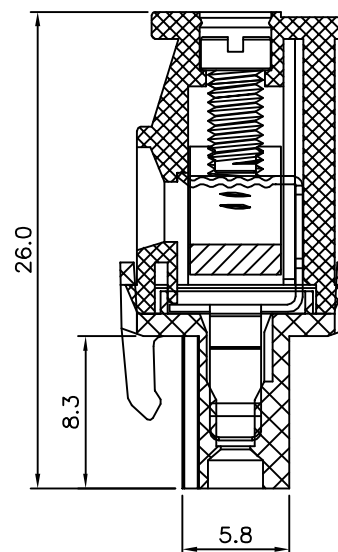
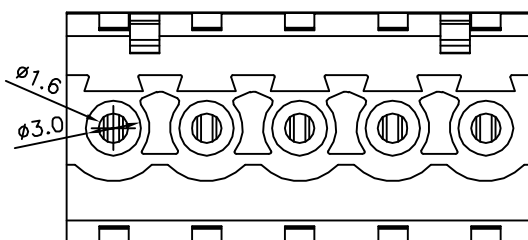
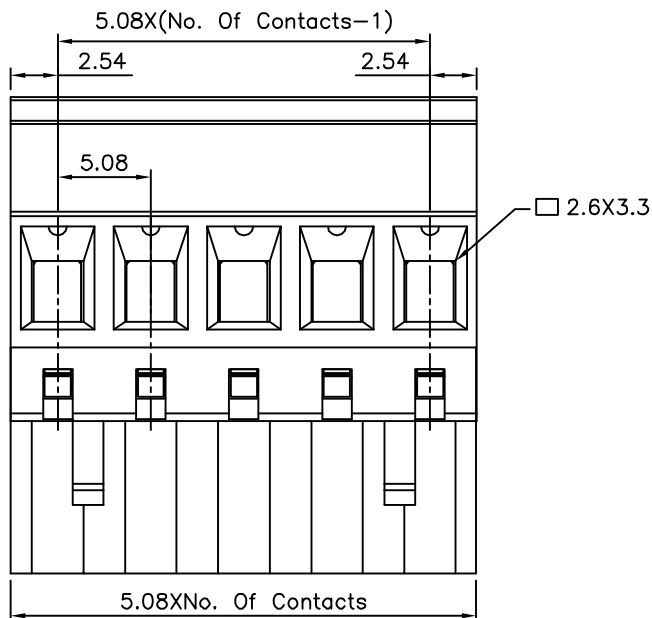


SPECIFICATION

Current Rating:16 Amp/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec./1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C/
5 Seconds Max.
Wire Range:12~26 AWG
Torque:5.0 kgf.cm/M3
Insulator Body(Housing):Polyamide(UL94V-0),Green
⚠Contact(Metal Housing):Copper Alloy,Nickel Plated
⚠Wire Guard:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

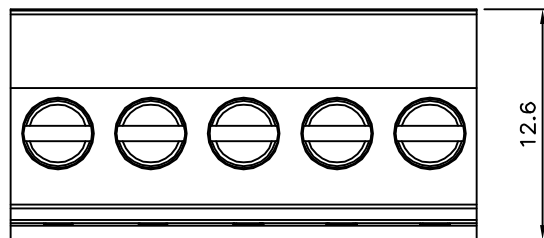

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14401

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X* ±1°

SCALE


NONE

REV.

A1

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A1	Modify Data	HZF	06/01/2015
⚠ A0	NEW RELEASE	HZF	06/21/2011