

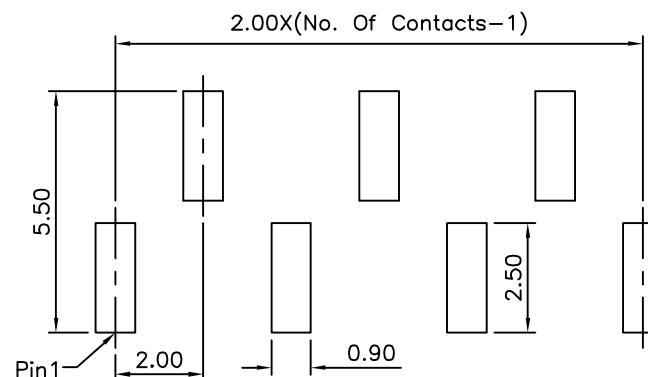
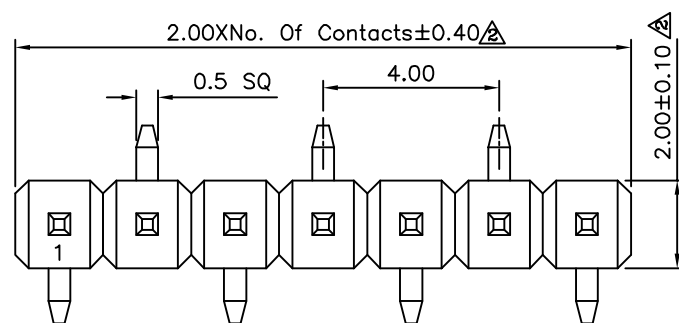


△△ SPECIFICATION

Current:1A
 Dielectric Strength:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

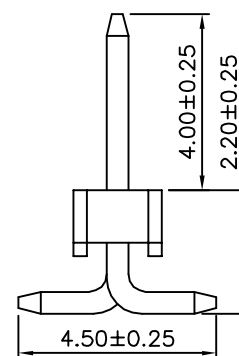

△ Recommended P.C.B. Layout

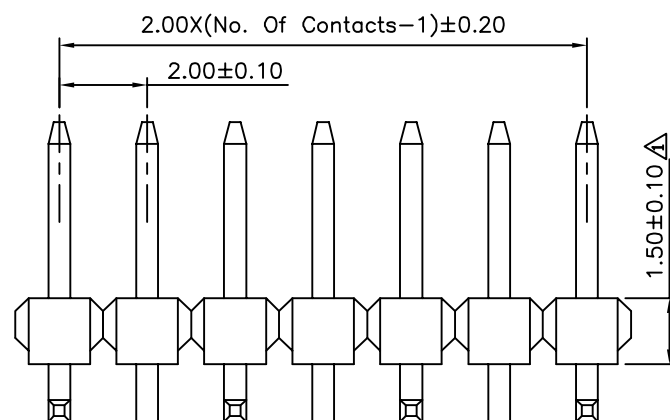

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14991

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE

NONE

REV.

A3

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	01/14/2014
△	A2	Modify Data	HZF	12/18/2012
△	A1	Modify Data	HZF	09/03/2009
△	A0	NEW RELEASE	SHIN	04/15/2007