


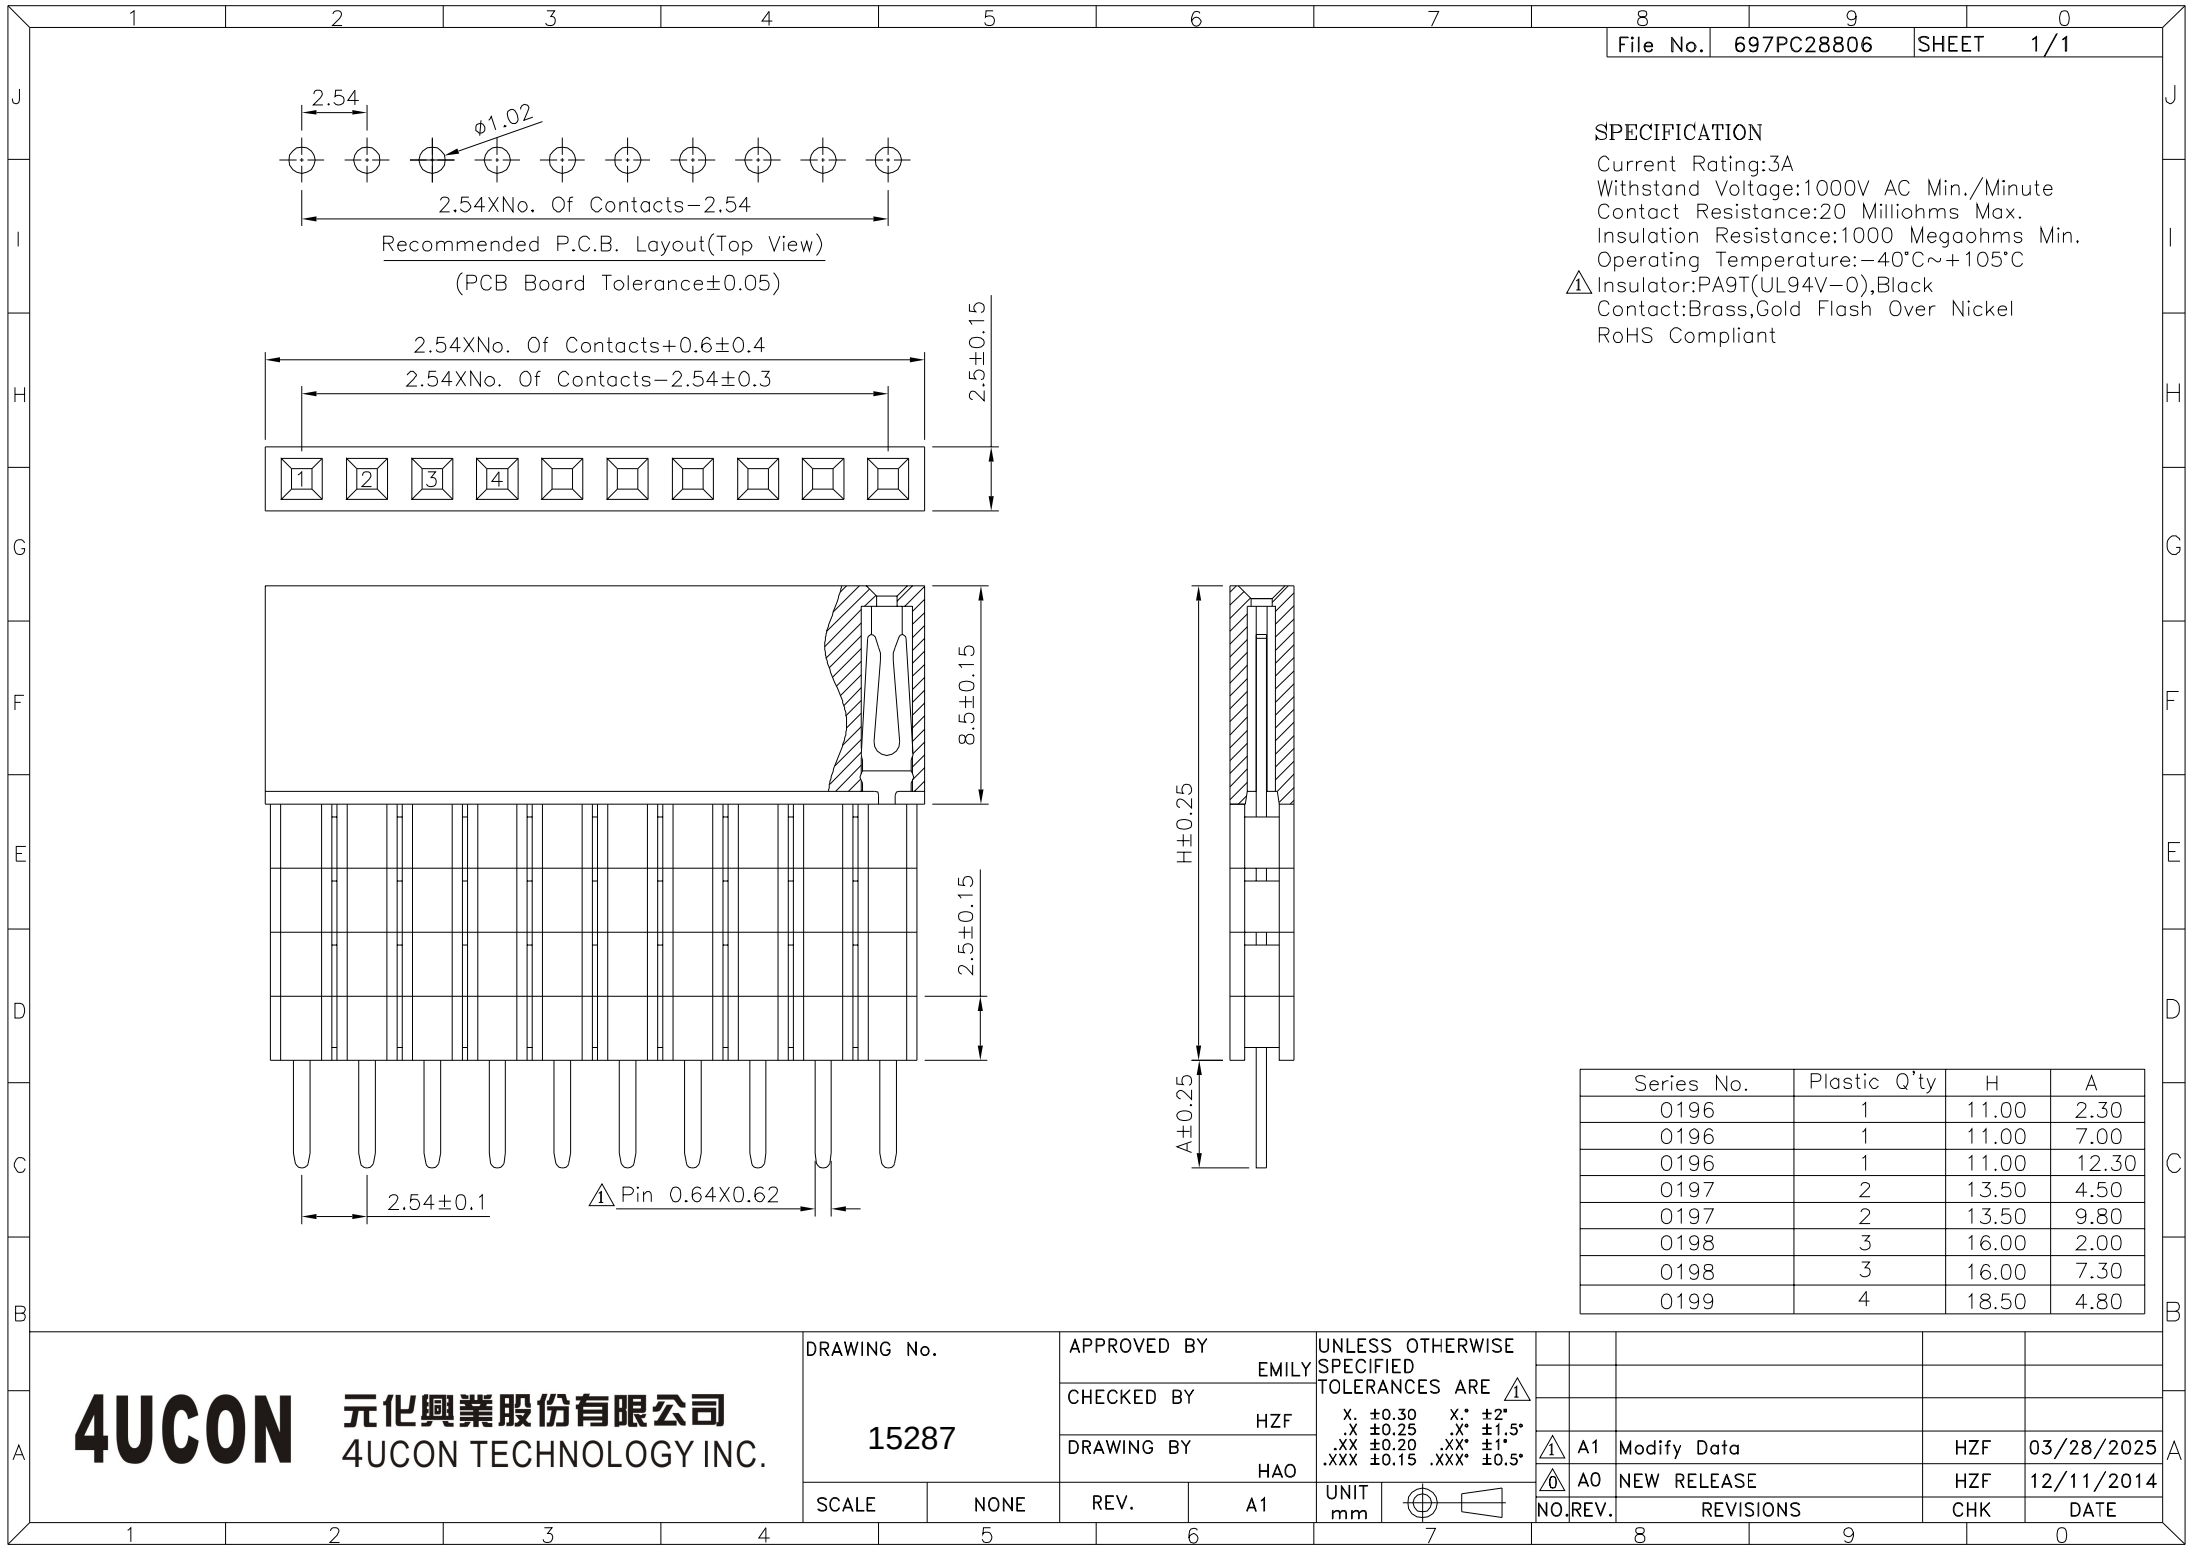

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
 $\triangle$ Insulator:PA9T(UL94V-O),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
15287

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
HAO

SCALE NONE REV. A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE $\triangle$
X. ± 0.30 X. $\pm 2^\circ$
.X ± 0.25 .X $\pm 1.5^\circ$
.XX ± 0.20 .XX $\pm 1^\circ$
.XXX ± 0.15 .XXX $\pm 0.5^\circ$

NO.	REV.	REVISIONS	CHK	DATE
$\triangle$	A1	Modify Data	HZF	03/28/2025
$\triangle$	A0	NEW RELEASE	HZF	12/11/2014