

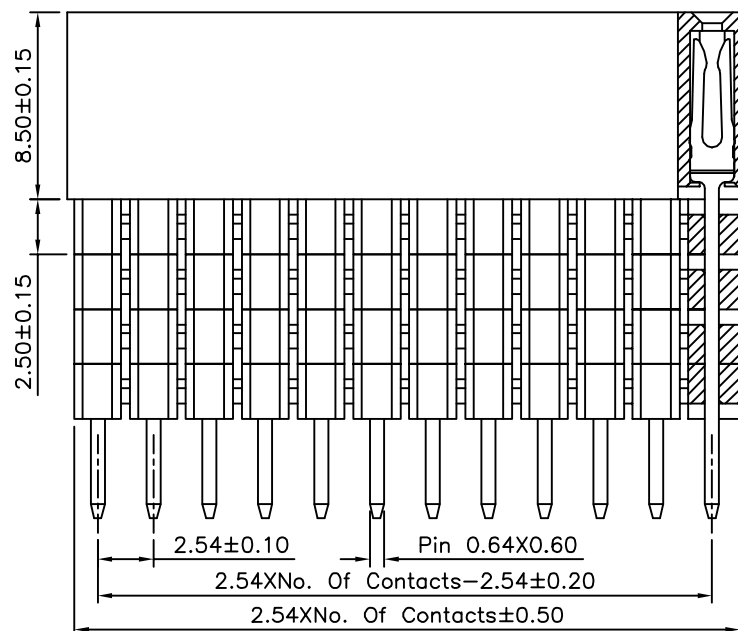
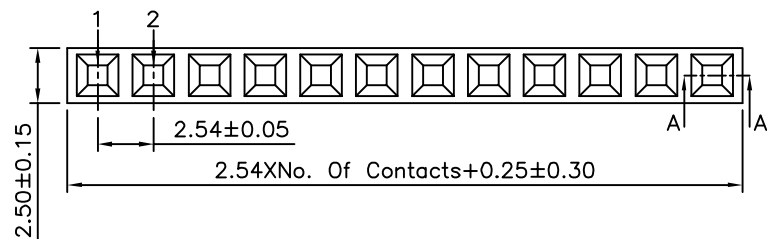


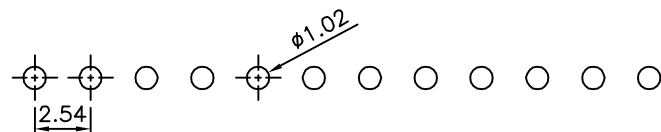

Section A-A

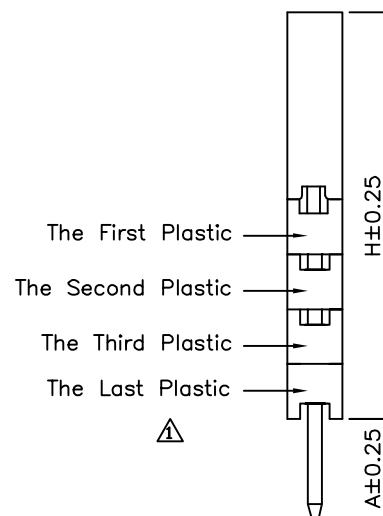

The First Plastic

The Second Plastic

The Third Plastic

The Last Plastic



# SPECIFICATION

Current Rating: 3.0 Amp  
 Withstand Voltage: 1000V AC/DC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Contact: Brass, Gold Plated Over Nickel  
 Insulator: PBT+30%G.F.(UL94V-0), Black  
 RoHS Compliant

| Series No. | Plastic Q'ty | H     | A    |
|------------|--------------|-------|------|
| 0196       | 1            | 11.05 | 2.30 |
| 0196       | 1            | 11.05 | 7.35 |
| 0196       | 1            | 11.05 | 12.2 |
| 0197       | 2            | 13.59 | 4.85 |
| 0197       | 2            | 13.59 | 9.65 |
| 0198       | 3            | 16.13 | 2.30 |
| 0198       | 3            | 16.13 | 7.10 |
| 0199       | 4            | 18.67 | 4.60 |

DRAWING No.

15312

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

B1

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X  $\pm 0.40$   
 .XX  $\pm 0.25$   
 .XXX  $\pm 0.15$   
 ANG.  $\pm 3^{\circ}$

UNIT  
 mm



NO.

REV.

B1 Modify Data

B0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

10/22/2012

05/23/2012

DATE

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.