

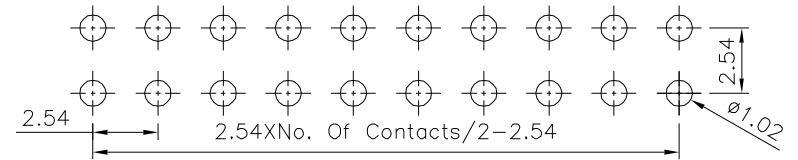
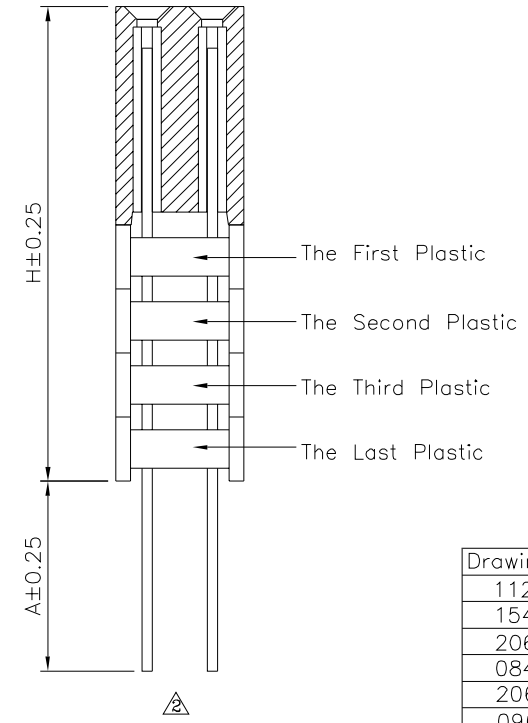


**SPECIFICATION**  
 Current Rating:3A  
 ⚠ Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 ⚠ Insulator:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

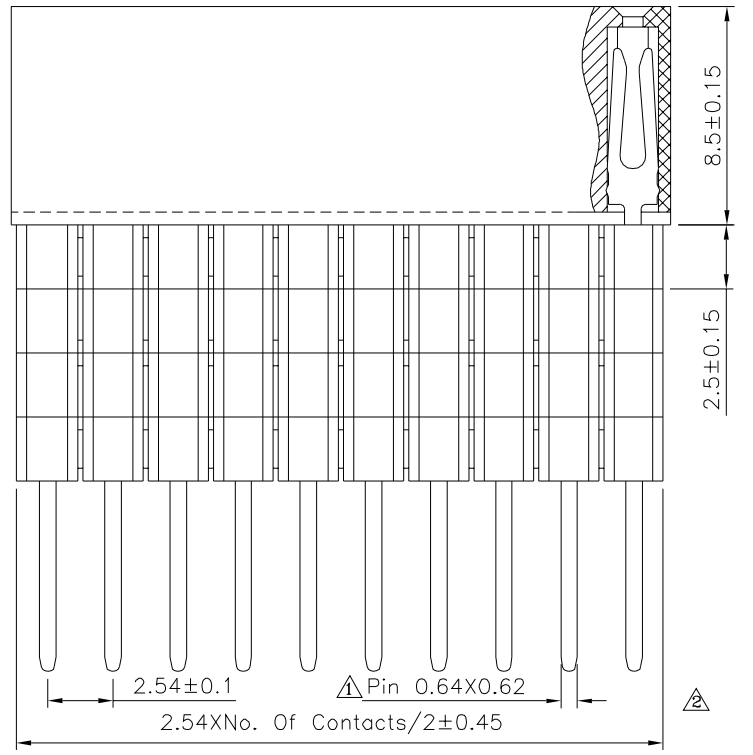

Recommended P.C.B. Layout (Top View)  
 (PCB Board Tolerance ±0.05)

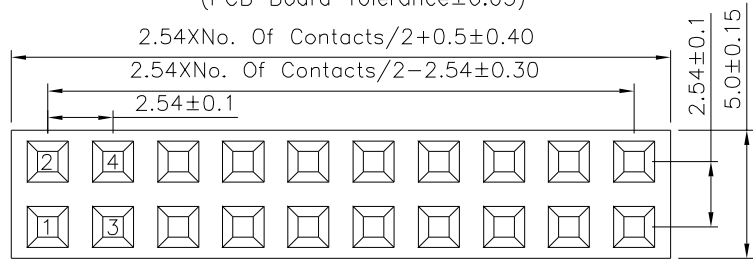

Drawing no.	Series no.	Plastic Q'ty	H	A
11264	0196	1	11.00	2.30
15417	0196	1	11.00	7.00
20622	0196	1	11.00	12.30
08491	0197	2	13.50	4.50
20662	0197	2	13.50	9.80
09664	0198	3	16.00	2.00
00157	0198	3	16.00	7.30
11774	0199	4	18.50	4.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .x ±0.30    x. ±2° .x ±0.25    .x. ±1.5° .xx ±0.20    .xx. ±1.0° .xxx ±0.15    .xxx. ±0.5°
15376		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		HAO		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	01/26/2024
⚠	A1	Modify Data	HZF	12/20/2023
⚠	A0	NEW RELEASE	HZF	05/03/2014