

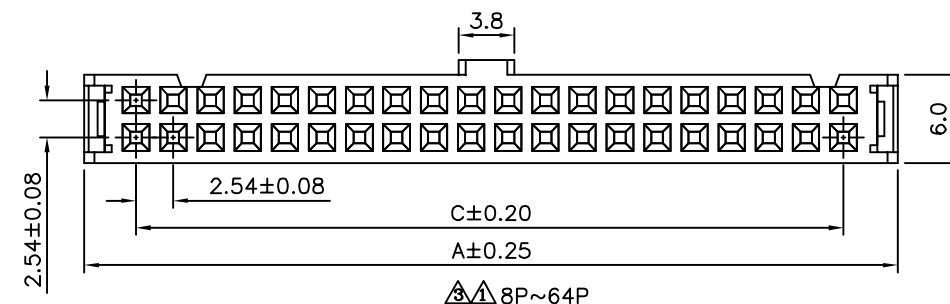

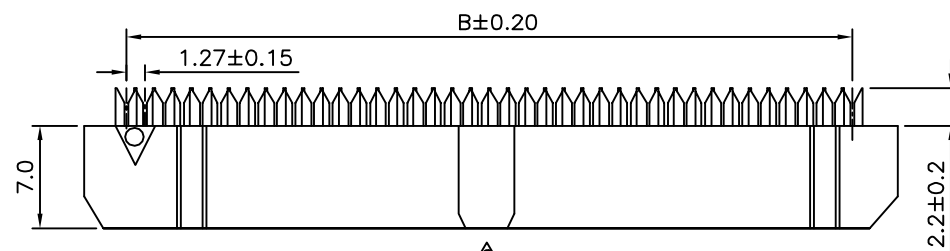



SPECIFICATION
△ Current Rating:1A
Voltage Rating:250V AC/DC
Withstanding Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:−40°C~+105°C
Insulator:PBT+G.F.(UL94V−0),Black
△ Contact:Brass,Selective Gold Plated Over Nickel
RoHS Compliant

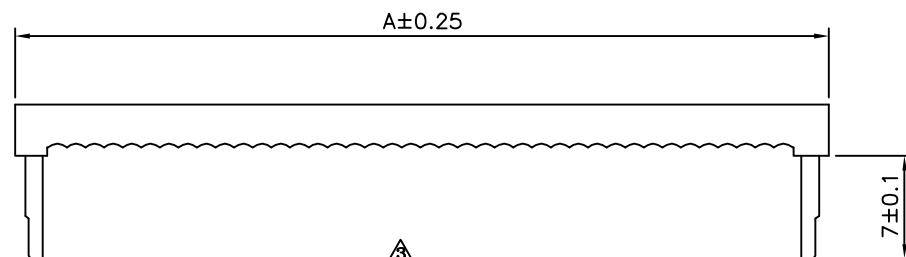

△ Pin	A	B	C
6	12.32	6.35	5.08
8	14.86	8.89	7.62
10	17.40	11.43	10.16
12	19.94	13.97	12.70
14	22.48	16.51	15.24
16	25.02	19.05	17.78
18	27.56	21.59	20.32
20	30.10	24.13	22.86
24	35.18	29.21	27.94
26	37.72	31.75	30.48
30	42.80	36.83	35.56
34	47.88	41.91	40.64
36	50.42	44.45	43.18
40	55.50	49.53	48.26
44	60.58	54.61	53.34
50	68.20	62.23	60.96
60	80.90	74.93	73.66
64	85.98	80.01	78.74

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15738

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.3

.X ±0.2

.XX ±0.1

.XXX ±0.05

UNIT

mm



△ A3

Modify Data

HZF

05/24/2012

△ A2

Modify Data

HZF

10/06/2010

△ A1

Modify Data

HZF

08/13/2010

△ A0

NEW RELEASE

HZF

10/20/2009

NO. REV.

REVISIONS

CHK

DATE