
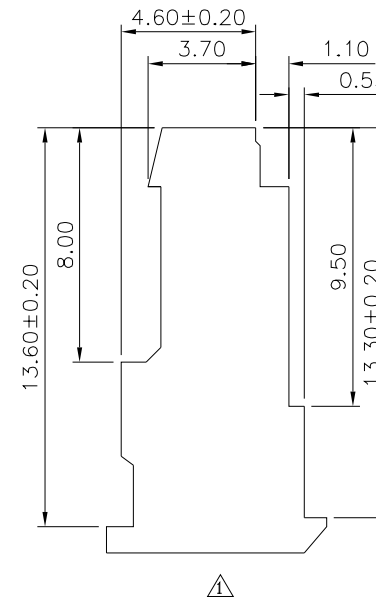
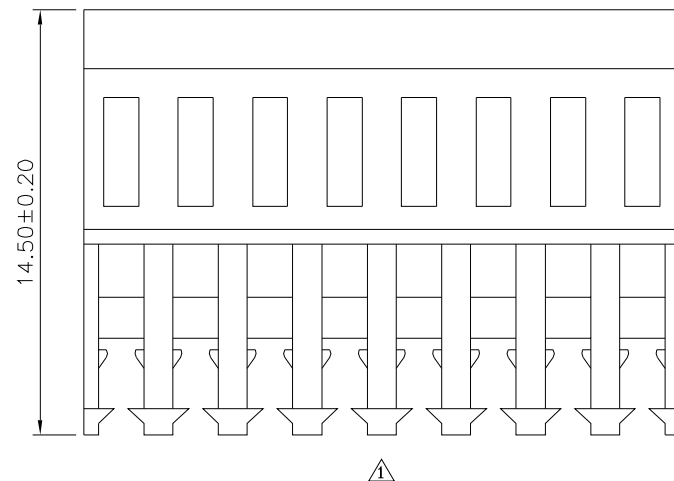


△ SPECIFICATION

Current Rating: 3A AC/DC
Voltage Rating: 250V AC Max.
Withstand Voltage: 1500V AC/Minute
Contact Resistance: Initial Value/10 Milliohms Max.
After Environmental Testing/20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Temperature Range: -40°C~+105°C
Insulator: PA66(UL94V-2), Nature
Contact: Brass, Tin Plated
Applicable Wire: AWG#22~#28
Mates With 0.64mm Pins
Terminal Retention To Housing 6.6 lbs Min.
RoHS Compliant

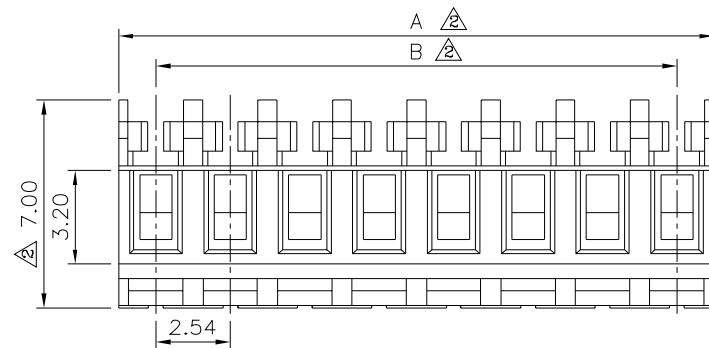

	Pin	A	B	Tol.	Pin	A	B	Tol.
	2	5.08	2.54	±0.20	16	40.64	38.10	±0.30
	3	7.62	5.08		17	43.18	40.64	
	4	10.16	7.62		18	45.72	43.18	
	5	12.70	10.16		19	48.26	45.72	
	6	15.24	12.70		20	50.80	48.26	
	7	17.78	15.24	±0.25	21	53.34	50.80	±0.35
	8	20.32	17.78		22	55.88	53.34	
	9	22.86	20.32		23	58.42	55.88	
	10	25.40	22.86		24	60.96	58.42	
	11	27.94	25.40		25	63.50	60.96	
	12	30.48	27.94	±0.30	26	66.04	63.50	±0.38
	13	33.02	30.48		27	68.58	66.04	
	14	35.56	33.02		28	71.12	68.58	
	15	38.10	35.56					

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

15911

SCALE	NONE
-------	------

NONE

APPROVED BY

ME

CHECKED BY

HZI


DRAWING BY

CY

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

1	.X	± 0.20
	.XX	± 0.10
	.XXX	± 0.05
	X.	$\pm 2^\circ$
	.X°	$\pm 1^\circ$

UNIT	mm
------	----



	A2
---	----

2	Modify Data
---	-------------

HZF

	02/26/2018
--	------------

	A1
---	----

1	Modify Data
---	-------------

HZF

03/01/2011

	A0
△ 0	A0

0	NEW RELEASE
---	-------------

BECKY

12/09/2004

NO.	REV.
-----	------

V.	REVISIONS
----	-----------

CHK

DATE
