

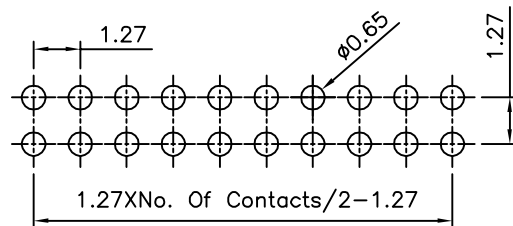
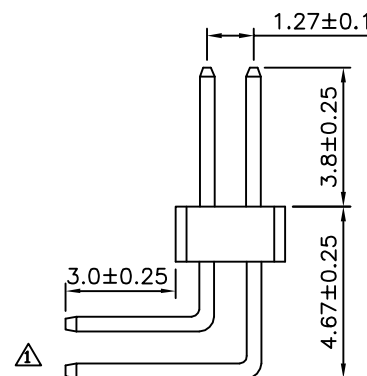


SPECIFICATION

Current Rating:1 Amp
 Withstanding Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

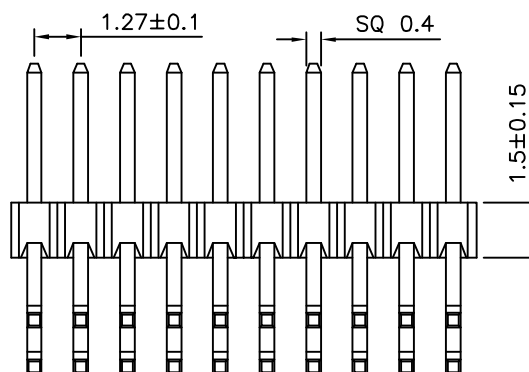

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

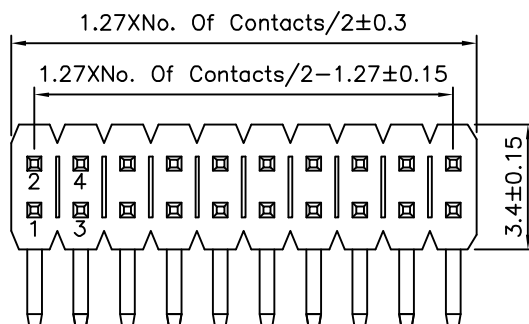

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16431

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25	X.* ±2"
.X ±0.20	.X* ±1.5"
.XX ±0.15	.XX* ±1"
.XXX ±0.10	.XXX* ±0.5"

UNIT
 mm



A1

NO.

REV.

Modify Data

A0

NEW RELEASE

REVISIONS

HZF

HZF

CHK

DATE

06/26/2015

08/27/2013

DATE