

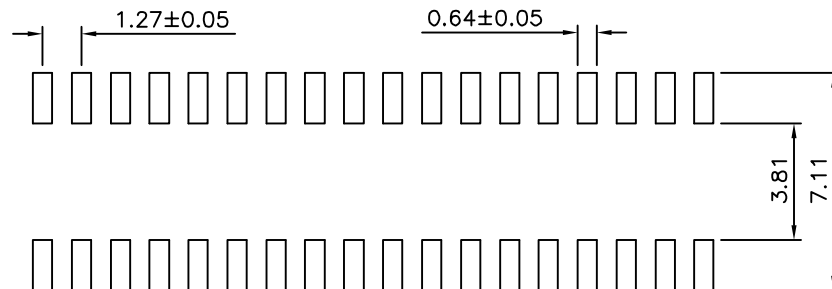


# SPECIFICATION

Current Rating:1.0A/Contact Max.  
 Withstand Voltage:300V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T+30%G.F.(UL94V-O),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant



Recommended P.C.B. Layout

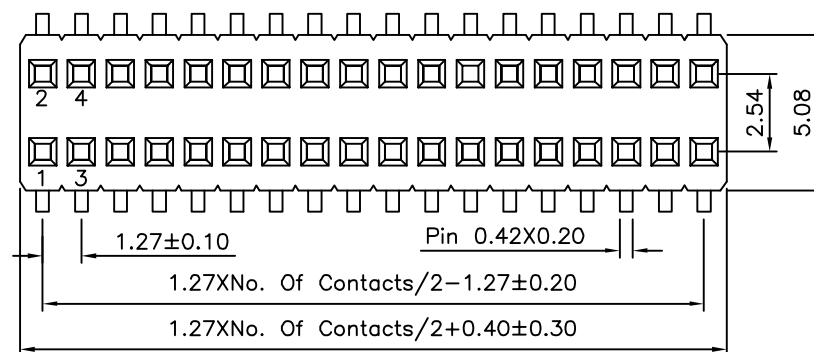

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

16711

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A0

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

X. ±0.50  
 X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±5°

UNIT

mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

NO. REV.

REVISIONS

CHK

DATE