

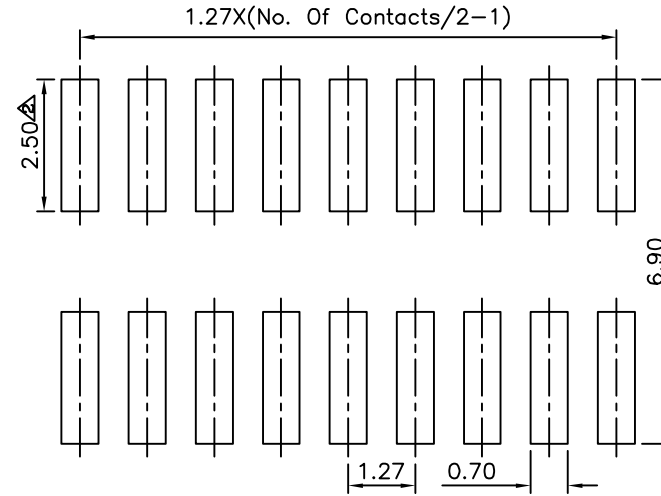
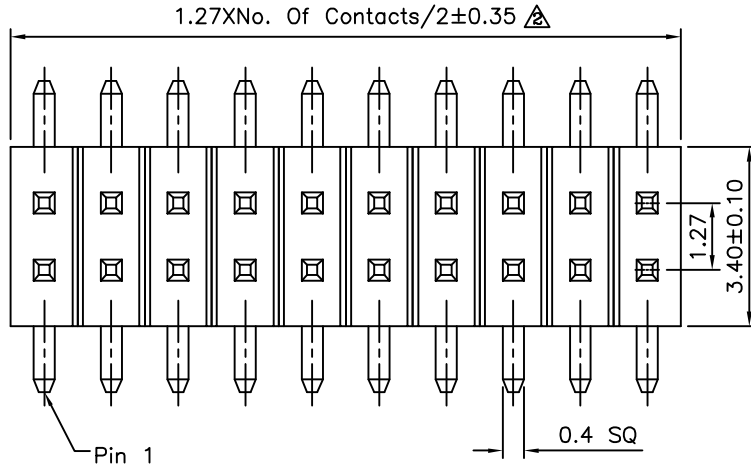


SPECIFICATION

Current:1A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Strength:1000V AC/Minute
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

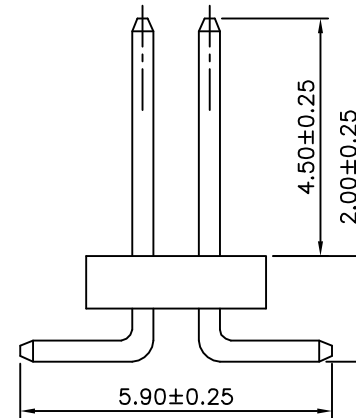

Recommended P.C.B. Layout

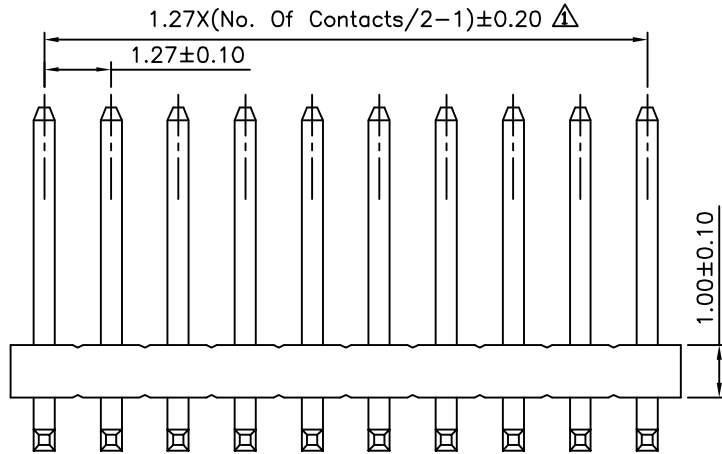

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16872

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



A3	Modify Data		HZF	11/26/2013
A2	Modify Data		HZF	05/17/2011
A1	Modify Data		HZF	11/13/2009
A0	NEW RELEASE		BECKY	02/04/2005
NO REV.	REVISIONS		CHK	DATE