



SPECIFICATION

Current:1A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Strength:1000V AC/Minute
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant


1.27X(No. Of Contacts/2-1)

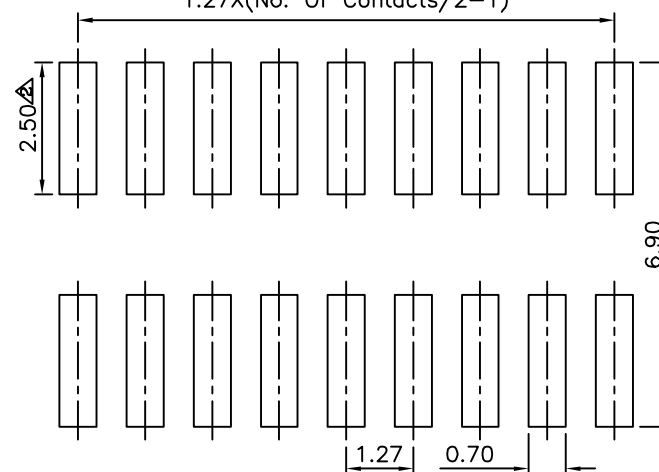


Recommended P.C.B. Layout

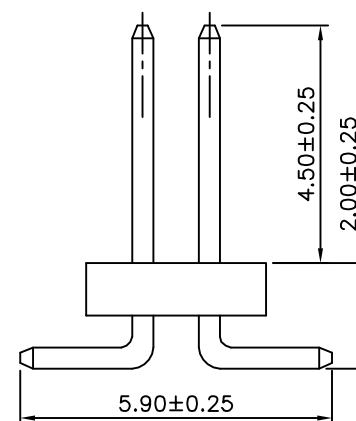

1.27XNo. Of Contacts/2±0.35

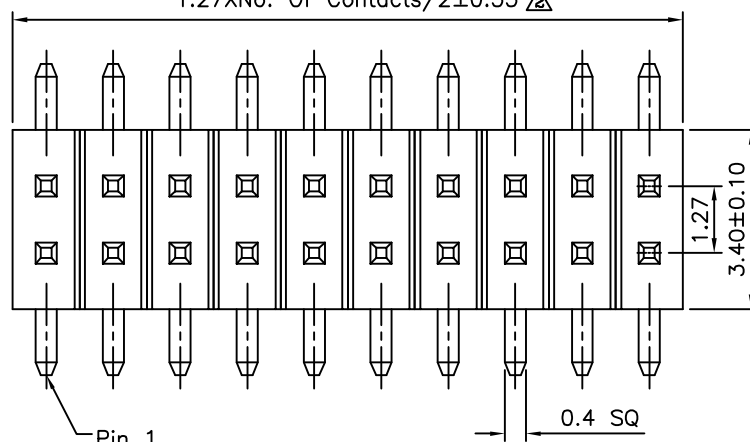

1.27X(No. Of Contacts/2-1)±0.20

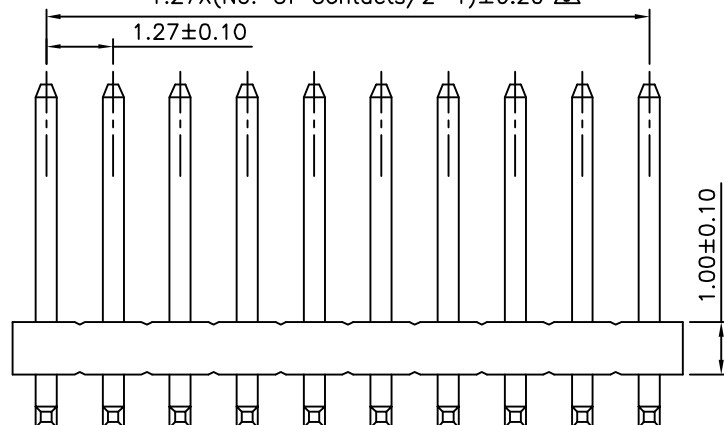

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16875

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT mm



NO.

REV.

REVISIONS

Modify Data

Modify Data

Modify Data

NEW RELEASE

BECKY

DATE

HZF

HZF

HZF

BECKY

DATE

DATE

11/26/2013

05/17/2011

11/13/2009

02/04/2005

DATE

DATE