




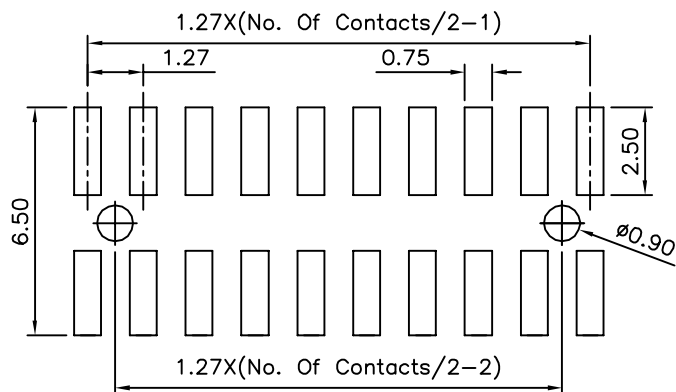


△ Recommended P.C.B. Layout


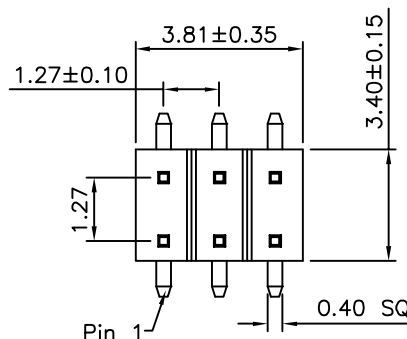


△


△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

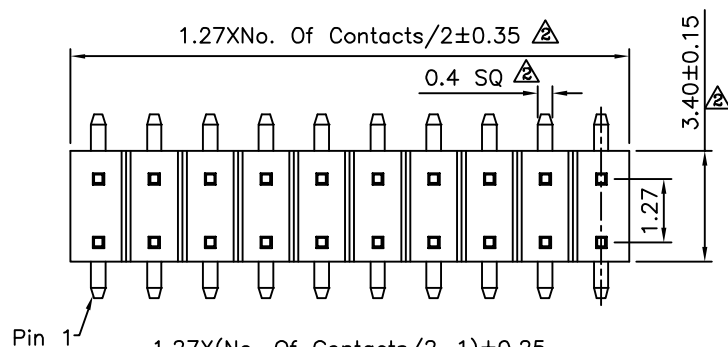

△ 06 Pin

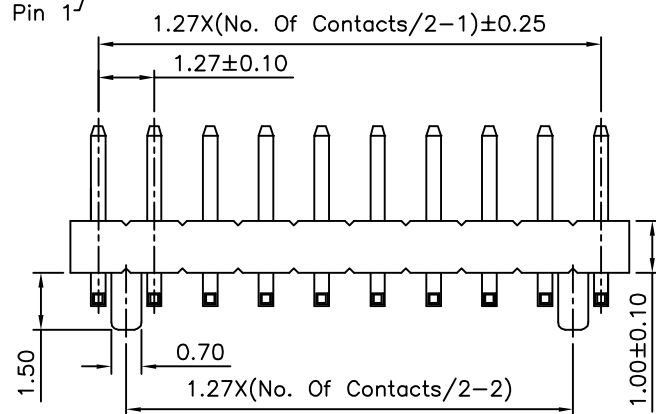

△ 08~100 Pin



△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16892

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE

NONE

REV.

A2

UNIT

mm

UNIT

mm

	A2	Modify Data	HZF	07/29/2011
	A1	Modify Data	HZF	02/01/2007
	A0	NEW RELEASE	HZF	12/02/2008
NO	REV	REVISIONS	CHK	DATE