




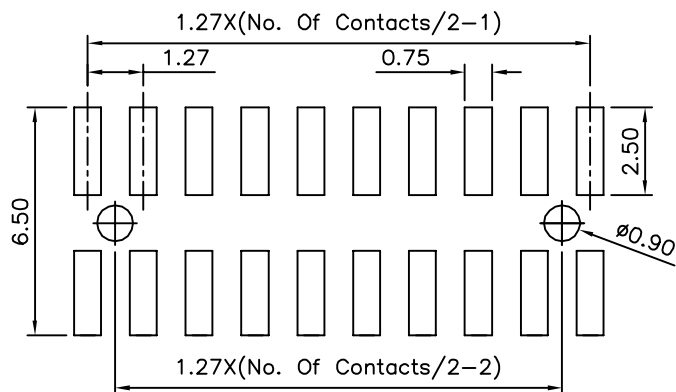



Recommended P.C.B. Layout

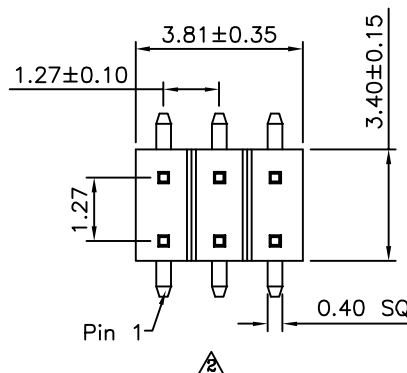



06 Pin



06 Pin



08~100 Pin

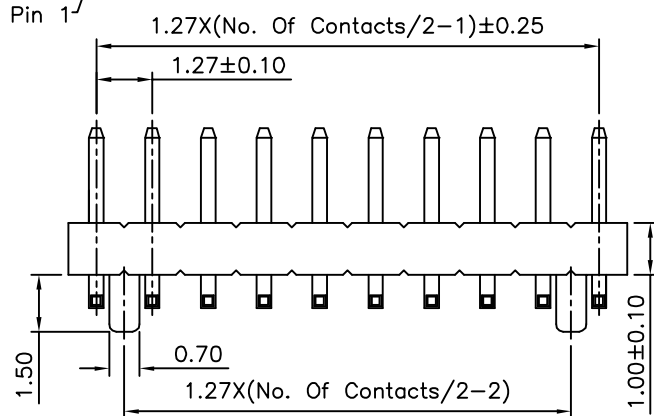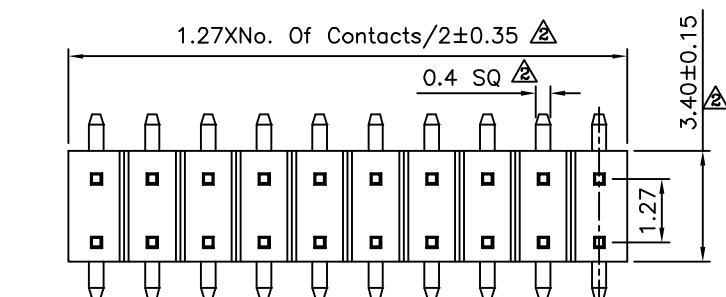

08~100 Pin

SPECIFICATION

Current Rating:1A
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:06~100 Contacts
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16898

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

SCALE


NONE

REV.

A2

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
1	A2	Modify Data	HZF	07/29/2011
2	A1	Modify Data	HZF	02/01/2007
3	A0	NEW RELEASE	HZF	12/02/2008