




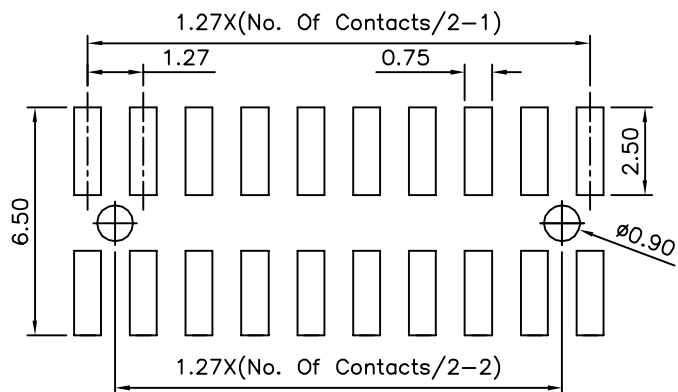



Recommended P.C.B. Layout

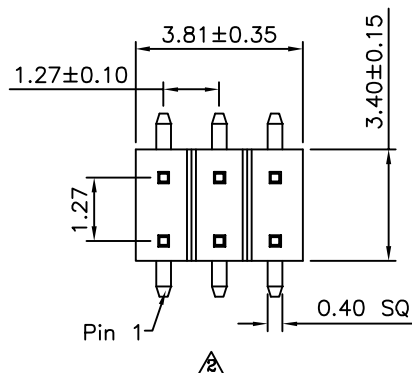



06 Pin



06 Pin



08~100 Pin

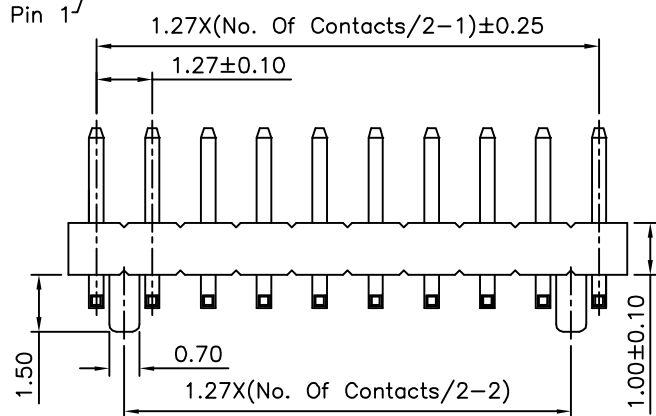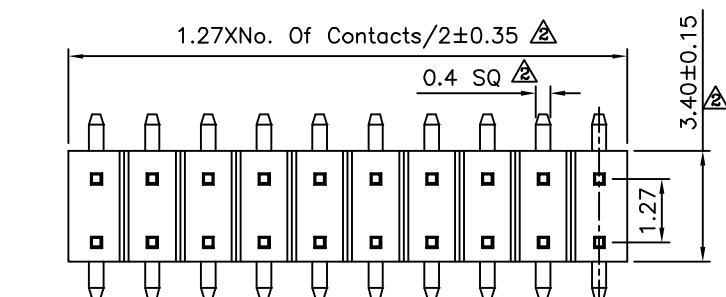

08~100 Pin

SPECIFICATION

Current Rating:1A
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:06~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16916

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
1	A2	Modify Data	HZF	07/29/2011
2	A1	Modify Data	HZF	02/01/2007
3	A0	NEW RELEASE	HZF	12/02/2008