


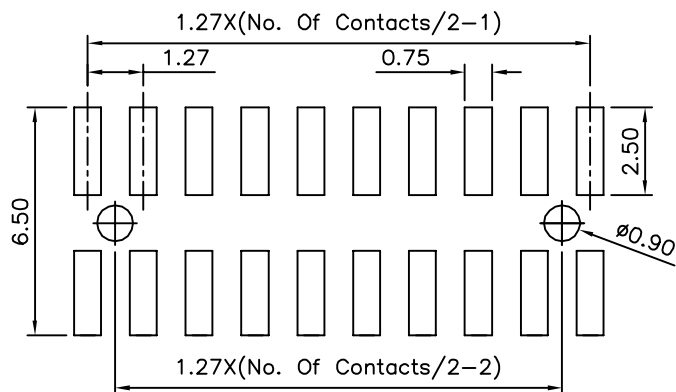
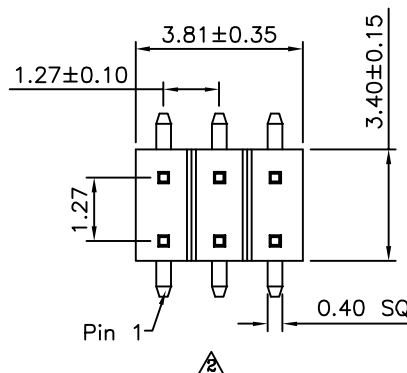
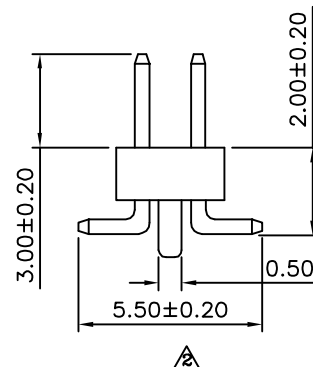
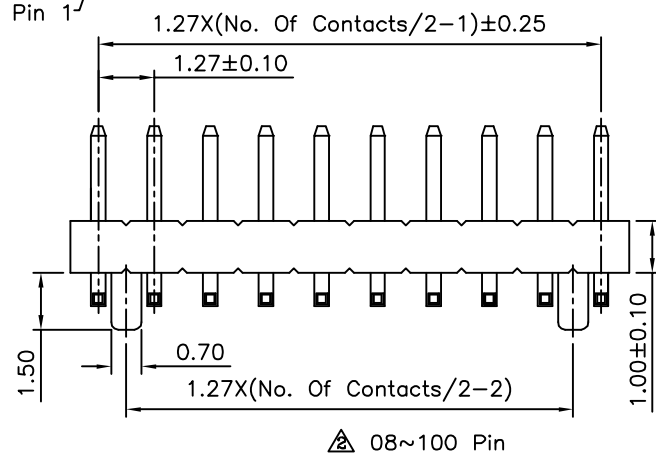




Recommended P.C.B. Layout



△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

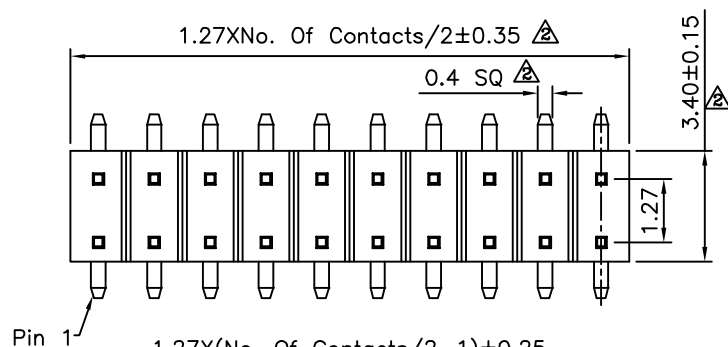

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16924

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT

mm

NO.

REV.

REVISIONS

CHK

DATE

△ A2	Modify Data	HZF	07/29/2011
△ A1	Modify Data	HZF	02/01/2007
△ A0	NEW RELEASE	HZF	12/02/2008