


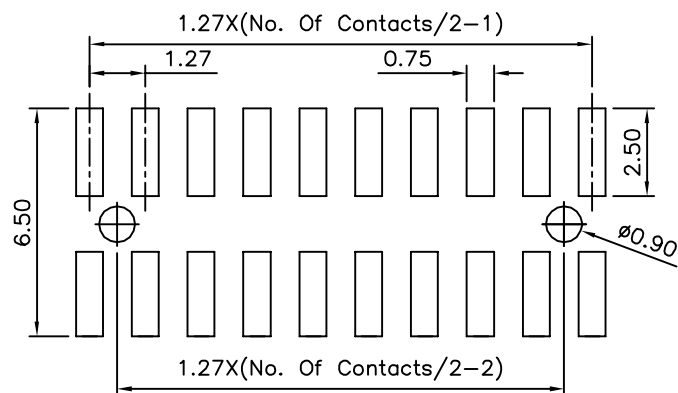


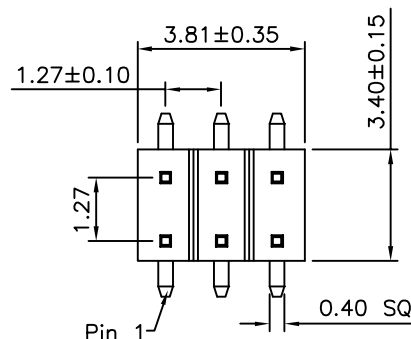




△ Recommended P.C.B. Layout



△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

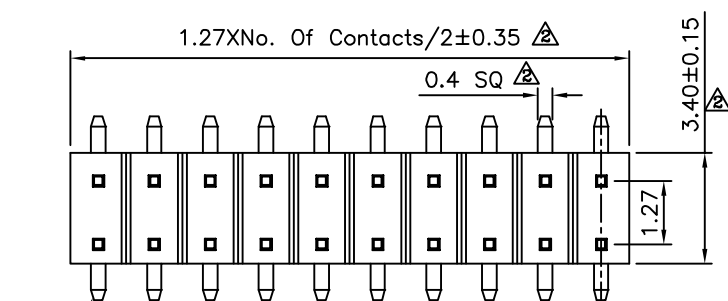

△ 06 Pin

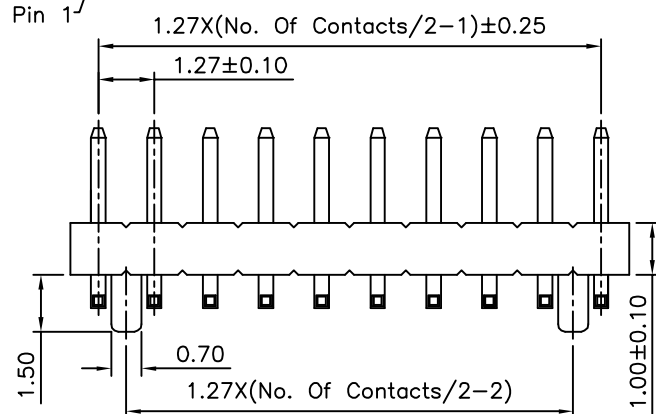

△ 2 08~100 Pin

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

16933

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY	
------------	--

DRAWING BY

WSS

REV.	
------	--

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X ± 0.38	
.XX ± 0.25	
ANG. $\pm 5^\circ$	

	UNIT
	100 100



	A2	Modify Data	HZF	07/29/2011
	A1	Modify Data	HZF	02/01/2007
	A0	NEW RELEASE	HZF	12/02/2008
NO	REV	REVISIONS	CHK	DATE