


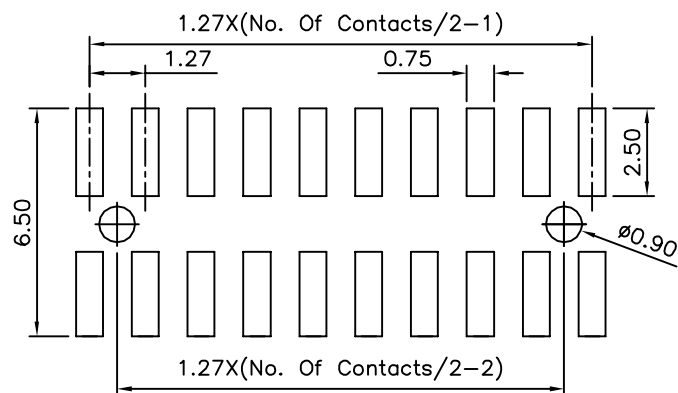


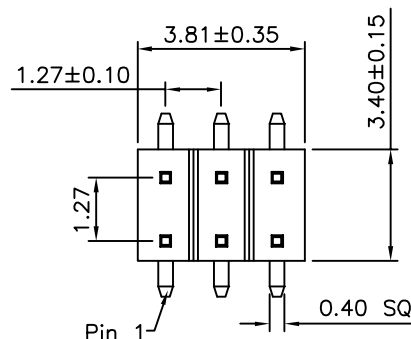



△ Recommended P.C.B. Layout




△ SPECIFICATION
 Current Rating:1A
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+105°C
 Insulator:PA6T(UL94V-O),Black
 Contact:Copper Alloys,Gold Flash
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

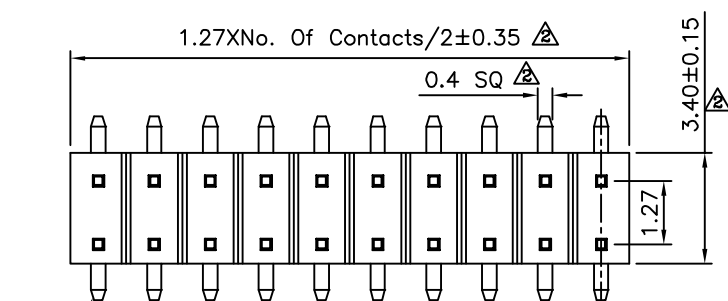

△ 06 Pin

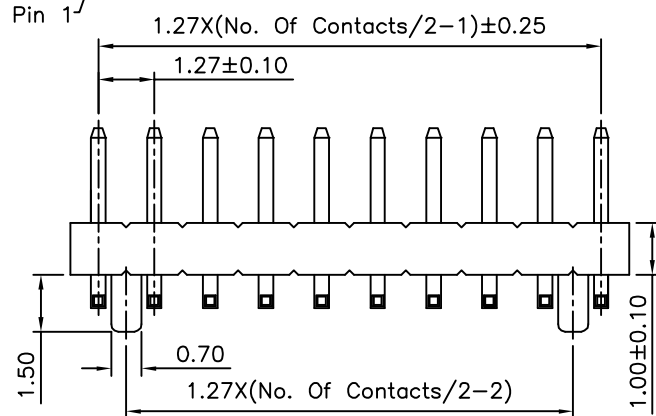

△ 2 08~100 Pin



2

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

16934

APPROVED BY

EMILY

CHECKED BY


DRAWING BY

WSS

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.38
.XX	± 0.25
ANG.	$\pm 5^\circ$

	UNIT
	mm



	AO
NO.	REV.

RELEASE

REVISIONS

HZF
CHK

DATE