


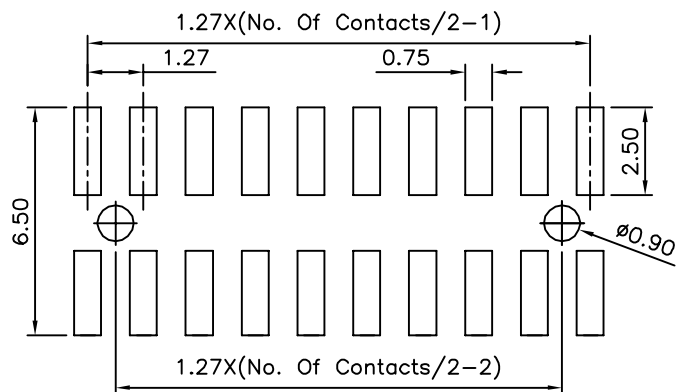


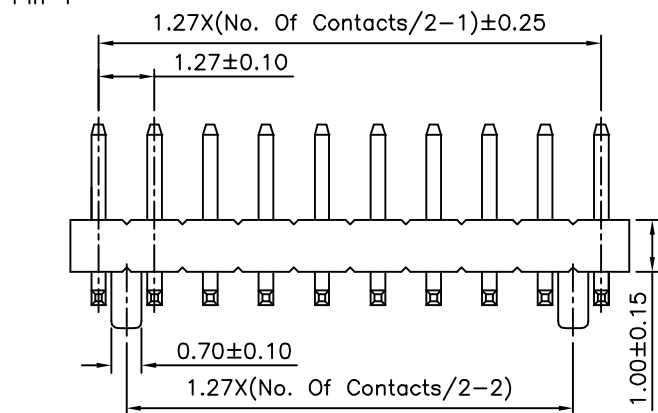


Recommended P.C.B. Layout

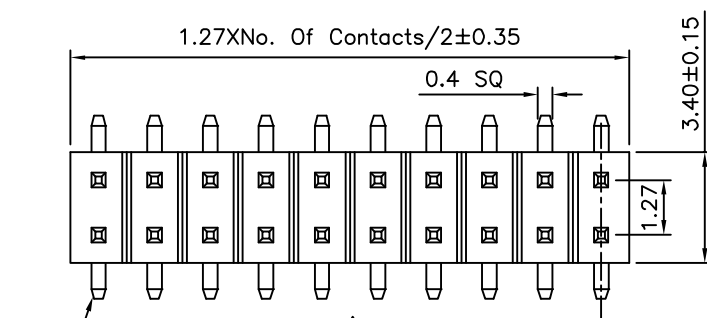


08~100 Pin

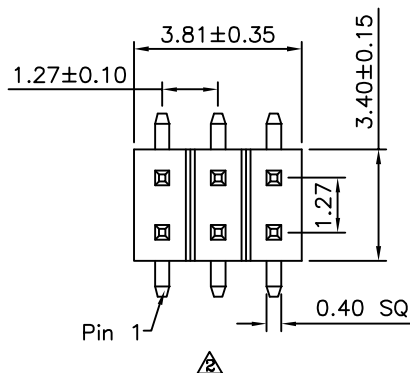


06 Pin

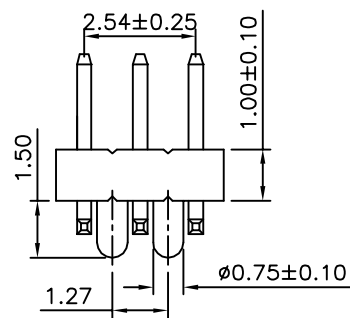

06 Pin



06 Pin

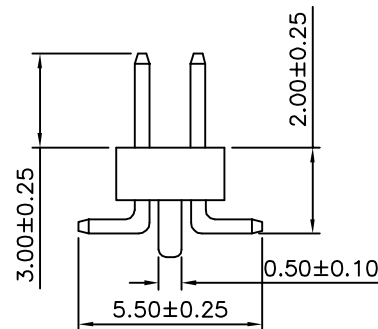

06 Pin

SPECIFICATION

Current Rating:1A
Withstand Voltage:1000V AC Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~100 Contacts
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16940

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A3

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



NO.

REV.

A3

A2

A1

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

HZF

HZF

DATE

DATE

DATE

06/13/2014

07/29/2011

02/01/2007

12/02/2008

DATE

DATE

DATE