


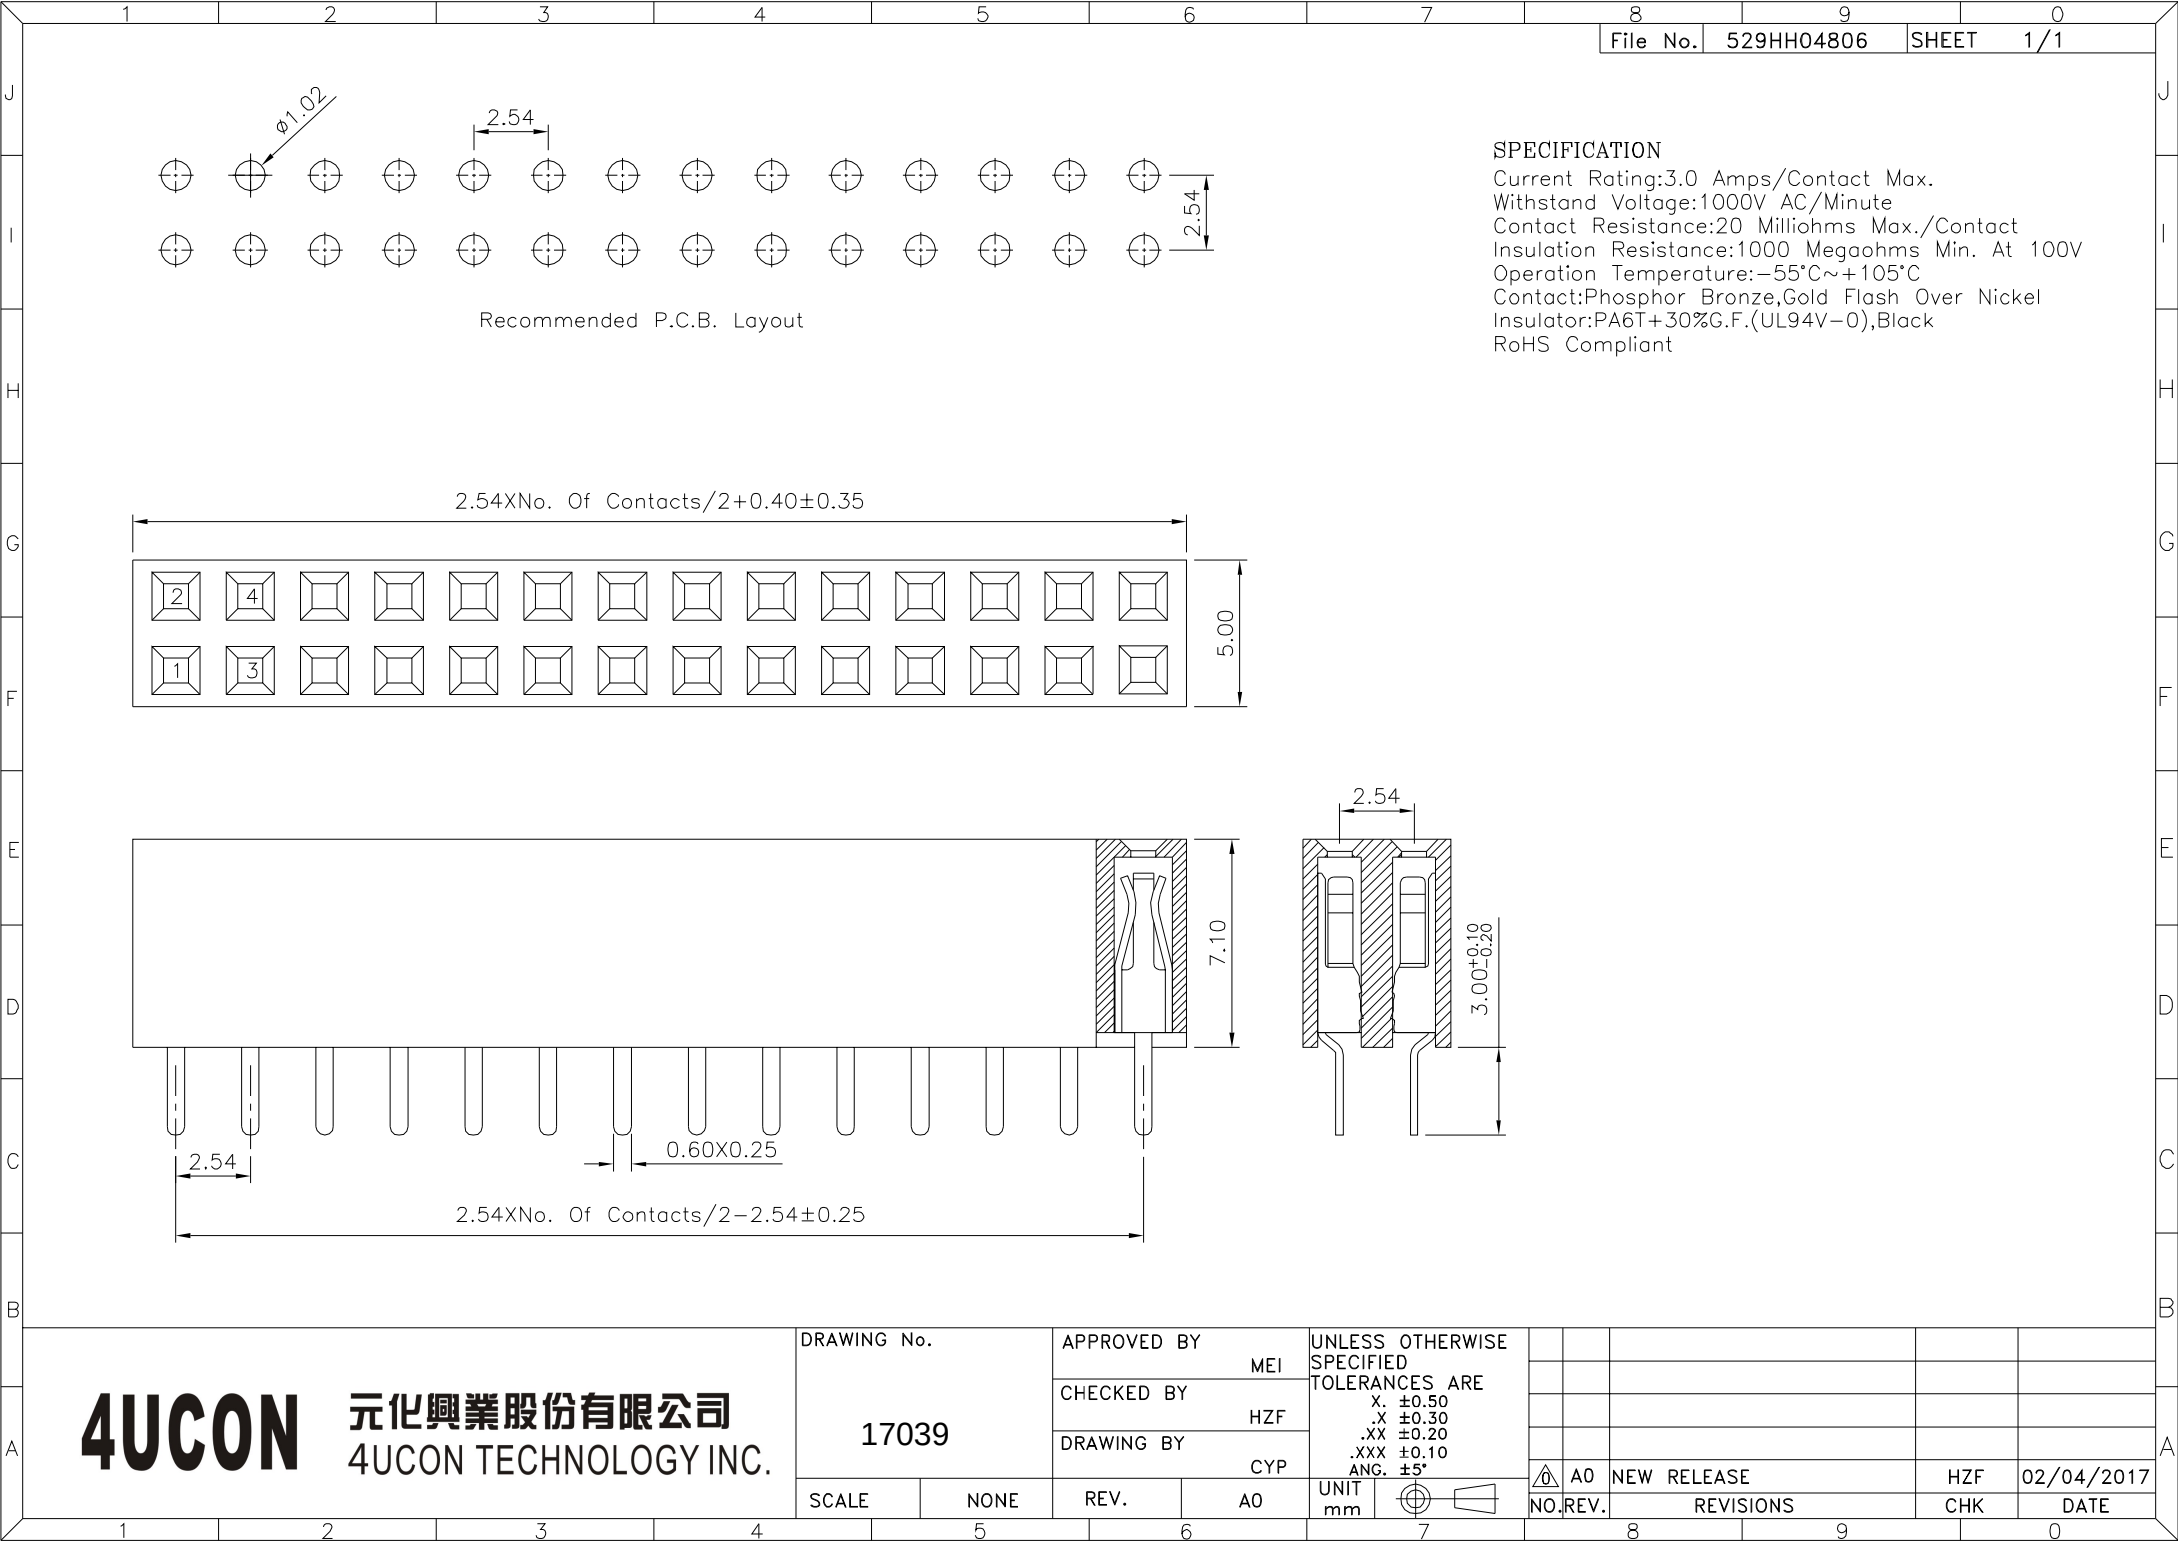

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout

$2.54 \times \text{No. Of Contacts} / 2 + 0.40 \pm 0.35$

5.00

7.10

0.60X0.25

$2.54 \times \text{No. Of Contacts} / 2 - 2.54 \pm 0.25$

2.54

$3.00^{+0.10}_{-0.20}$

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17039

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG. $\pm 5^{\circ}$

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

02/04/2017

DATE